

**MAINTENANCE INSTRUCTIONS
FOR MODEL MPR-5 RECEIVER**

TABLE OF CONTENTS

	<u>Page No.</u>
I. THEORY OF OPERATION	
General Description	5
II. DESCRIPTION OF MAJOR COMPONENTS	
1. Tuning Modules T1 thru T10	6
2. Tuning Module T11	6
3. Model B12 Basic Unit	6
4. Model FC-6 Frequency Counter	6
5. Model S9 Visual Display Unit	6
6. Model PS11 AC Power Supply	7
7. Carrier	7
8. Model BPl0 Rechargeable Battery Pack	7
9. Miniature Battery Pack	8
III. TROUBLESHOOTING	8
IV. TROUBLESHOOTING CHART	8
V. DISASSEMBLY/ALIGNMENT/ASSEMBLY OF TUNERS	
Tuners TMPR-1 thru TMPR-10	10
VI. B12 BASIC UNIT ALIGNMENT	11
VII. B12 MODULE DISASSEMBLY PROCEDURE	12
VIII. S9 MODULE DISASSEMBLY PROCEDURE	14
IX. FC-6 FREQUENCY COUNTER DISASSEMBLY PROCEDURE	15
X. INSTRUCTIONS FOR SETTING INTERNAL CONTROLS OF S9 MODULE	15

LIST OF ILLUSTRATIONS

Fig. 1	T-1 Schematic Wiring Diagram MPR-5	SWD-30881-B
Fig. 2	T-1 P.C. Board Assembly MPR-5	PWD-4223-C
Fig. 3	TMPR5-1 Assembly	30881-C
Fig. 4	T-2 Schematic Wiring Diagram MPR-5	SWD-30882-B
Fig. 5	T-2 P.C. Board ASsembly MPR-5	30892-A
Fig. 6	TMPR5-2 Assembly	30882-C
Fig. 7	T-3 Schematic Wiring Diagram MPR-5	SWD-30883-B
Fig. 8	T-3 P.C. Board Assembly MPR-5	30893A
Fig. 9	TMPR5-3 Assembly	30883-C
Fig. 10	T-4 Schematic Wiring Diagram MPR-5	SWD-30884-B
Fig. 11	T-4 P.C. Board Assembly MPR-5	30894-A
Fig. 12	TMPR5-4 Assembly	30884-C
Fig. 13	T-5 Scehmatic Wiring Diagram MPR-5	SWD-30885-B
Fig. 14	T-5 P.C. Board Assembly MPR-5	30895-A
Fig. 15	TMPR5-5 Assembly	30885-C
Fig. 16	T-6 Schematic Wiring Diagram MPR-5	SWD-30886-B
Fig. 17	T-6 P.C. Board Assembly MPR-5	30896-A
Fig. 18	TMPR5-6 Assembly	30886-C
Fig. 19	T-7 Schematic Wiring Diagram MPR-5	SWD-30887-B
Fig. 20	T-7 P.C. Board Assembly MPR-5	30897-A
Fig. 21	TMPR5-7 Assembly	30887-C
Fig. 22	T-8 Schematic Wiring Diagram MPR-5	SWD-30888-B
Fig. 23	T-8 P.C. Board ASsembly MPR-5	30936-A
Fig. 24	TMPR5-8 Assembly	30888-C
Fig. 25	T-9 Schematic Wiring Diagram MPR-5	SWD-30889-B
Fig. 26	T-9 P.C. Board ASsembly MPR-5	30937-A
Fig. 27	TMPR5-9 Assembly	30889-C
Fig. 28	T-10 Schematic Wiring Diagram MPR-5	SWD-30890-B
Fig. 29	T-10 P.C. Board Assembly MPR-5	30938-A
Fig. 30	TMPR5-10 Assembly	30890-C
Fig. 31	TMPR5-11 Schematic	SWD-30557-A
Fig. 32	Tuner #11 Assembly TMPR5-11	30557-C

Fig. 33	MPR-5 Carrier Schematic	SWD-30879-B
Fig. 34	Connector Mounting Plate Assembly	30891-C
Fig. 35	BP-10 Battery Pack Schematic Diagram	SWD-30880-A
Fig. 36	Battery Pack Assembly BP-10/MPR-5	30880-C
Fig. 37	PS-11A Power Supply Schematic Diagram	SWD-4138-B
Fig. 38	Pictorial, PS-11A Power Supply	PWD-4138-C
Fig. 39	P.C. Board Assembly PS-11A Power Supply	30412-D
Fig. 40	B-12 Upper Schematic Wiring Diagram	SWD-30877-D
Fig. 41	B-12 Upper Pictorial Wiring Assembly	PWD-4192-D
Fig. 42	B-12 Upper Wiring Pictorial	30952-D
Fig. 43	B-12 Lower Schematic Wiring Diagram	SWD-30878-C
Fig. 44	B-12 Lower Chassis Assembly	30953-D
Fig. 45	B-12 Lower P.C. Board Assembly	PWD-4221-B
Fig. 46	S9 Schematic Diagram	SWD-30655-D
Fig. 47	S9 Vertical Amp. P.C. Board Assembly	PWD-4194-D
Fig. 48	S9 High Voltage P.C. Board Assembly	PWD-4193-D
Fig. 49	S9 Saw-Tooth P.C. Board Assembly	PWD-4195-C
Fig. 50	S9 High Voltage and Saw-Topth Board Assembly	30657-C
Fig. 51	FC-6 Frequency Counter Schematic Wiring Diagram	30949-D
Fig. 52	FC-6 R.F. P.C. Board Assembly	PWD-4184-C
Fig. 53	FC-6 Logic P.C. Board Assembly	PWD-4185-C
Fig. 54	FC-6 L.C.D. P.C. Board Assembly	PWD-4186-C
Fig. 55	B12 Semiconductor and Coil Locations	
Fig. 56	Internal Adjustments of S9	
Fig. 57	B12 Battery Pack	30947-C

I. THEORY OF OPERATION

General Description

The Model MPR-5 miniprobe is a superheterodyne receiver using a voltage controlled oscillator. Single and double conversion are used. It is modular in construction consisting of the following components.

11 Plug-in Tuning Modules with the following Tuning Ranges:

T1	-	.02 to 15 MHz
T2	-	15 to 100 MHz
T3	-	100 to 200 MHz
T4	-	200 to 300 MHz
T5	-	300 to 400 MHz
T6	-	400 to 500 MHz
T7	-	500 to 600 MHz
T8	-	600 to 790 MHz
T9	-	790 to 1000 MHz
T10	-	1.0 to 1.6 GHz
T11	-	1.6 to 10 GHz

Model B12 Basic Unit

Model FC-6 Frequency Counter

Model S9 Visual Display Unit

Model PS-11A AC Power Supply

Carrier

Model BP-10 Rechargeable Battery Pack

Model B12 Battery Pack (Not Rechargeable)

Accessories as follows:

MEI #6206	2	Fuse
MEI #R-6292	1	Whip Antenna
MEI #6858	1	Ant. Cable
MEI #6860	1	Gator Clip Ass'y.
MEI #7807	1	Headset
MEI #7832	1	Headset Cord (R-7833)
MEI #7838	1	Adapter
MEI #30558	1	Long Wire Ant.
MEI #30561	1	Microwave Ant.
MEI #30562	1	Blocking Capacitor
MEI #30568	1	Short Wire Ant. Ass'y
MEI #6865	1	Battery Pack Output Cable
MEI #6866	1	Remote Tuner Cable (MPR-5)

II. DESCRIPTION OF MAJOR COMPONENTS

- 1.) Tuning Modules T1 through T10: Refer to Figs. 1 thru 30

Each of these tuning modules consist of a fixed RF bandpass filter for the particular tuning range. Also included in this module are trimming resistors for setting the range of the voltage controlled oscillator. The VCO is located in the B12 basic unit and is common to tuning heads T1 thru T10.

- 2.) Tuning Module T11: Refer to Figs. 31 and 32

This microwave tuning module (1.6 to 10 GHz) consists of a cavity tuned oscillator and mixer diode. The IF frequency generated after mixing is 23.5 MHz. All connections are made through the nine pin "D" connector. A sawtooth voltage is applied to pin 14 of the "D" connector for sweeping the oscillator for the visual display.

- 3.) Model B12 Basic Unit: Refer to Fig. 40 and 43

This module contains circuitry common to all tuning modules. It consists of:

- A.) IF Amplifier
- B.) Audio Amplifier
- C.) AM and FM Detectors
- D.) B.F.O.
- E.) Signal Strength Indicator
- F.) Wideband R.F. Amplifier
- G.) Subcarrier Detection Circuitry
- H.) Voltage Controlled Oscillator
- I.) Doubly Balanced mixers for single and double conversion
- J.) Xtal Oscillator used for double conversion

- 4.) Model FC-6 Frequency Counter: Refer to Fig. 51

This module functions as a very accurate frequency dial. It is a frequency counter which measures the local oscillator frequency and offsets it by the proper amount so that the display indicates the actual frequency to which the receiver is tuned. A liquid crystal display is used for the readout and has backlighting for low ambient light areas. A X 10 multiplier is supplied for one extra digit resolution. When this is used the most significant digit is dropped.

- 5.) Model S9 Visual Display Unit: Refer to Fig. 46

This module is used to obtain a spectrum display for both the RF carrier and subcarrier. It can also be used to display the demodulated signal. A variable sweep rate is used to synchronize the demodulated signal.

When displaying the R.F. spectrum the signal is obtained from the input of the IF amp. (23.5 MHz) and applied to the input of the 5 MHz bandwidth amplifier IC7 and IC6 where it is amplified. It is then applied to the doubly balanced mixer MX-1. The L.O. port of the mixer MX-1 is fed a sweeping osc. sig. from osc. IC4 with a maximum sweep width of 5 MHz. Sweeping is accomplished by applying a sawtooth voltage to varactor D10. The sawtooth voltage is generated by IC3. The amplitude of the sawtooth voltage can be varied by adjusting R4 (sweepwidth control). The mixer MX-1 converts the signal to 10.7 MHz where it is amplified and detected by IC5. It is then further amplified by IC2 and Q3/Q4 and applied to the cathode ray tube for display.

When displaying the subcarrier spectrum, a similar signal is generated in the B12 module (detected 0-300 KHz sig.) and applied to pin 7 of the "D" connector of the S9 module. It is then amplified by IC2 and Q3/Q4 and applied to the CRT for display.

Demodulated signals are applied at pin 9 of the "D" connector for display on the CRT. Switch SW-3 and R33 (rate vern) vary the sweep rate for synchronization. The microwave tuner (T11) swept signal is applied to pin 3 of the "D" connector for display on the CRT.

6.) Model PS-11 AC Power Supply: See Fig. 37

This module supplies DC output voltages of 9 volts and 27 volts for operating the circuitry in the B12, FC6, and S9. The 9 volts is regulated and is used for the audio amplifier and signal strength indicator circuitry. The 27 volts is fed to the B12 where it is regulated to 18 volts and used for all other circuitry. It is essential that the voltage supplying the V.C.O. be regulated to obtain stability. The power supply also has circuitry for connecting the antenna connector of the tuner to the power line for carrier current detection. It can be operated on either 115 or 230 volts AC 50 or 60 cycles.

7.) CARRIER: Refer to Fig. 33

The carrier contains the necessary connectors and wiring for connecting together the B12 basic unit, the FC6 frequency counter, the S9 visual display unit, and the power supply. It also can be used with the rechargeable battery pack for moving around to locate a source of R.F. radiation.

8.) MODEL BP-10 Rechargeable Battery Pack: Refer to Fig. 35

The battery pack consists of rechargeable gel cells that can

be recharged using the PS-11 power supply as a battery charger. A battery charge condition meter is included. Running time with full load is approximately two hours.

9.) Miniature Battery Pack.

The purpose of this battery pack is to allow the basic unit with one tuner and headphone to operate as a complete receiver. In this configuration it can be easily concealed. Operating time is two hours.

III. TROUBLE SHOOTING

The quickest way to isolate the trouble to a specific module is to replace it with a known good module. It is recommended to do this whenever possible. When the defective module has been identified, the following trouble shooting information should be used to replace easily replaceable suspect components. If identification of the defective component is complex, it is highly recommended that the entire module or receiver be returned to the factory for repair.

Before performing any troubleshooting on the Model S9 visual monitor, it is advisable to be certain that the internal controls are properly set. See Section X and Fig. 56 for this procedure.

IV. TROUBLESHOOTING CHART

Symptom	Cause	Remedy
Receiver completely inoperative	Open fuse	Replace fuse on PS-11 power supply panel.
	Defective AC line cord	Check with ohmmeter and replace if necessary.
	Defective PS11 power supply output cable	Check with ohmmeter and replace if necessary.
	No 27 volt or 9 volt from PS11 power supply	Use standard troubleshooting techniques to locate defective component in PS-11 power supply. Refer to Fig. 37, 38, 39.
	No tuning voltage applied to VCO	Replace IC6 in B12 module

Symptom	Cause	Remedy
Cathode Ray Tube does not light	Intensity control incorrectly set	Adjust intensity control. See fig. 56.
	CRT filament burned out.	Replace CRT. See section VIII for disassembly of S9 module.
Poor signal sensitivity in all bands	IF Gain control not at max. position	Rotate IF gain knob max. CW.
	Defective transistor or IC in B12 basic unit	See Section VII for disassembly of B12 module. Refer to Fig. 55. Replace Q1, Q2, Q3, IC2, IC7, IC4, IC5.
	IF amp. out of alignment	Realign IF amp. See Section VI.
No audio output. Sig. strength indicator indicates on station.	Audio Amp. defective	See Section VII for disassembly of B12 module. Refer to Fig. 55. Replace IC1.
BFO inoperative	Osc defective	See Section VII, Fig. 55 Replace Q4 in B12 module
	Xtal defective	Replace 23.5 MHz xtal in BFO ckt in B12 module. See Section VII.
No subcarrier audio output or display on S9 visual monitor	Subcarrier OSC inoperative	Replace Q9 in B12 module. See Section VII, Fig. 55
	Subcarrier osc. buffer amp. inoperative	Replace Q8 in B12 module. See Section VII, Fig. 55.
	Subcarrier amp/det. inoperative	Replace IC7 in B12 module. See Section VII, Fig. 55.
Subcarrier audio normal but no subcarrier display on visual monitor	Subcarrier osc. not sweeping	Sweep width control not set properly.
	S9 not getting signal.	Switch on bottom surface of S9 in wrong position.
Trace appears on CRT, but no signal display	Vertical amplifier inoperative.	Replace IC-2, Q3, Q4 in S9 module. See Section VIII. Fig. 47.
	Defective CRT	Replace CRT in S9 module. See Section VIII.

Symptom	Cause	Remedy
No trace on CRT	Horizontal sweep circuitry inoperative	Replace IC1, Q5, Q6, in S9 module. See Section VIII, Fig. 48.
	Horizontal position incorrectly adjusted	Adjust horizontal pos. control. See Fig. 56.
	Defective CRT	Replace CRT in S9 module. See Section VIII.
LED signal strength indicators do not light.	Defective LED packages.	Replace IC3, IC4, See Fig. 55.
Tuner insensitive and not covering proper range.	Tuner needs alignment	Realign Tuner. See Section V.
FC-6 frequency counter not indicating properly.	Tuner not seating properly in socket.	Reinsert tuning module
	Low voltage	See Fig. 51, 52, 53, 54 and Section IX. Check voltage at regulators Q4, Q5 and replace if necessary.
	Defective integrated circuit.	See Section IX. Replace integrated circuit.
Display of FC-6 frequency counter does not light.	No DC voltage getting to counter. Counter not seating properly in carrier.	Reinsert counter into carrier connector.
	No DC voltage getting to counter circuitry.	See Fig. 51 and Section IX. Replace voltage regulators

V. DISASSEMBLY/ALIGNMENT/ASSEMBLY OF TUNERS

Tuners TMPR-1 thru TMPR-10: Refer to proper Fig. (Fig. 1 thru 30)

Remove screw located at the rear of the tuner with the large diameter head near to the connector. Leave other screw in place. Carefully pull cover off tuner by holding knob in one hand and remove cover with other. Cover should be pulled away from front panel.

If the problem with tuner is that the band frequencies fall short of the required range, proceed as follows to realign:

- 1.) Plug tuner extension cable between tuner socket in B-12 basic unit and tuner so that the tuner (cover removed) is external to the basic unit.
- 2.) Turn power on and frequency counter on.
- 3.) Place tuner band switch in band to be adjusted. ["A" position is the low band (left), "B" position is the high band (right).]
- 4.) Rotate clock knob to zero position (CCW).
- 5.) Find blue trim potentiometer on tuner printed circuit board marked "A Lo" or "B" Lo".
- 6.) Using small screwdriver, adjust this trim pot until FC-6 reads correct frequency for corresponding band low end. Allow about 5% extra for band overlap.
- 7.) Now rotate clock knob to maximum CW to the "10" position.
- 8.) Adjust trim pot marked "A hi" or "B hi" depending on band being adjusted. Again allow about 5% frequency above band end for overlap.
- 9.) Repeat steps 4, 5, 6, 7, & 8 until both ends of band are correct. The "hi" and "lo" trim pots of each band are interdependent. The trimpots of band A & B are not dependent.
- 10.) It should be remembered that the sensitivity will start to degrade in overlap areas larger than 5%. The receiver will not function with the tuner on the extension cable. This cable is provided ONLY for trimpot alignment.

Reassemble tuner in the same manner as disassembly.

VI. B-12 BASIC UNIT ALIGNMENT

Proper electrical alignment of the B-12 should be done at the factory. Test equipment and experienced personnel are necessary for the alignment and therefore should not be attempted in the field. The only alignment that should be attempted is setting of the subcarrier adjustments as follows: Refer to Fig. 55.

- 1.) Set up complete system as per general operating instructions.
- 2.) Using antenna and local signal tune in signal on the T3A Tuner that is known to have a subcarrier.
- 3.) Place S9 monitor function switch in position 2.
- 4.) Now switch to subcarrier FM (monitor OFF) and set subcarrier tuning knob to full counter clockwise (zero frequency reading). Frequency counter should read 0.000. If it is between 0.010 and 9.990 do not adjust core (left side towards rear). If it is further off, adjust this core until it falls within this range.
- 5.) Now tune subcarrier transmission and adjust the core left side near L.E.D. meter for best sound. Also the right hand core near the L.E.D. meter may be re-peaked for maximum subcarrier signal level display on scope (position 4).

VII. B12 MODULE DISASSEMBLY PROCEDURE

- 1.) Remove six screws in top panel and remove top panel. This makes the IF semiconductors accessible for replacement. They can be identified in Fig. 55.

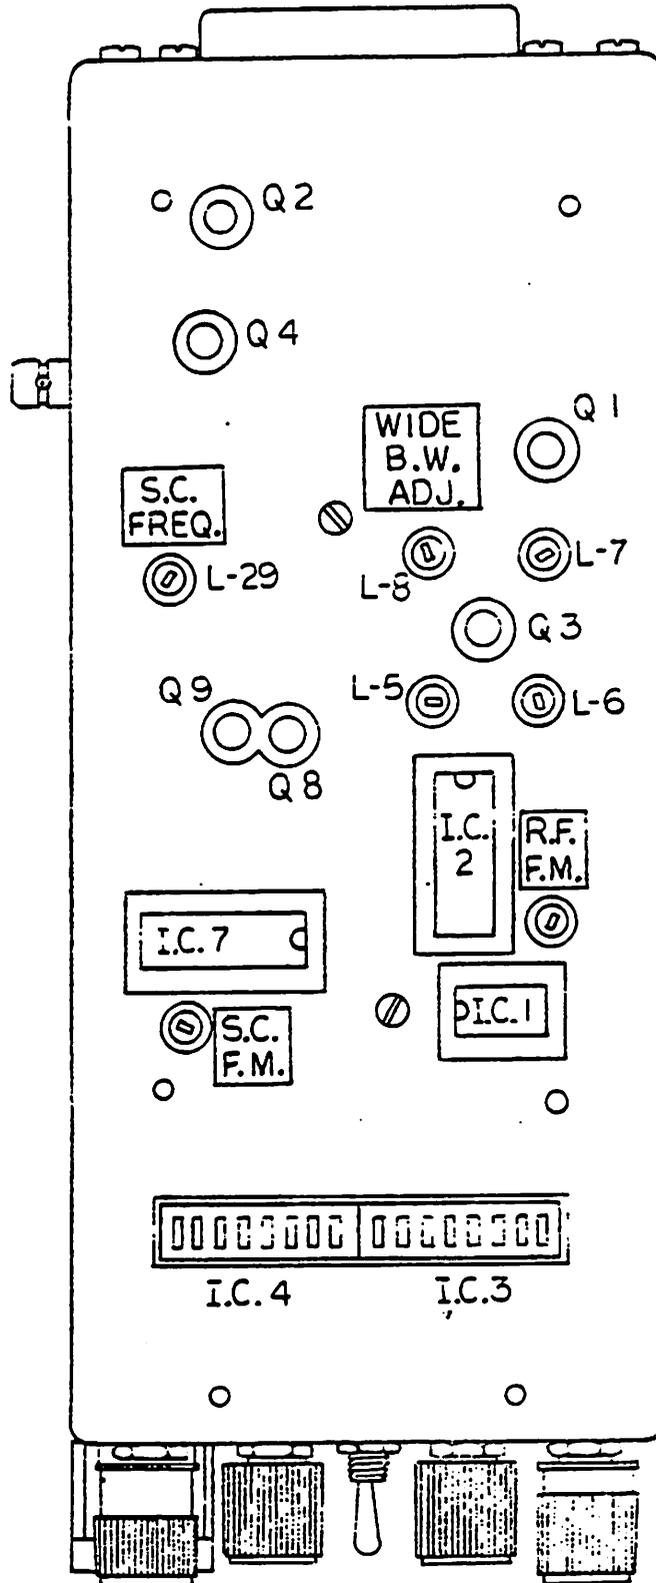


FIG. 55

- 2.) To disassemble lower unit, remove five flat head screws on bottom surface.
- 3.) Remove all flat head screws from sides of box and separate.
- 4.) Remove two pan screws from rear surface near edges.
- 5.) Slide chassis out from cover. The amplifiers in this unit are soldered in. If they are to be replaced, extreme caution should be taken to keep parts placement and lead length the same.

VIII. S9 MODULE DISSASSEMBLY PROCEDURE

- 1.) Remove four screws in top panel and remove panel.
- 2.) Using allen wrench, remove function knob and V gain knob.
- 3.) Pry off end cap on sig. cent. knob and use screwdriver to remove knob.
- 4.) Remove the three nuts now visible using a 5/16" nut driver.
- 5.) Remove the two flat head screws visible on the top surface.
- 6.) Remove the three flat head screws visible on the bottom surface.
- 7.) Remove the two flat head screws on the left side nearest the center.
- 8.) Separate the two sections of the box by pulling the small section outwards and backwards. This will permit accessibility for replacement of all semiconductors.
- 9.) To remove CRT for replacement.
- 10.) Remove thumbscrew from bottom of box.
- 11.) Remove the remaining three knobs and 5/16" nuts.
- 12.) Remove flat head screws from left side of case.
- 13.) Remove shock mounting material on both sides of the CRT.
- 14.) Remove CRT and Ckt. board assembly from box.

IX. FC-6 FREQUENCY COUNTER DISASSEMBLY

The FC-6 has no internal adjustments. To replace components dismantle as follows:

- 1.) Remove 4 top panel screws and panel.
- 2.) Remove 2 upper front panel screws and 2 control nuts and remove front panel.
- 3.) Now remove remaining top and bottom screws and pull left and right covers apart. A screwdriver may be needed to pry them apart. The display and resolution control will remain with the right cover. The power switch and rear plug will remain with the left cover. The male/male jumper connector between the 2 boards may remain in either socket. Be sure you do not bend these pins when separating the 2 halves.
- 4.) The 2 PC boards may be removed from their covers by removing the 4 mounting screws and the rear plug screws and nuts and the resolution control nut.
- 5.) If the display must be replaced, remove the 3 3-56 flat head screws from the clear plastic LCD retainer and remove display. The display itself is further contained within a molded box with 2 "zebra" contact strips. Observe carefully the dismantling of this assembly before attempting reassembly. Note polarity of pin alignment. Important: be sure the PC board contacts are absolutely free of dirt and moisture when reassembly is made. Do not tighten 3 retaining screws too tight but evenly causing a slight bow in the clear plastic retainer.
- 6.) Removal and replacement of IC's can cause bent and damaged pins. Appropriate care must be taken.
- 7.) When re-engaging the 2 halves of the box, make sure the male/male jumper connector between the two P.C. boards is properly aligned.

X. INSTRUCTIONS FOR SETTING INTERNAL CONTROLS OF S9 MODULE

Refer to Fig. 56.

- 1.) S-9 Visual Display Unit

To adjust internal controls, remove 4 small screws from top panel and remove panel. The control potentiometers are now accessible and are identified by the cover graphics nearby.

All of these potentiometers are 20 turn type with slip clutches at travel limits. Clicking noise is heard when limit is reached.

1.1 Internal Adjustments of S9

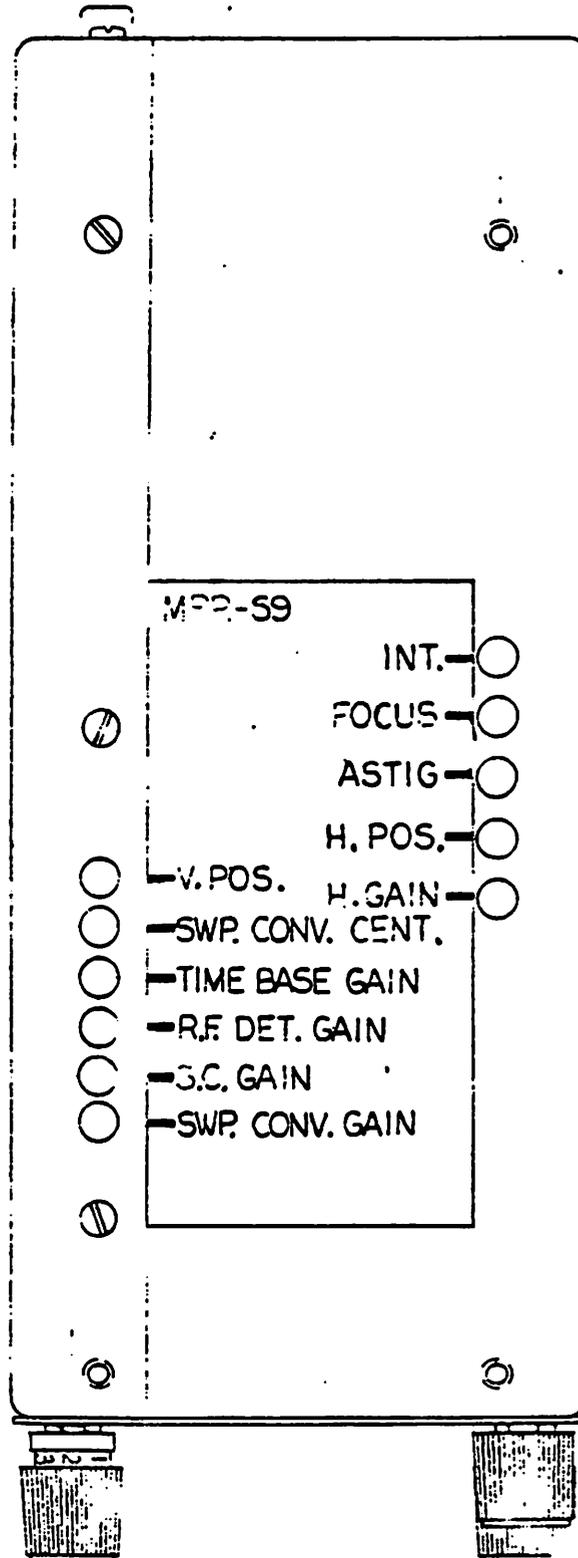


FIG. 56

- 1.2 Setting intensity, focus and astigmatism - (always use AC power (PS-11A) when making any of the following settings).
 - a.) Set S-9 time base (4) with basic unit volume at minimum (CCW) and vertical gain so line appears on screen.
 - b.) Set rate and vernier for minimum CCW (slowest speed).
 - c.) Set intensity for maximum brightness.
 - d.) Set focus and astigmatism for sharpest, roundest, dot when it crosses the center.
 - e.) Brightness may be backed off for use in darkened ambient light. Other controls may have to be reset.
- 1.3 Horizontal Gain and center settings
 - a.) Now set vernier maximum with rate switch still at minimum (50 Hz).
 - b.) Set H gain and H centering so that line just fills screen side to side and is centered.
- 1.4 Vertical Position setting
 - a.) Set S-9 function to T11 (3).
 - b.) Set B-12 IF gain to minimum (CCW).
 - c.) Set S-9 vertical gain to minimum (CCW).
 - d.) Now adjust vertical position so that the base line is slightly above the bottom edge of the screen.
- 1.5 Swept Converter Gain Setting
 - a.) Set S-9 function switch to "RF" (1).
 - b.) Remove antenna from B9.
 - c.) Insert T10 tuner at any frequency.
 - d.) Set S-9 vertical gain to maximum (CW).
 - e.) Now adjust "swept conv gain" so that a small amount of "grass" or noise appears on the base line. This base line average will rise up slightly.

1.6 Subcarrier gain setting

- a.) Set S-9 function switch to "sc" (2).
- b.) Set B-12 function switch to SCFM (3).
- c.) Remove antenna from B12.
- d.) Set B-12 IF gain to maximum CW.
- e.) Insert T-6 tuner at any frequency so long as NO signals appear on screen.
- f.) Set B-12 subcarrier tuning control to about 250 KHz.
- g.) Set S-9 vertical gain to maximum (CW)
- h.) Now set subcarrier gain so that noise fills about $\frac{1}{2}$ the vertical area of the screen. (This is set much higher than the "RF" and "T-11" modes because when signals are tuned in on RF-FM they quiet the IF noise to the subcarrier amplifiers thus reducing the noise on the display.)

1.7 RF Detector Gain Setting (T11)

- a.) Set S-9 function switch to "T11" (3)
- b.) Insert T-11 tuner into basic unit and set dial at about 2.5 GHz.
- c.) Set B-12 IF gain to maximum CW.
- d.) Set B-12 function switch to wide bandwidth (5).
- e.) Set S-9 vertical gain to maximum (CW).
- f.) Now set RF detector gain so that about 1/8 inch of noise appears on the base line.

1.8 Time Base Gain Setting

- a.) Set S-9 function switch to "time base" (4)
- b.) Set B-12 Volume control to minimum (CCW).
- c.) Set S-9 vertical gain control to maximum (CW).
- d.) Now set time base gain so that base line is about one vertical division from TOP of screen. (This is so that signals with more negative going than positive going components can utilize the whole

screen area. Remember that in the time base mode the vertical gain control is used more for positioning and the basic unit volume control is used for vertical gain.

1.9 Swept Converter Centering Setting

a.) Set S-9 function to "RF" (1). (The swept converter centering control is a fine tune adjustment to set the one signal tuned in, heard, and seen on the "S" meter, to the center of the S-9 base line thus identifying the proper signal by location on the base line.)

b.) Set all other controls as follows:

Function - "1 RF"

Power - toward front (found under S-9)

V Gain - clockwise until noise appears on base line

Swp. Width - Mid position

Rate - Position "1" (10-50 Hz)


Vernier - Maximum clockwise

c.) Select a steady fairly high level signal that has no near by signals to use for alignment. AM signals are best since their frequency is stationary. Try around 1 MHz. If an uncrowded area is hard to find, try the sound channel of a TV station even though it is FM, it is spaced from nearby signals.

d.) Set the B-12 to narrow bandwidth (1) and very accurately tune the signal for loudest noise and highest "S" meter reading even if distorted.

e.) Now set the S-9 visual signal to the exact center of the screen with the swept converter signal centering trimmer. Be sure the horizontal centering and gain have been preadjusted according to 1.3. If the center cannot be reached, return the trimmer to the mechanical center (10 turns from end) and set internal coil (L10) of the vertical P. C. board for the center. Then fine tune with the trimmer adjustment.

DATE	REV	REVISION RECORD	AUTH	DR	CHK

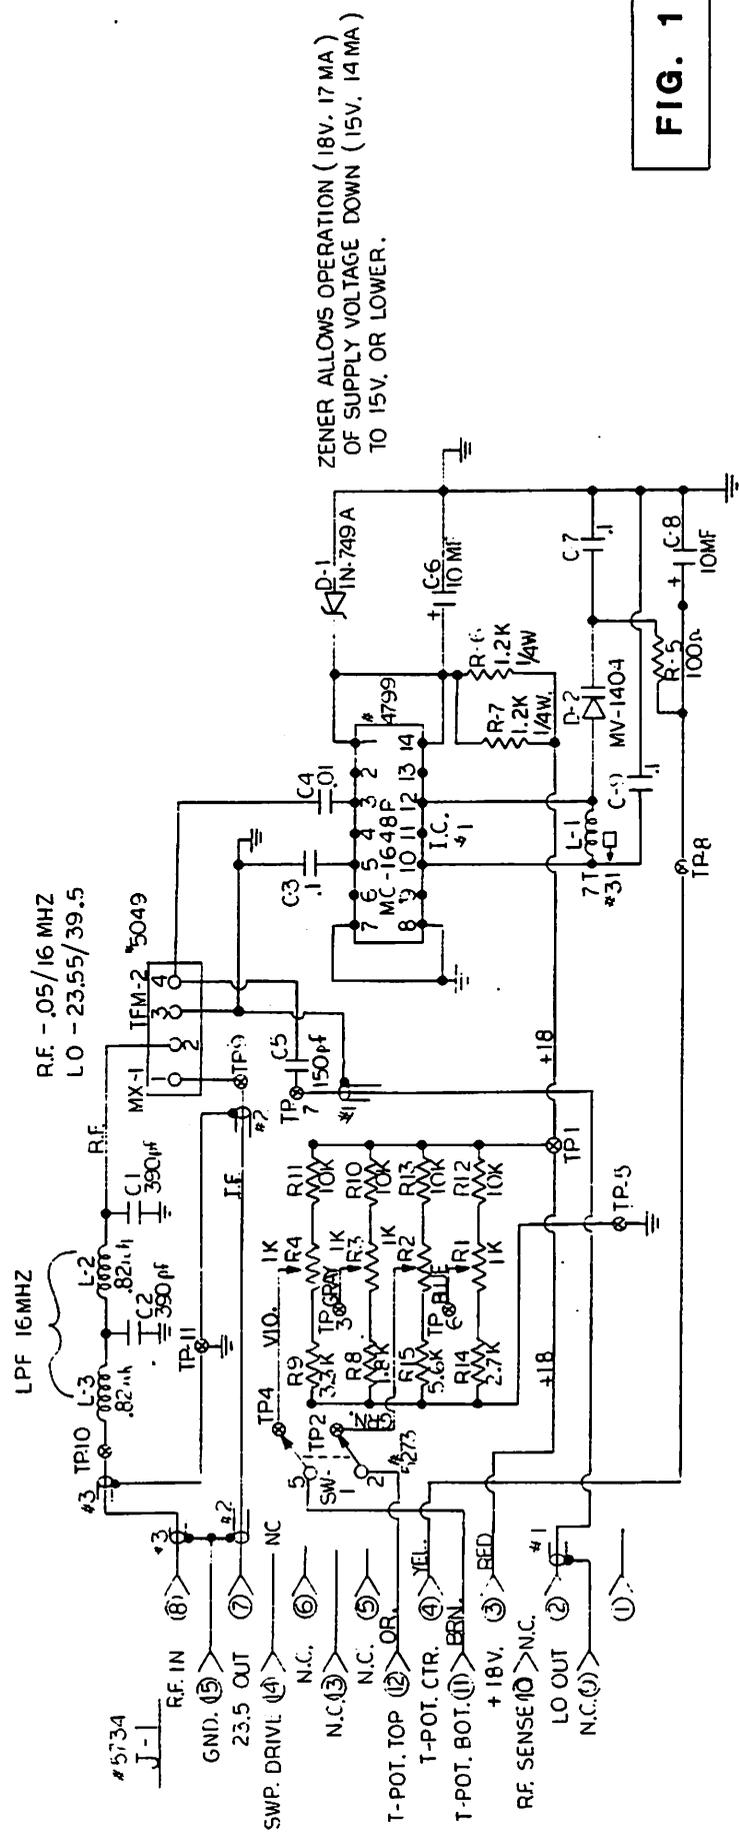

ZENER ALLOWS OPERATION (18V. 17 MA) OF SUPPLY VOLTAGE DOWN (15V. 14 MA) TO 15V. OR LOWER.

FIG. 1

NOT REPRODUCIBLE
PROPERTY OF
F. G. MASON ENGINEERING, INC.

TOLERANCES (EXCEPT AS NOTED)	DECIMAL	SCALE	DRAWN BY	APPROVED BY
	1/100	1/10	TMPS-1	[Signature]
	1/1000	1/100	TITLE	
	1/10000	1/1000	T-1 SCHEMATIC WIRING DIAGRAM MPR 5	
	1/100000	1/10000	DATE	DRAWING NUMBER
			3-27-85	SWP-30881-R
				ISSUE
				6

BAND	LO	RF	V	R
A	23.5/28.5	2 - 5 MHz	3.55 - 4.77	
B	28.5/38.5	5 - 15 MHz	4.31 - 5.99	

ER-

REV	NO	DESCRIPTION	DATE	BY

CIR. NO.	REQ.	PART NO.	DESCRIPTION
1	1	AM422-A	PC BOARD AS MACH.
2			
3			
4	1	5049-A	MIXER TFM-2
5	1	4799-A	IC *MCK-10p
6	1	5493-A	IC *XAFET H-FIN
7	1	3042-A	COIL
8	1	3210-?	COIL CAN
9	11	5413-A	TERMINALS
10	1	1608-?	TFN1 POT. 1 K
11			
12	1	4522-A	DIODE *IN 749 A
13	1	4559-A	DIODE ZENER *NVI-104
14	2	3619-A	CAP *KE .92 .25
15	2	0181	CAPACITOR 330M
16	2	0194	CAPACITOR 10MF
17	3	0191	CAPACITOR 1MF
18	1	0190	CAPACITOR 0.1MF
19	1	0175	CAPACITOR 100pF
20	2	10-TTR-3-2	RESISTOR 1.2K 1/4W 5%
21	1	10-TFT-2-2	RESISTOR 100K 1/4W 5%
22	1	10-TSR-2-2	RESISTOR 1.8K 1/4W 5%
23	1	10-QOR-2-2	RESISTOR 3.3K 1/4W 5%
24	4	10-TBO-2-2	RESISTOR 10K 1/4W 5%
25	1	10-TAR-2-2	RESISTOR 2.7K 1/4W 5%
26	1	10-GAR-2-2	RESISTOR 56K 1/4W 5%

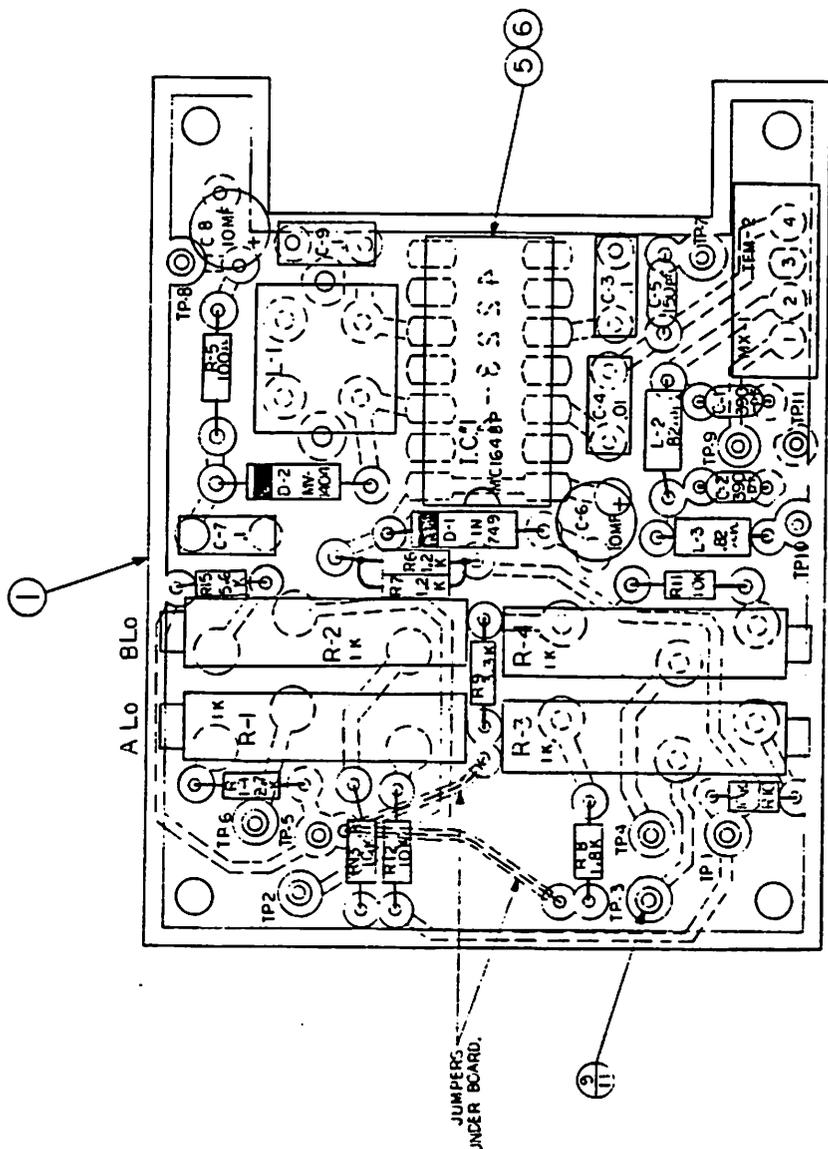


FIG. 2


MULTI-CORPORATION
 PROPERTY OF
 P. G. MASON ENGINEERING, INC.

TOLERANCES UNLESS OTHERWISE SPECIFIED	DECIMAL	FRACTIONAL	TITLE
			T-1 PC BOARD ASSEMBLY MPR-5
			DATE 5-9-85
			DESIGNING NUMBER FW1-1223-C

ER-
 T-30881-C
 USED ON

WIRE LIST :

FROM :	TO :	COLOR :	LENGTH :
J-1 PIN # 2	TP-7	COAXIAL (SOLID)	
J-1 PIN # 9	TP-7	COAXIAL (SOLID)	
CONNECT OTHER END OF ABOVE BRAD TO CENTER PLANE.			
J-1 PIN # 3	TP-1	WFL	
J-1 PIN # 7	TP-9	WFL	
J-1 PIN # 15	TP-9	COAXIAL (SOLID)	
CONNECT OTHER END OF ABOVE BRAD TO TP-11			
J-1 PIN # 6	TP-10	WFL	
J-1 PIN # 15	TP-10	WFL	
CONNECT OTHER END OF ABOVE BRAD TO GROUND PLANE.			
SW-1 PIN # 11	SW-1 PIN # 2	ORANGE	
J-1 PIN # 12	SW-1 PIN # 5	BROWN	
J-1 PIN # 4	TP-8	YELLOW	
SW-1 PIN # 1	TP-6	BLUE	
SW-1 PIN # 3	TP-2	GREEN	
SW-1 PIN # 4	TP-3	GRAY	
SW-1 PIN # 6	TP-4	VIOLET	
	TP-5 (GND.)	BUS WIRE	

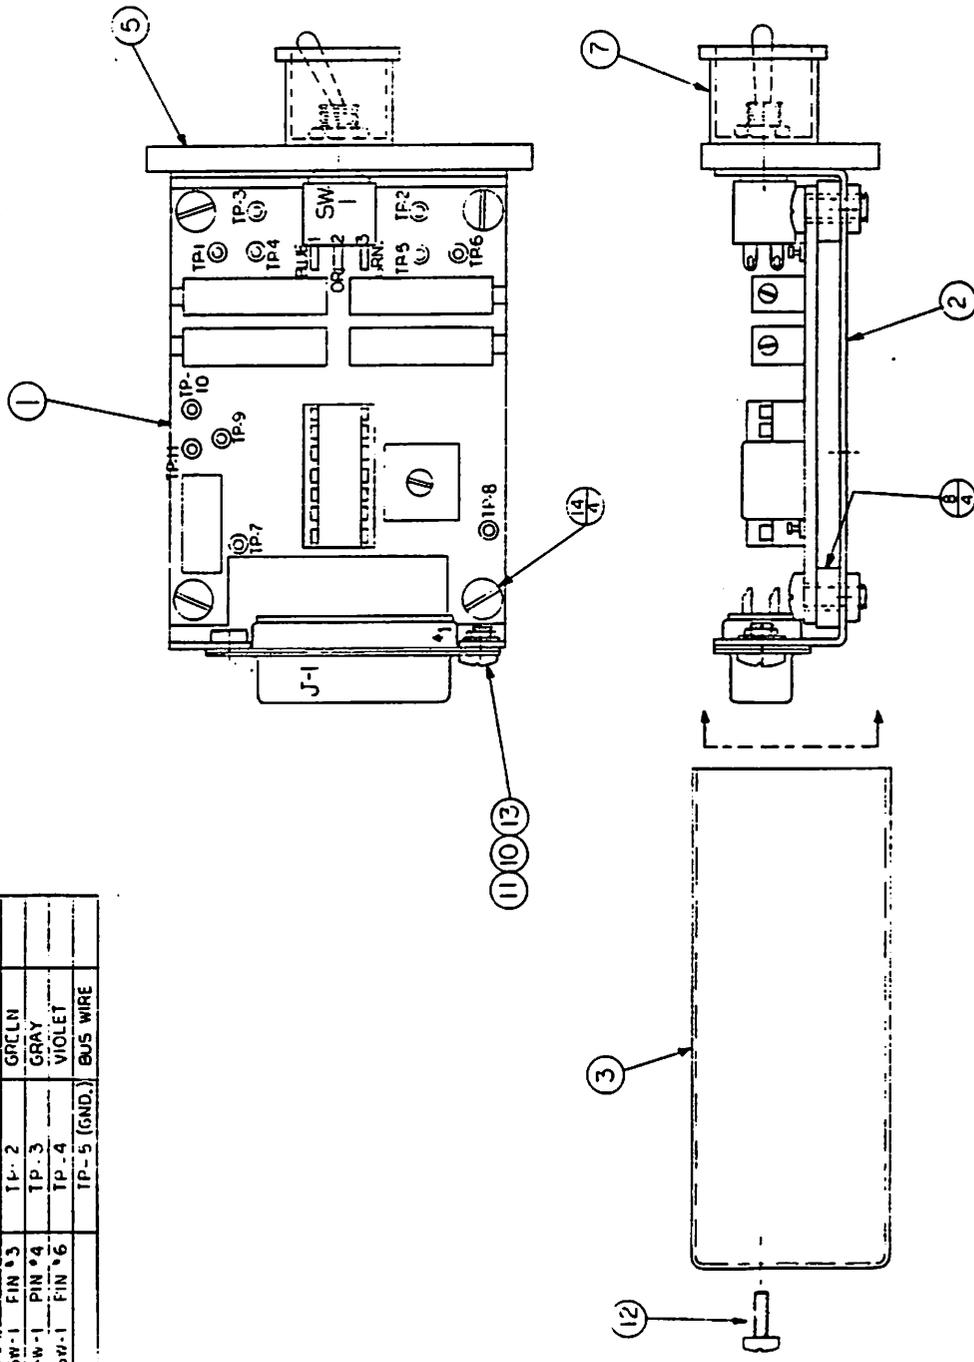

CIR. NO.	REQ.	PART NO.	PART DESCRIPTION
1	1	18001-A	LOCK-WASHER #4
2	1	18001-A	HEX NUT 4-40
3	1	4408-CSS	9/16X1/4
4	1	4408-CSS	9/16X1/4
5	1	4408-CSS	9/16X1/4
6	1	4408-CSS	9/16X1/4
7	1	4408-CSS	9/16X1/4
8	1	4408-CSS	9/16X1/4
9	1	4408-CSS	9/16X1/4
10	1	4408-CSS	9/16X1/4
11	1	4408-CSS	9/16X1/4
12	1	4408-CSS	9/16X1/4
13	1	4408-CSS	9/16X1/4
14	1	4408-CSS	9/16X1/4
15	1	4408-CSS	9/16X1/4
16	1	4408-CSS	9/16X1/4
17	1	4408-CSS	9/16X1/4
18	1	4408-CSS	9/16X1/4
19	1	4408-CSS	9/16X1/4
20	1	4408-CSS	9/16X1/4
21	1	4408-CSS	9/16X1/4





FIG. 3

SECRET/CONFIDENTIAL
PROPERTY OF
MASON ENGINEERING INC.

DESIGNED BY	DATE	REVISED BY	DATE
DR	11-89	DR	11-89
CHECKED BY	DATE	REVISED BY	DATE
DR	11-89	DR	11-89
TITLE	MASON ENGINEERING INC.		
SCALE	2 X		
PROPERTY	MASON ENGINEERING INC.		
ADDRESS	1700 POST RD. FAULTON, MASS. 01525		
PHONE	(617) 875-1100		
FAX	(617) 875-1100		
TELETYPE	800-541-1100		
EMAIL	mason@engr.com		
WEBSITE	www.masonengr.com		

DATE	REVISION RECORD	AUTHOR	CHK
11/17/53	As per SWD-30882-B	W.E.	

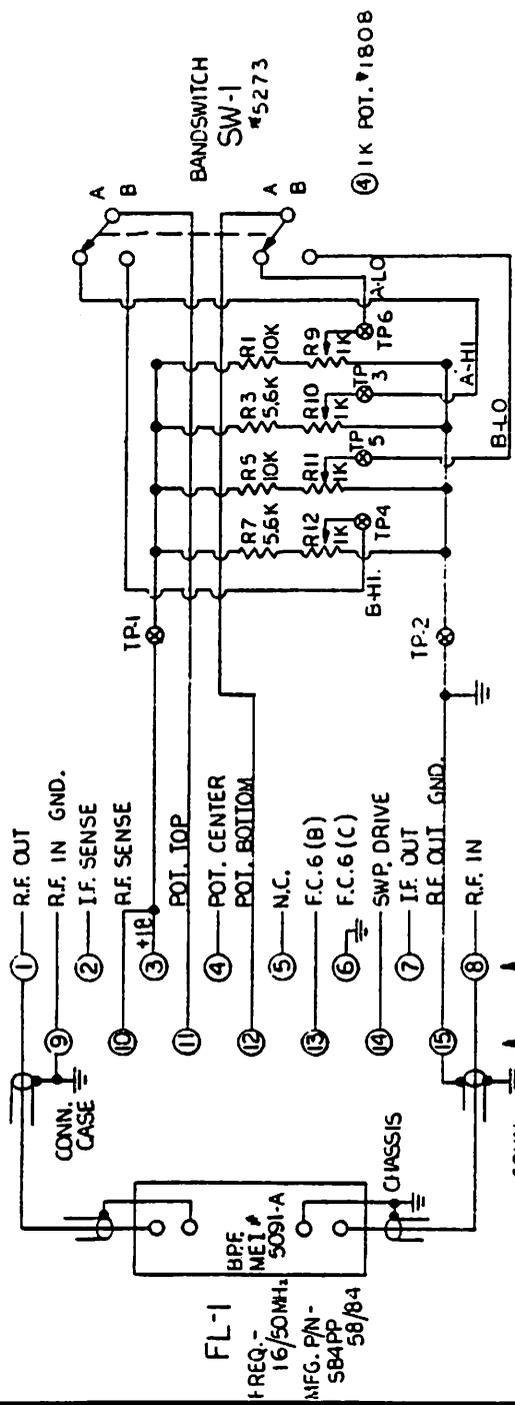

R.F. MHz	LO MHz	VCO VC (K)		
		V ₁	V ₂	K
BAND A	14/55	128/170	.3 / .8	R ₁ / R ₂ 5.9 / 351
BAND B	45/110	160/225	.8 / 1.25	17 / 364
IF.	115			

APPROX.

FIG. 4

SECRET / CONFIDENTIAL
PROPERTY OF
F. G. MASON ENGINEERING, INC.


TOLERANCES UNLESS OTHERWISE SPECIFIED	DECIMAL	SCALE	APPROVED BY
	1/2	1/2	SIN
	FRACTIONAL		
	1/2		
	ANGULAR		
	1/2		
MASON ENGINEERING INC. 1700 POST RD. FAIRFIELD CONN.		DRAWN BY SIN	
TITLE		M.P.R.	
T-2 SCHEMATIC WIRING DIAGRAM		5	
DATE	DRAWING NUMBER	ISSUE	
2-13-84	SWD-30882-B	3	

ER-

DATE	SYM	REVISION RECORD	AUTH.	DR.	CK.

CIR. NO.	NO. REQ.	PART NO.	DESCRIPTION
1	1	4222-A	P.C. BOARD
2	6	5436-A	TERMINAL PINS
3	4	1808-A	POT. 1K
4	2	10-TBO-2-2	RES. 10K 1/8W. 5%
5	2	10-GAR-2-2	RES. 5.6K 1/8W. 5%


LOOP RESISTOR LEADS
AS SHOWN - TYPICAL.

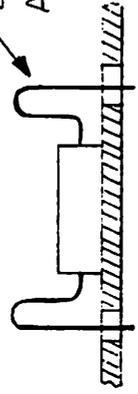

SECRET / CONFIDENTIAL
PROPERTY OF
F. G. MASON ENGINEERING, INC.

FIG. 5

TOLERANCES (EXCEPT AS NOTED)	DECIMAL	FRACTIONAL	ANGULAR
±	±	±	±
<p>© MASON ENGINEERING INC. 1700 POST RD FAIRFIELD, CONN</p>			
SCALE	DRAWN BY <i>[Signature]</i>		
2X	APPROVED BY		
TITLE			
T-2 P.C. BOARD ASSEMBLY MPR-5			
DATE	DRAWING NUMBER	ISSUE	
11-12-85	30892-A	3	

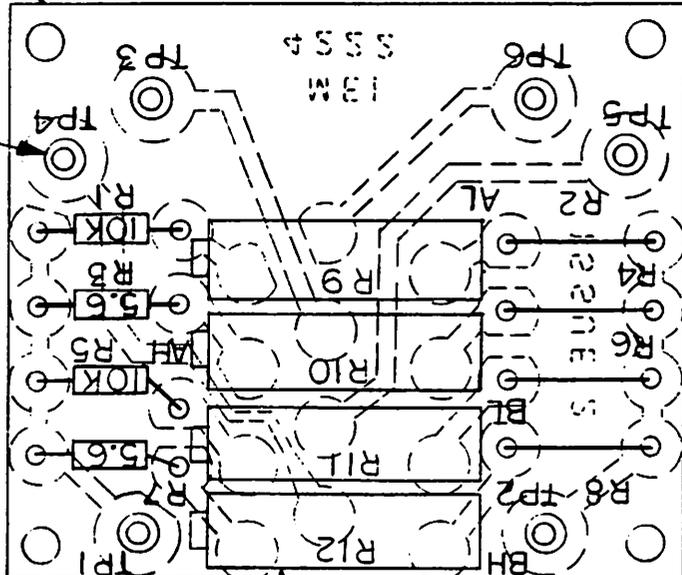

ADD JUMPERS IN
PLACE OF RESISTORS - AS SHOWN.



130882-C	USED ON
----------	---------

E.R.

WIRING LIST -

FROM -	TO -	COLOR -	LENGTH -
J-1, PIN #1	FL-1	COAX #1 GEN	1.5
J-1, PIN #9	FL-1	COAX #1 REAR	1.5
J-1, PIN #8	FL-1	COAX #2 REAR	1.5
J-1, PIN #15	FL-1	COAX #2 REAR	1.5
J-1, PIN #10	TP-1	RED	1.5
J-1, PIN #3	TP-1	RED	1.5
J-1, PIN #11	SW-1, PIN #2	BROWN	1.5
J-1, PIN #12	SW-1, PIN #5	BROWN	1.5
J-1, PIN #6	SW-1, PIN #6	ORANGE	1.5
		SOLDER TO SHELL OF CONN. WIRE	
SW-1, PIN #1	TP-3	YELLOW	1.5
SW-1, PIN #3	TP-4	GREEN	1.5
SW-1, PIN #6	TP-5	BLUE	1.5
SW-1, PIN #4	TP-6	VIOLET	1.5
TP-2	FL-1 REAR OF COAX #1	BLACK	1.5

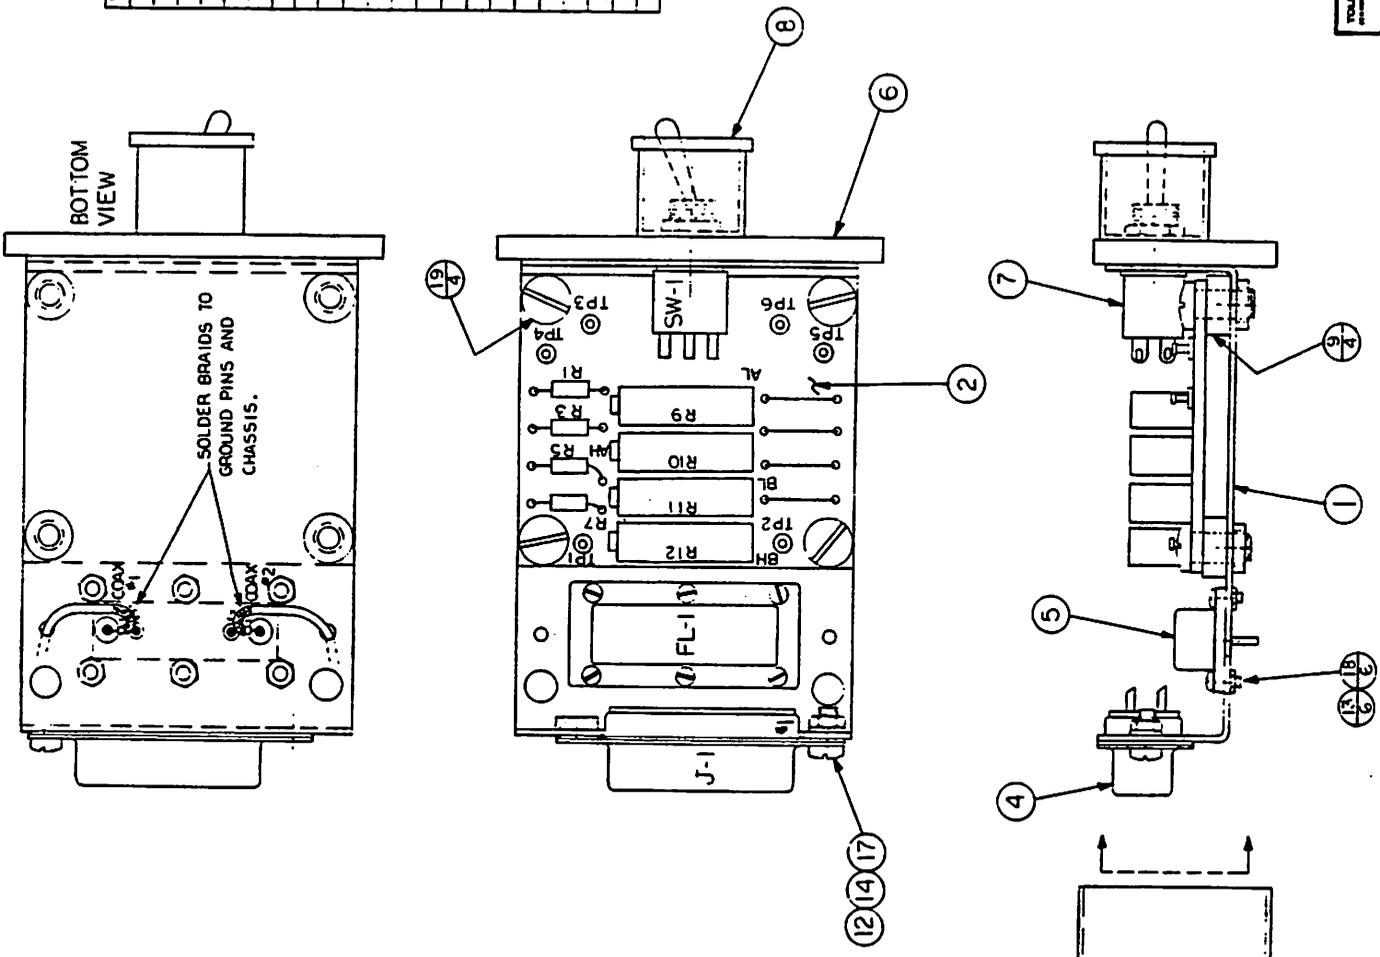


FIG. 6

SER. NO.	PART NO.	QUANTITY	DESCRIPTION
1	4099-A	1	TUNER MIC. (E.V.K. CLASS)
2	30492-A	1	FRONT PANEL
3	R12	1	RESISTOR
4	5331-A	1	15-PIN CONNECTOR
5	6051-A	1	FILTER
6	6051-A	1	TUNER PANEL
7	6051-A	1	15-PIN CONNECTOR
8	41167-A	1	SWITCH GUARD
9	13006-A	1	SPACERS
10			
11	17522-A	1	LOCK WASHER #4
12	18030-A	6	HEX NUT 1-72
14	18001-A	1	HEX NUT 1-10
15			
16	440-6-55	1	SCREW 1/4" DIA. PAN. HD.
17	440-6-4	1	SCREW 1/4" DIA. PAN. HD.
18	172-6-25	6	SCREW 1/4" DIA. PAN. HD.
19	440-6-55	4	SCREW 1/4" DIA. PAN. HD.
20			
21			
22			

MASON ENGINEERING, INC.
 1700 POST RD. FAIRFIELD, CONN.

TITLE: TMFR5-2 ASSEMBLY
 DATE: 6-28-85
 DRAWN BY: [Signature]
 CHECKED BY: [Signature]

ORIGINAL: [Signature]
 REVISIONS: [Signature]

DRAWING NUMBER: 30882-C
 ISSUE: 2

FR. 178,000-R
MASON

DATE	BY	REVISION RECORD	AUTHOR	OR	CR.
1-1-85	2	Change to match R12.	TP		

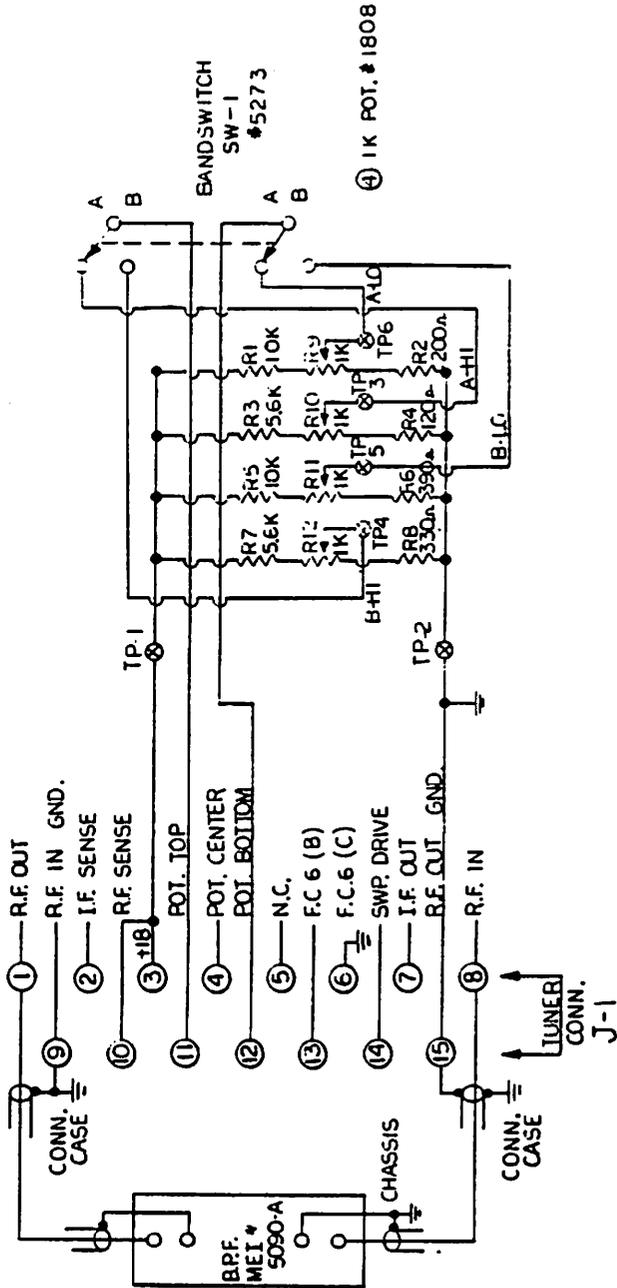


FIG. 7

SEE KEY / CONFIDENTIAL
PROPERTY OF
F. G. MASON ENGINEERING, INC.

TOLERANCES UNLESS OTHERWISE SPECIFIED	SCALE	TITLE	DRAWING NUMBER
DECIMAL	1/16"	T-3 SCHEMATIC WIRING DIAGRAM	MPR-5
FRACTIONAL	1/32"		
ANGULAR			
		DATE	ISSUE
		2-13-85	3

MASON ENGINEERING INC. 1700 POST RD FAIRFIELD, CONN.	APPROVED BY
TMPR5-3	SCALE 1/32"
	DRAWN BY


R.F. MHz	LO MHz	VCO VC		APPROX.	
		V ₁	V ₂	R ₁	R ₂
BAND A	95 / 155	210 / 270	1.25 / 1.53	44	588
BAND B	145 / 205	260 / 320	1.53 / 1.78	61	649
I.F.	115				

FL-1
FREQ. - 100/200 MHz
MFG. P/N. #SB4PP, 150/100

E.R.:

DATE	SYM	REVISION RECORD	AUTH	DR.	CK.

CTR. NO.	PART NO. #	DESCRIPTION
1	4222-A	P.C. BOARD
2	5436-A	TERMINAL PINS
3	1808-A	POT. 1K
4	10-GAR-2-2	RES. 5.6K 1/8W. 5%
5	10-TBO-2-2	RES. 10K 1/8W. 5%
6	10-OOT-2-2	RES. 330Ω 1/8W. 5%
7	10-OWT-2-2	RES. 390Ω 1/8W. 5%
8	10-TRT-2-2	RES. 120Ω 1/8W. 5%
9	10-RBT-2-2	RES. 200Ω 1/8W. 5%

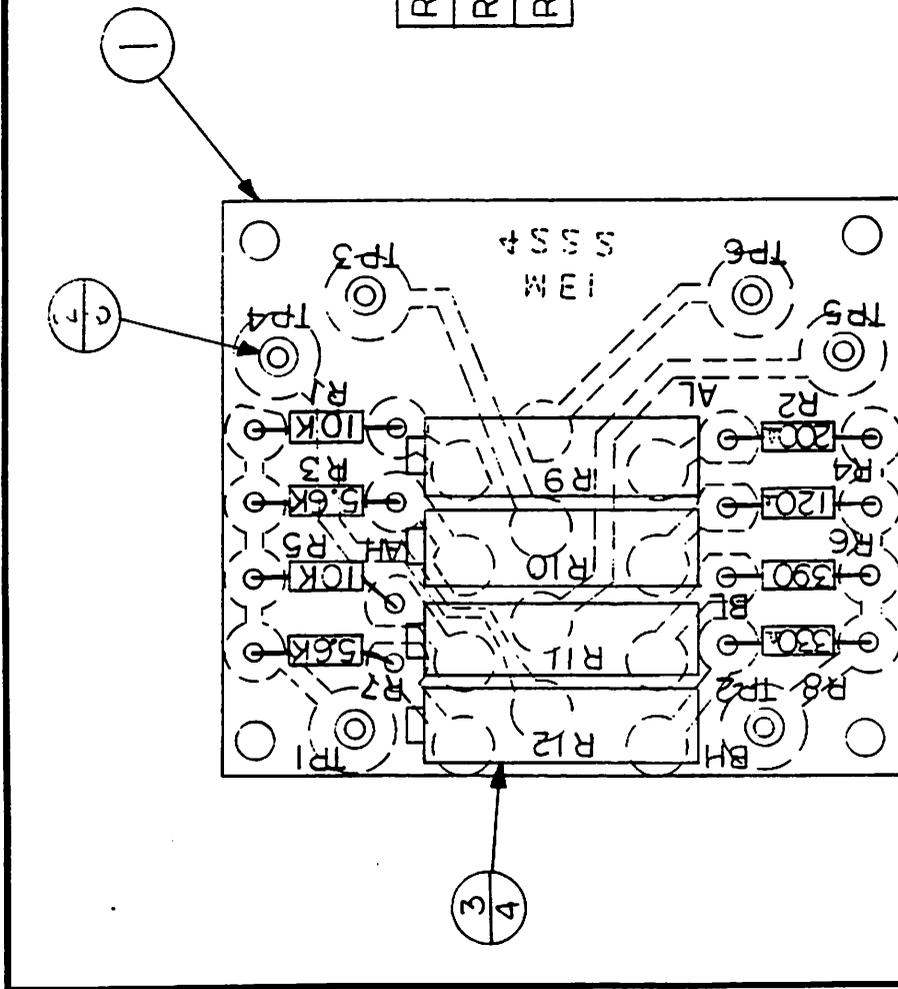


SECRET / CONFIDENTIAL
 PROPERTY OF
 F. G. MASON ENGINEERING, INC.

FIG. 8

TOLERANCES (EXCEPT AS NOTED)	© MASON ENGINEERING INC. 1700 POST RD FAIRFIELD, CONN	
DECIMAL	SCALE	DRAWN BY
±	2X	SM
FRACTIONAL	APPROVED BY	
±		
ANGULAR	TITLE	
±	T-3 P.C. BOARD ASSEMBLY MPR-5	
	DATE	ISSUE
	11-15-85	30893-A
	DRAWING NUMBER	

LOOP RESISTOR LEADS AS
 SHOWN - TYP. 8 PLACES

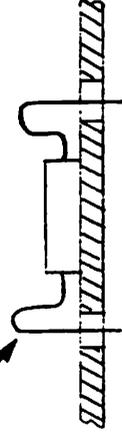

1	30883-C
	USED ON -



ER:

WIRING LIST -

FROM -	TO -	COLOR -	LENGTH
J-1 PIN #1	FL-1	COAX #1	
J-1 PIN #9	FL-1	COAX #1 - BRAID	
J-1 PIN #8	FL-1	COAX #2	
J-1 PIN #15	FL-1	COAX #2 - BRAID	
J-1 PIN #10	TP-1	RED	
J-1 PIN #3	TP-1	RED	
J-1 PIN #11	SW-1 PIN #2	BROWN	
J-1 PIN #12	SW-1 PIN #5	ORANGE	
J-1 PIN #6	SOLDER TO SHELL OF CONN. - WIRE		
SW-1 PIN #1	TP-3	YELLOW	
SW-1 PIN #3	TP-4	GREEN	
SW-1 PIN #6	TP-5	BLUE	
SW-1 PIN #4	TP-6	VIOLET	
TP-2	FL-1 COAX #1	BLACK	

BOTTOM VIEW

SOLDER BRAIDS TO GROUND PINS AND CHASSIS.

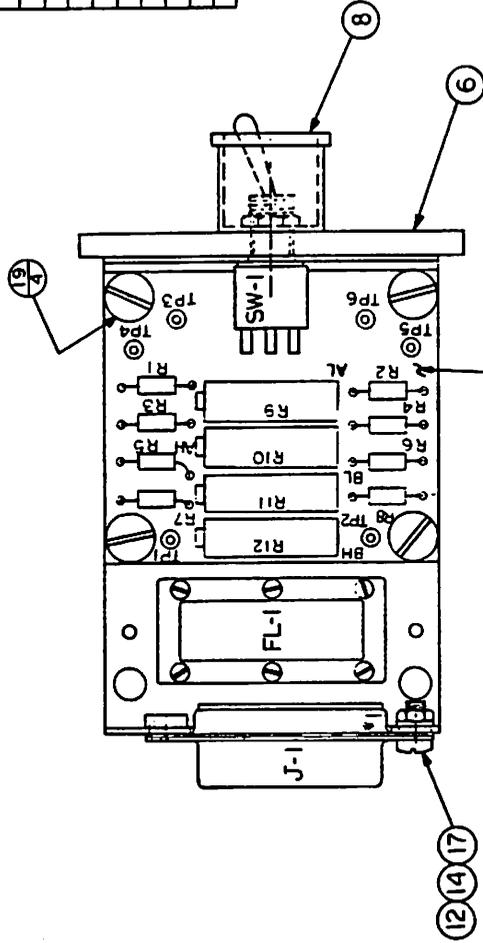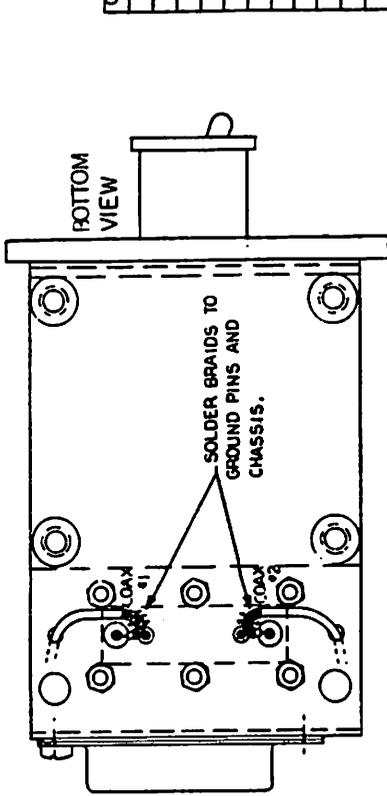

SW-1

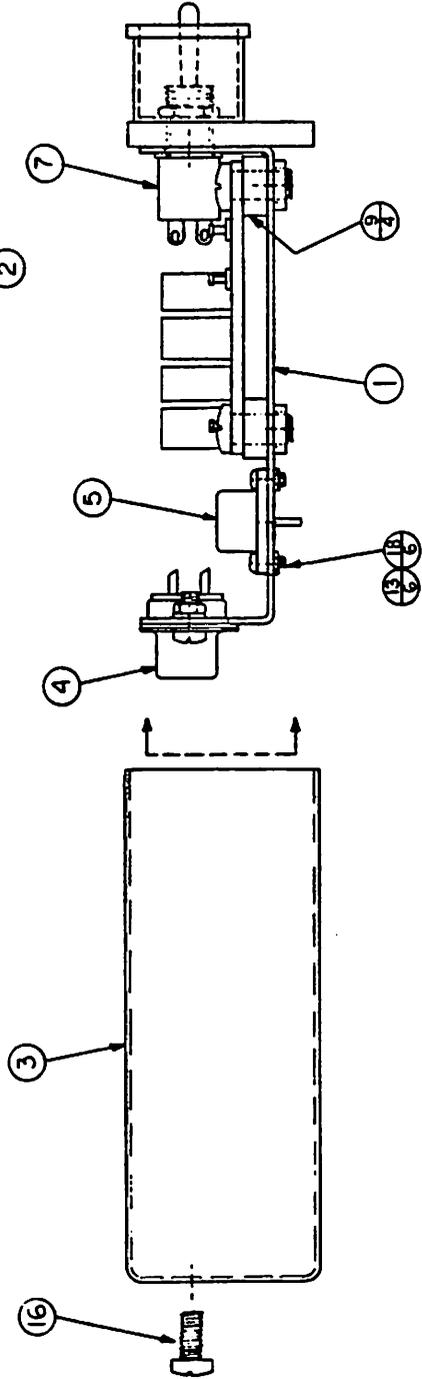



FIG. 9

DESIGNED BY
 DRAWN BY
 CHECKED BY

TOLERANCES UNLESS SPECIFIED DECIMAL FRACTIONAL	TITLE TMPR5-3 ASSEMBLY	DATE 6-28-85	PART NUMBER 30883-C	ISSUE 2
MASON ENGINEERING INC. 1700 POST RD FAIRFIELD, CONN	DRAWN BY 2X	CHECKED BY [Signature]	MASON ENGINEERING, INC. 1700 POST RD FAIRFIELD, CONN	1578,000-B USED ON -

DATE	REVISED	REVISION RECORD	AUTH	OR	CHK
12/15/85	1	Initial S.O.W. M.S.C.	TP	95	

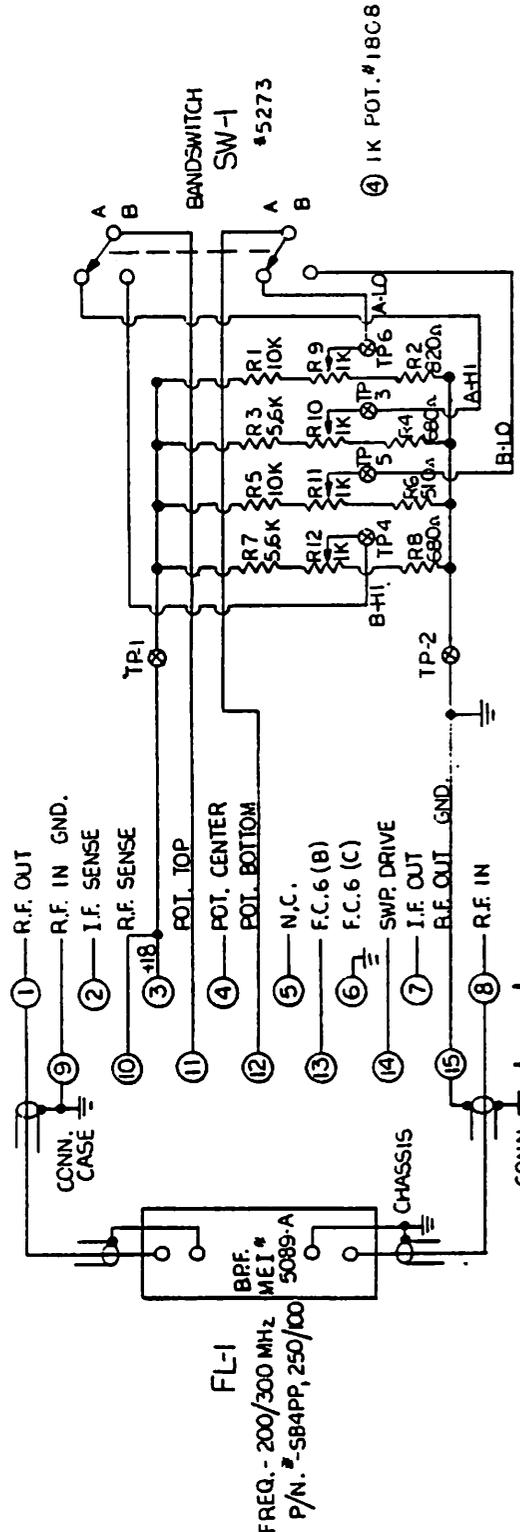


FIG. 10

NOT FOR CONFIDENTIAL
PROPERTY OF
F. G. MASON ENGINEERING, INC.

R.F. MHz	LO MHz	VCO VC		APPROX. (K)	
		V ₁	V ₂	R ₁	R ₂
BAND A	195/255	310/370	1.78/2.3	34.2/302	
BAND B	245/305	360/420	2.3 / 2.97	34.3/224	
I.F.	115				


TOLERANCES UNLESS OTHERWISE SPECIFIED	DECIMAL	1	ANGULAR	2
	FRACTIONAL	3		
© MASON ENGINEERING INC. 1700 POST RD FAIRFIELD, CONN.				
SCALE	TMPR5-4	DRAWN BY	ER	APPROVED BY
TITLE	T-4 SCHEMATIC WIRING DIAGRAM MPR-5			
DATE	2-15-85	DRAWING NUMBER	SWD-30884-B	ISSUE
				3

ER-

MADE IN U.S.A.
FEB 24 1987

DATE	SYM	REVISION RECORD	AUTH	DR.	CK.


CIR. NO.	NO. REQ.	PART NO. #	DESCRIPTION
1	1	4222-A	P.C. BOARD
2	6	5436-A	TERMINAL PINS
R9-R12	4	1808-A	POT. 1K
R-7	2	10-GAR-2-2	RES. 5.6K 1/8W. 5%
R-5	2	10-TBO-2-2	RES. 10K 1/8W. 5%
R-8	2	10-AST-2-2	RES. 680Ω 1/8W. 5%
R-6	1	10-GTT-2-2	RES. 510Ω 1/8W. 5%
R-2	1	10-SRT-2-2	RES. 820Ω 1/8W. 5%

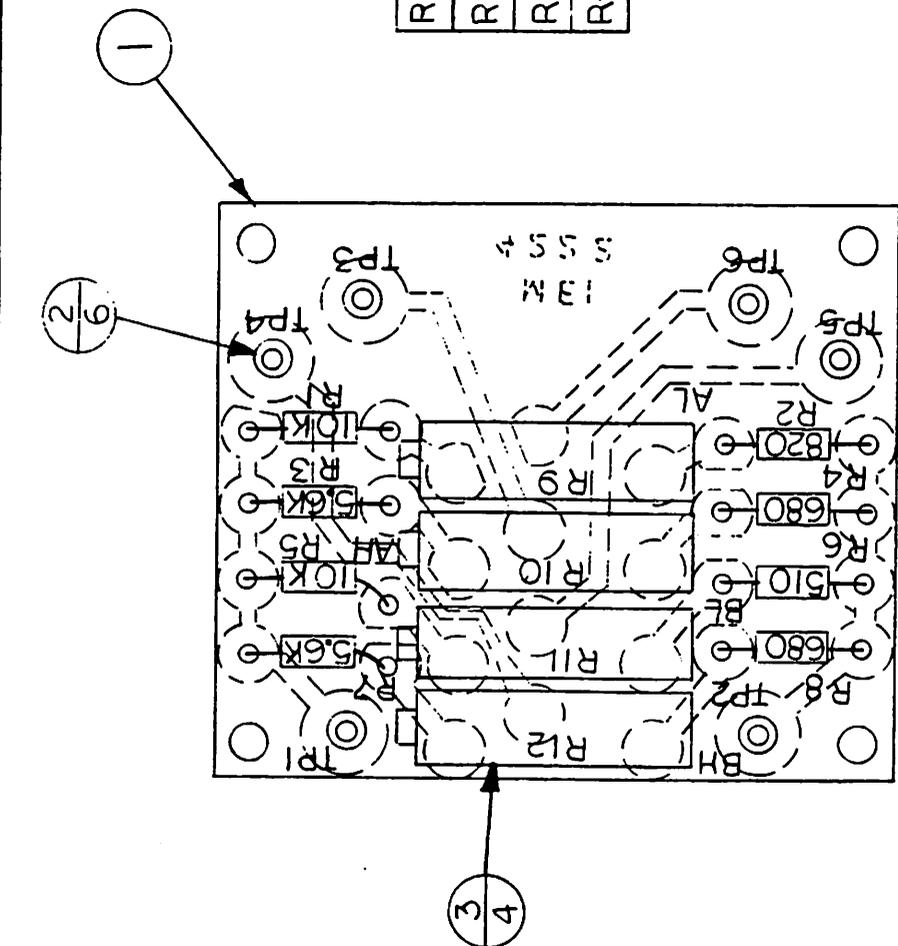

SECRET / CONFIDENTIAL
 PROPERTY OF
 F. G. MASON ENGINEERING, INC.

FIG. 11

TOLERANCES (EXCEPT AS NOTED)	© MASON ENGINEERING INC. 1700 POST RD FAIRFIELD, CONN	
DECIMAL	SCALE	DRAWN BY
± 0.2	2X	SK
FRACTIONAL	APPROVED BY	
± 0.2		
ANGULAR	TITLE	
± 0.2	T-4 P.C. BOARD ASSEMBLY MPR-5	
	DATE	DRAWING NUMBER
	11-15-85	30894-A
		ISSUE
		3

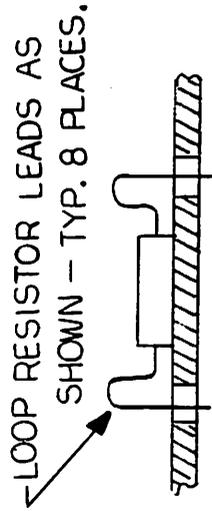



1	30884-C
	USED ON -

E.R.:

WIRING LIST -

FROM -	TO -	COLOR -	LENGTH
J-1 PIN #1	FL-1	GRAY LEAD COND.	
J-1 PIN #3	FL-1	COAX #1 - BRAID	
J-1 PIN #8	FL-1	COAX #2 - CENT. COND.	
J-1 PIN #15	FL-1	COAX #2 - BRAID	
J-1 PIN #10	TP-1	RED	
J-1 PIN #3	TP-1	RED	
J-1 PIN #11	SW-1 PIN #2	BROWN	
J-1 PIN #12	SW-1 PIN #5	ORANGE	
J-1 PIN #6	SOLDER TO SHELL OF CONN. -	BY WIRE	
SW-1 PIN #1	TP-3	YELLOW	
SW-1 PIN #3	TP-4	GREEN	
SW-1 PIN #6	TP-5	BLUE	
SW-1 PIN #4	TP-6	VIOLET	
TP-2	FL-1 BRAID	COAX #1	BLACK

BOTTOM VIEW

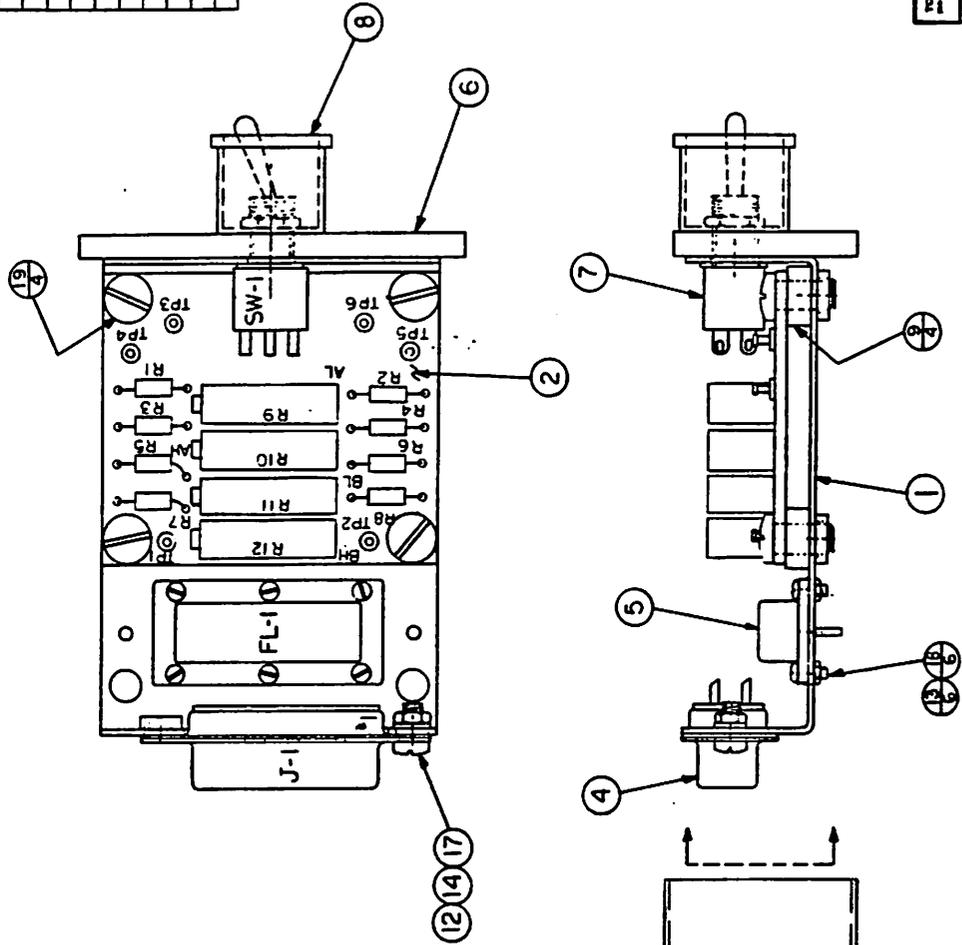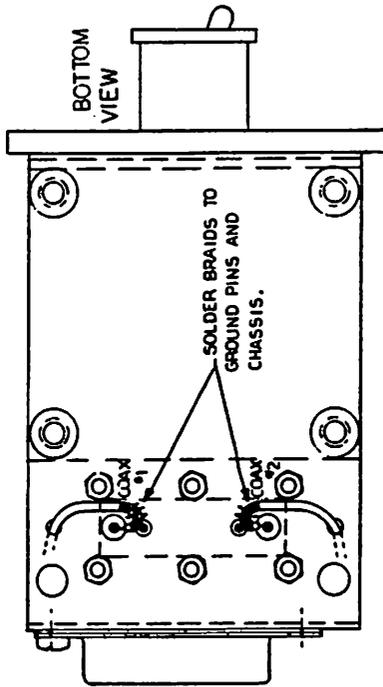

SW-1




FIG. 12

MASON ENGINEERING INC.
 1700 POST RD FAIRFIELD, CONN.
 TITLE: TMPR5-4 ASSEMBLY
 DATE: 6-28-85
 DRAWN BY: [Signature]
 CHECKED BY: [Signature]
 APPROVED BY: [Signature]

1178,000-B
 USED ON -
 [ER-]

ISSUE	2
REVISION NUMBER	30884-C
TITLE	ASSEMBLY
SCALE	2X

DATE	REVISED	REVISION RECORD	AUTHOR	CHK
11/1/85	1	Original	TP	SH

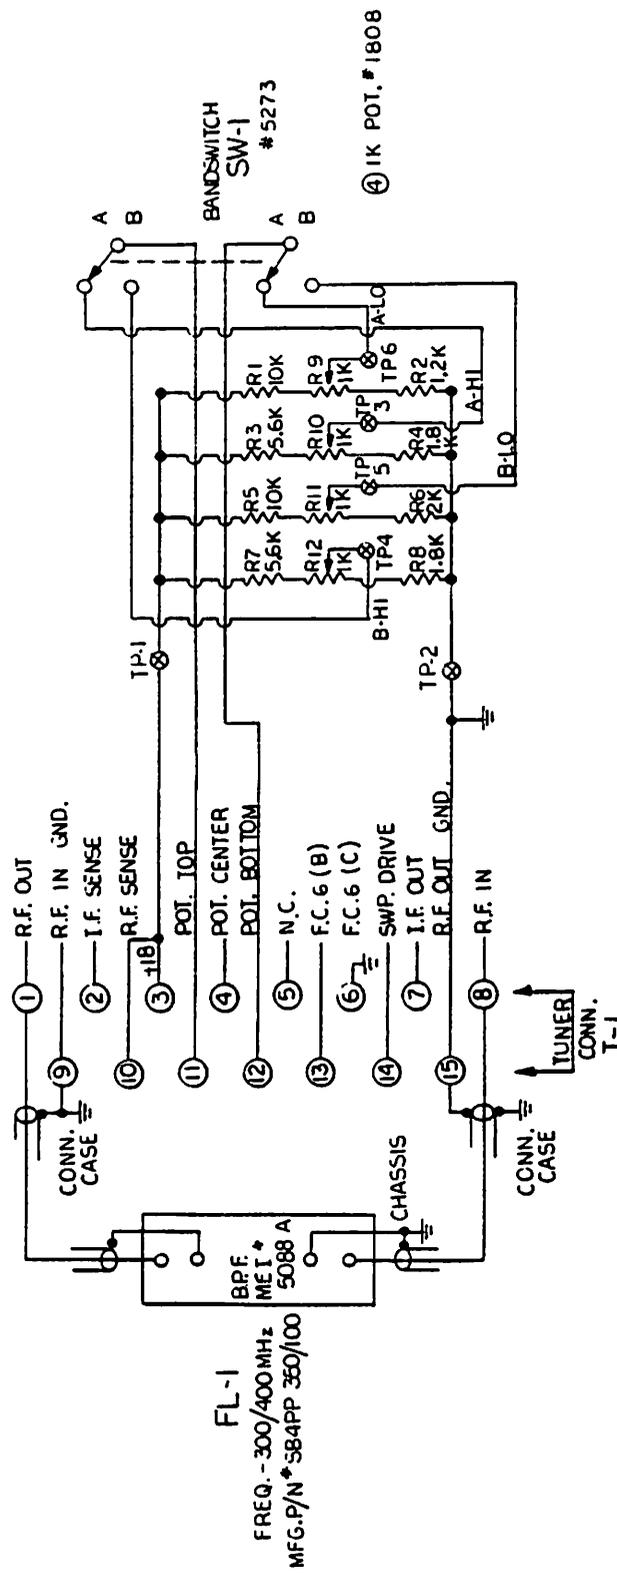


FIG. 13

SECRET/CONFIDENTIAL
PROPERTY OF
F. G. MASON ENGINEERING, INC.

TOLERANCES UNLESS OTHERWISE SPECIFIED	DECIMAL	SCALE	DRAWN BY	APPROVED BY
	1	1/8"	TP	SH
	2	FRACTIONAL		
	3	ANGULAR		
TITLE		DRAWING NUMBER		
T-5 SCHEMATIC WIRING DIAGRAM MPR-5		SWD-30885-B		
DATE		ISSUE		
2-15-85		3		
© MASON ENGINEERING INC. 1700 POST RD FAIRFIELD, CONN.				


BAND	R.F. MHz	LO MHz	VCO VC		R ₁ R ₂	
			V ₁	V ₂	43.7 / 211	32 / 116
BAND A	290 / 355	410 / 470	2.97 / 3.65			
BAND B	345 / 405	460 / 520	3.65 / 4.79			
I.F.	115					

APPROX. (K)

E.R.-

DATE	SYM	REVISION RECORD	AUTH.	DR.	CK.

CIR. NO. NO. REQ.	PART NO. *	DESCRIPTION
1	4222-A	P.C. BOARD
2	5436-A	TERMINAL PINS
3	1808-A	POT. 1K
4	10-GAR-2-2	RES. 5.6K 1/8W. 5%
5	10-TBO-2-2	RES. 10K 1/8W. 5%
6	10-TSR-2-2	RES. 1.8K 1/8W. 5%
7	10-RBR-2-2	RES. 2K 1/8W. 5%
8	10-TRR-2-2	RES. 1.2K 1/8W. 5%

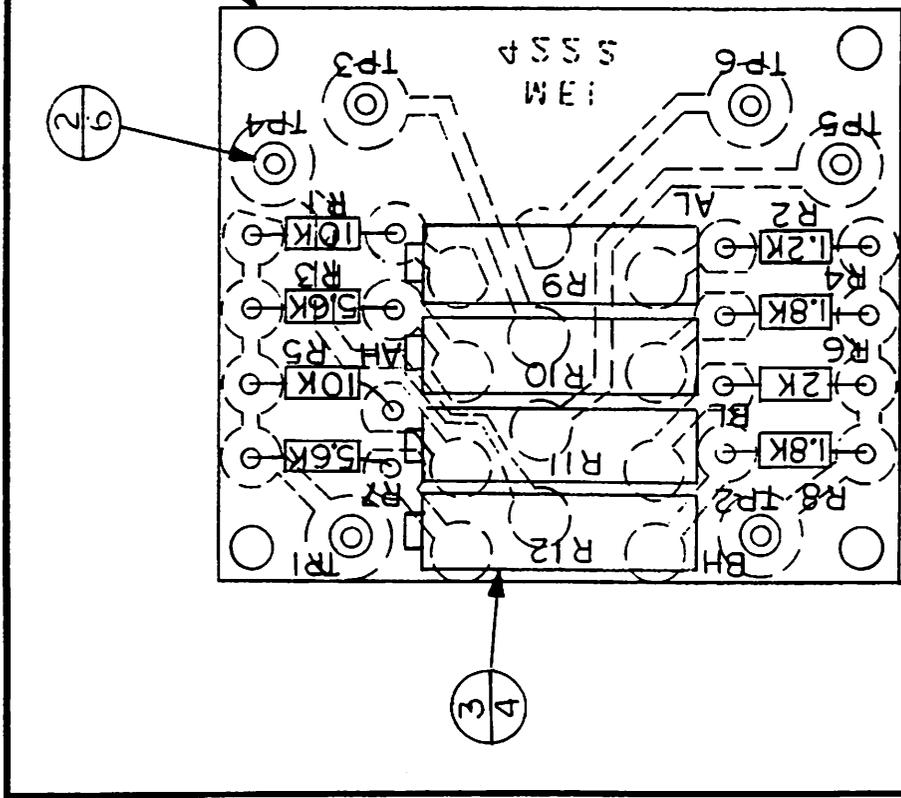

← LOOP RESISTOR LEADS AS SHOWN - TYP. 8 PLACES

FIG. 14

SECRET / CONFIDENTIAL
PROPERTY OF
F. G. MASON ENGINEERING, INC.

TOLERANCES (EXCEPT AS NOTED)	DECIMAL	FRACTIONAL	ANGULAR
	±	±	±
	~	~	~
© MASON ENGINEERING INC. 1700 POST RD. FAIRFIELD, CONN			
SCALE	DRAWN BY	APPROVED BY	
2X	SPK		
TITLE			
T-5 P.C. BOARD ASSEMBLY MPR-5			
DATE	DRAWING NUMBER	ISSUE	
11-25-85	30895-A	3	

130885-C
USED ON -
E.R.-

WIRING LIST -

FROM -	TO -	COLOR -	LENGTH
J-1 PIN *1	FL-1	TOOK 1-1/2' COAX.	
J-1 PIN *9	FL-1	COAX *1 - BRAID	
J-1 PIN *8	FL-1	COAX *1 - Braid	
J-1 PIN *15	FL-1	COAX *2 - Braid	
J-1 PIN *10	TP-1	RED	
J-1 PIN *3	TP-1	RED	
J-1 PIN *11	SW-1 PIN *2	BROWN	
J-1 PIN *12	SW-1 PIN *5	ORANGE	
J-1 PIN *6	SOLDER TO SHELL OF COAX. - Braid		
SW-1 PIII *1	TP-3	YELLOW	
SW-1 PIN *3	TP-4	GREEN	
SW-1 PIN *6	TP-5	BLUE	
SW-1 PIN *4	TP-6	VIOLET	
TP-2	FL-1 Braid OF COAX *1	BLACK	

BOTTOM VIEW


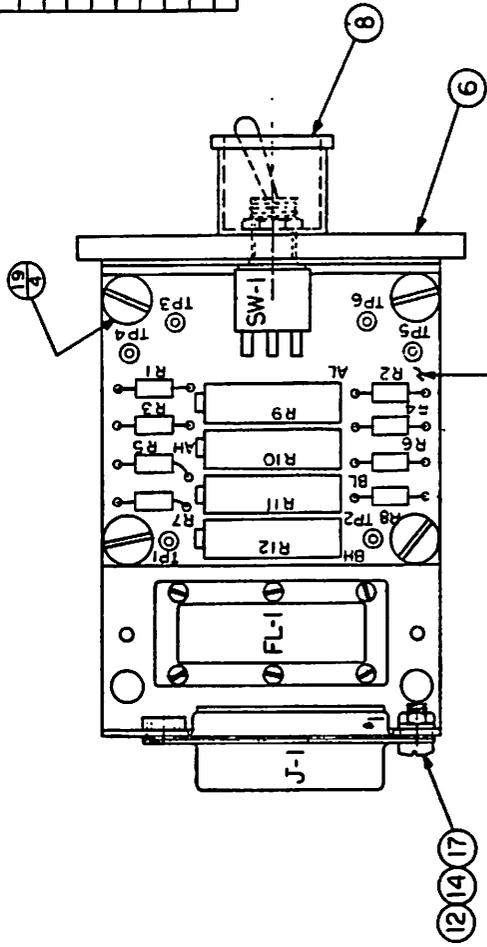
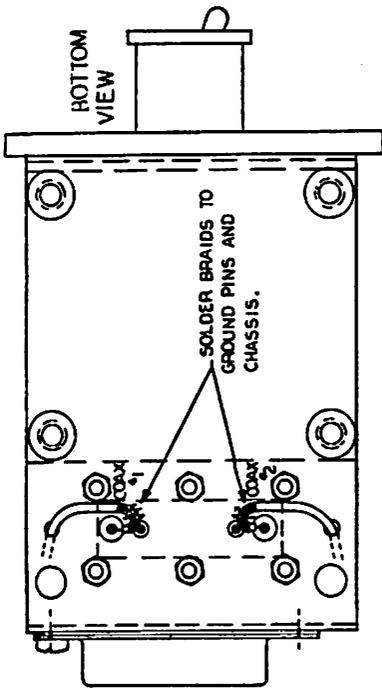


FIG. 15

ALL INFORMATION CONTAINED HEREIN IS UNCLASSIFIED
DATE 5-28-85 BY 30885-C

TECHNICAL DRAWING NUMBER	REVISION	DATE	ISSUE
	2X	5-28-85	2

DESIGNED BY	CHECKED BY	APPROVED BY

TITLE	DATE	ISSUE
ASSEMBLY	5-28-85	2

DATE	BY
11-78-000-B	USED ON -

DATE	BY
11-78-000-B	USED ON -

DATE	REV.	REVISION RECORD	AUTH.	DR.	CHK.
12-1-85	1	Change to match PWD	TP	PH	

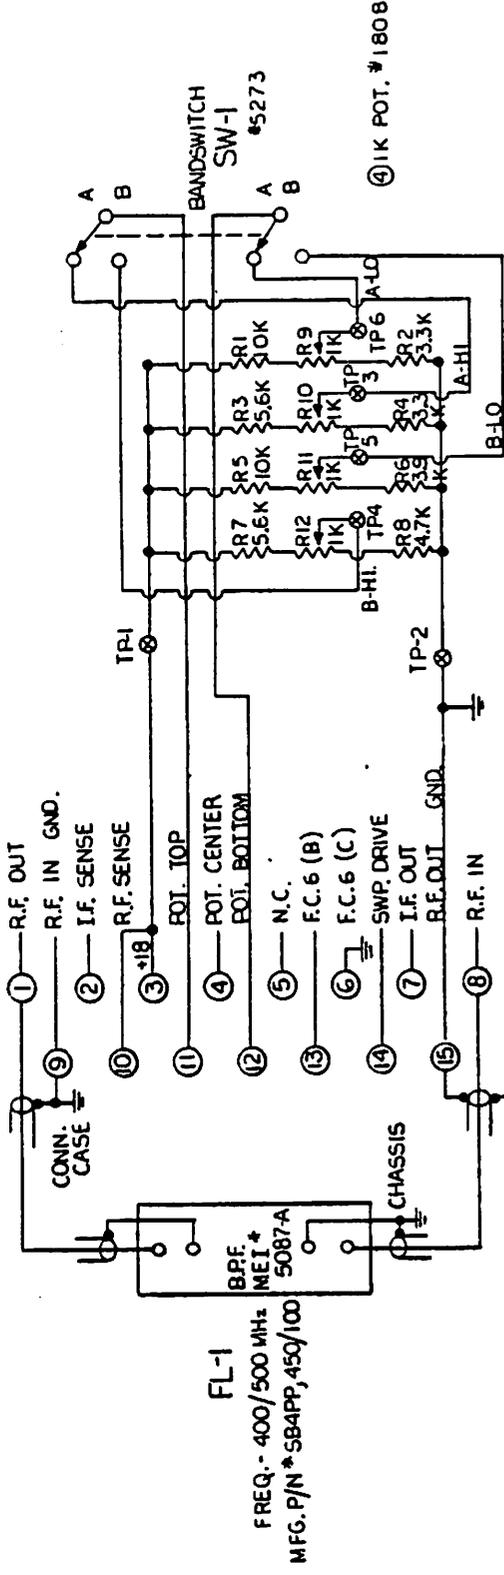


FIG. 16

SECRET / CONFIDENTIAL
PROPERTY OF
F. G. MASON ENGINEERING, INC.

BAND	R.F. MHz	LO MHz	VCO VC (K)		
			V ₁	V ₂	R ₁ R ₂
BAND A	395/455	510/570	4.79 / 5.9	43.2 / 109	
BAND B	445/505	560/620	5.9 / 7.03	52.2 / 97	
I.F.	115				



TOLERANCES UNLESS OTHERWISE SPECIFIED	SCALE	DRAWN BY	APPROVED BY
DECIMAL	1/16"	JK	
FRACTIONAL			
ANGULAR			

MASON ENGINEERING INC. 1700 POST RD. FAIRFIELD, CONN.	
TMPR5-6	
TITLE T-6 SCHEMATIC WIRING DIAGRAM, MPR5	
DATE 2-15-85	DRAWING NUMBER SWD-30886-B
	ISSUE 3

E.R.

DATE	SYM	REVISION RECORD	AUTH.	DR.	CK.

CIR. NO. NO. REQ.	PART NO. #	DESCRIPTION
1	4222-A	P.C. BOARD
2	5436-A	TERMINAL PINS
3	1808-A	POT. 1K
4	10-GAR-2-2	RES. 5.6K 1/8W. 5%
5	10-TBO-2-2	RES. 10K 1/8W. 5%
6	10-OOR-2-2	RES. 3.3K 1/8W. 5%
7	10-OWR-2-2	RES. 3.9K 1/8W. 5%
8	10-YVR-2-2	RES. 4.7K 1/8W. 5%

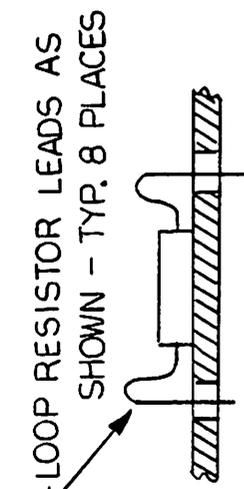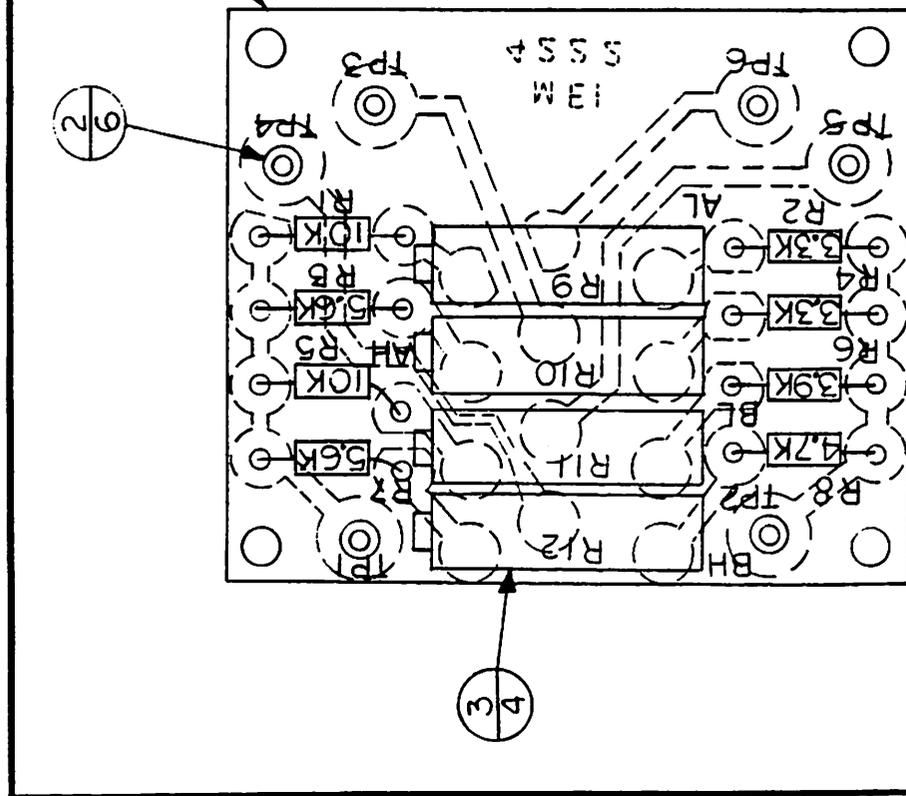

← LOOP RESISTOR LEADS AS SHOWN - TYP. 8 PLACES

FIG. 17

SECRET / CONFIDENTIAL
PROPERTY OF
E. G. MASON ENGINEERING, INC.

TOLERANCES (EXCEPT AS NOTED)	© MASON ENGINEERING INC. 1700 POST RD FAIRFIELD, D. CONN.	
DECIMAL	SCALE	DRAWN BY
±	2X	SK
FRACTIONAL	APPROVED BY	
±		
ANGULAR	TITLE	
±	T-6 P.C. BOARD ASSEMBLY MPR-5	
	DATE	DRAWING NUMBER
	11-25-85	30896-A
		ISSUE
		3

	1	30886-C
ER:	USED ON -	

WIRING LIST -

FROM -	TO -	COLOR -	LENGTH
J-1 PIN *1	FL-1	GRAY CENT. COND.	
J-1 PIN *2	FL-1	GRAY BRAD	
J-1 PIN *8	FL-1	GRAY CENT. COND.	
J-1 PIN *15	FL-1	GRAY 2- BRAD	
J-1 PIN *10	TP-1	RED	
J-1 PIN *3	TP-1	RED	
J-1 PIN *11	SW-1 PIN *2	BROWN	
J-1 PIN *12	SW-1 PIN *5	ORANGE	
J-1 PIN *6	SOLDER TO SHELL OF CONN. -	WIRE	
SW-1 PIN *1	TP-3	YELLOW	
SW-1 PIN *3	TP-4	GREEN	
SW-1 PIN *6	TP-5	BLUE	
SW-1 PIN *4	TP-6	VIOLET	
TP-2	FL-1 BRAD TP-1	BLACK	

BOTTOM VIEW


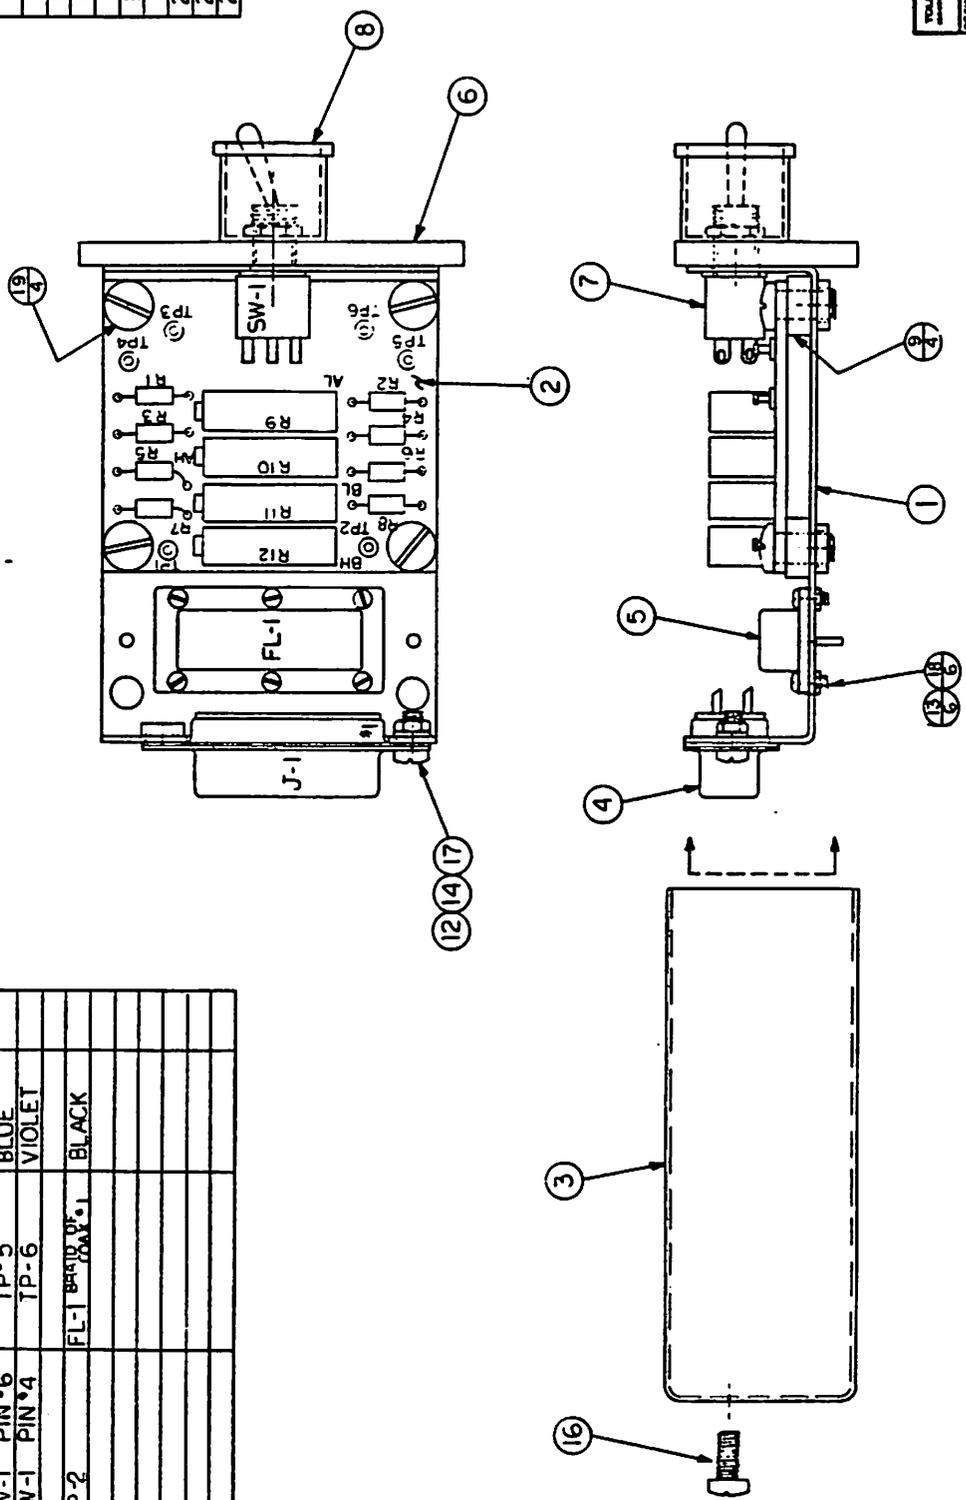
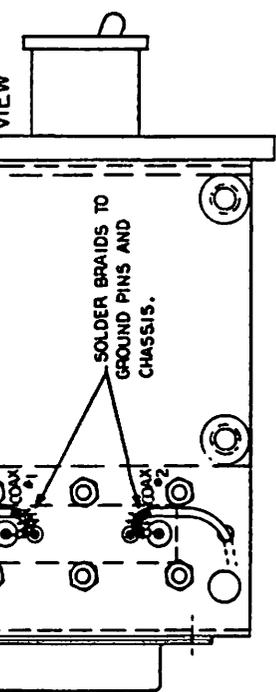


FIG. 18

CHR. NO.	REV.	PART NO. #	PART DESCRIPTION
1	1	30899-A	TUNER MTG. BRACKET ASST
2	1	30896-A	P.C. BOARD ASSEMBLY
3	1	R19200-B	TUNER CASE, REWORKED
4	1	5734-A	15-PIN CONNECTOR
5	1	5057-A	FILTER
6	1	6058-A	TUNER PANEL
7	1	5273-A	TOGGLE SWITCH
8	1	24487-A	SWITCH GUARD
9	4	13006-A	SPACERS
10			
11			
12	1	17522-A	LOCK-WASHER *4
13	6	18030-A	HEX NUT 1-72
14	1	18001-A	HEX NUT 4-40
15			
16	1	440-6-6-SS	SCREW, 440X 1/4 PAN HD.
17	1	440-6-4-SS	SCREW, 440X 3/16 FILLISTER
18	6	172-6-2-SS	SCREW, 172X 3/16 BD. HD.
19	4	440-10-6-SS	SCREW, 440X 5/16 PAN HD.
20			
21			
22			

MASON ENGINEERING INC.
 1700 POST RD FAIRFIELD, CONN.
 © MASON ENGINEERING INC.
 1700 POST RD FAIRFIELD, CONN.
 TITLE: TMPR5-6 ASSEMBLY
 DATE: 11-28-80
 DRAWING NUMBER: 30896-C
 ISSUE: 2
 SCALE: 2X
 APPROVED BY: [Signature]
 DESIGNED BY: [Signature]

DATE	REV	REVISION RECORD	AUTH	OR	CR
2-19-85	3	Change to match PWD	TP		87

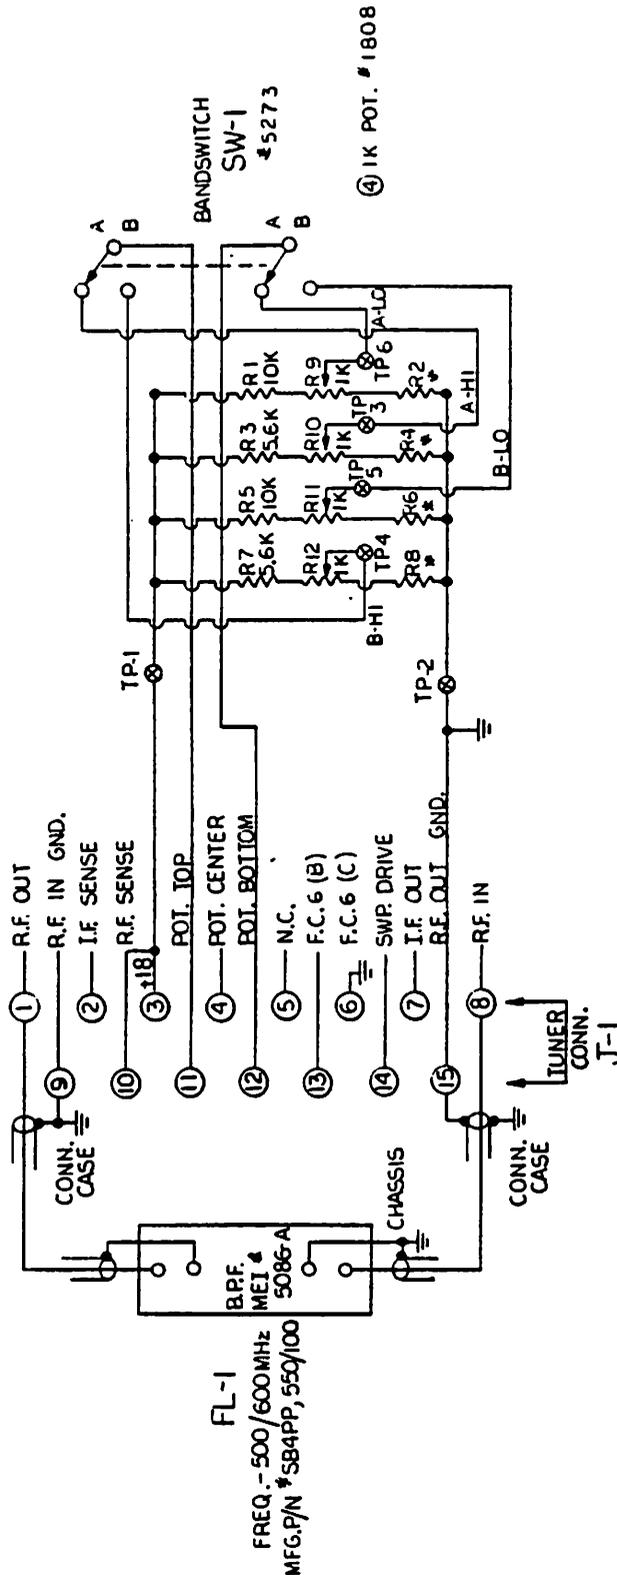


FIG. 19

SECRET / CONFIDENTIAL
 PROPERTY OF
 F. G. MASON ENGINEERING, INC.

TOLERANCES UNLESS OTHERWISE SPECIFIED	SCALE	DRAWN BY	APPROVED BY
DECIMAL	1/16"	TM	SM
FRACTIONAL			
ANGULAR			
TITLE	MASON ENGINEERING INC. 1700 POST RD FAIRFIELD, CONN.		
DATE	2-19-85	DRAWING NUMBER	SWD-30887-B
ISSUE			3

R.F. MHz	L.O. MHz	VCO VC		APPROX. VC (K)	
		V ₁	V ₂	R ₁	R ₂
BAND A 495/555	610/670	7.03	7.90	81	116
BAND B 545/605	660/720	7.9	9.94	76	87
I.F.	115				


E.R.

MADE IN U.S.A.
 FEB 24 1987

DATE	SYM	REVISION RECORD	AUTH.	DR.	CK.

CIR. NO.	NO. REQ.	PART NO. *	DESCRIPTION
1	1	4222-A	P.C. BOARD
2	6	5436-A	TERMINAL PINS
R9-R12	3	1808-A	POT. 1K
R-7 R-3	4	10-GAR-2-2	RES. 5.6K 1/8W. 5%
R-5 R-1	5	10-TBO-2-2	RES. 10K 1/8W. 5%
R-4 R-2 *	6	10-OWR-2-2	RES. 3.9K 1/8W. 5%
R-8 R-6 *	7	10-GTR-2-2	RES. 5.1K 1/8W. 5%

* - FACTORY SELECT

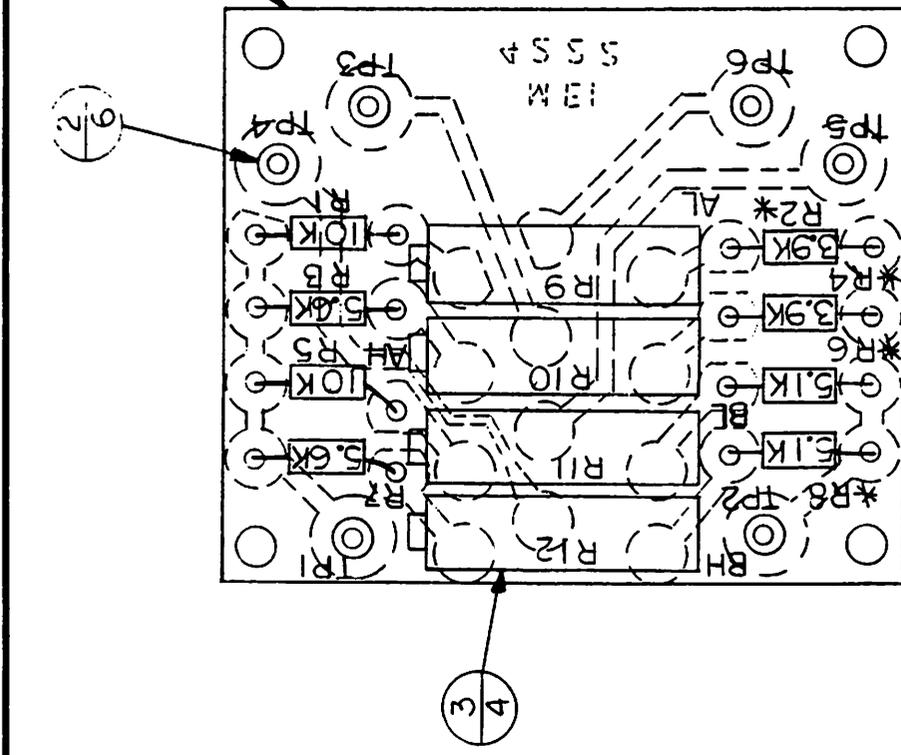


SECRET / CONFIDENTIAL
PROPERTY OF
F. G. MASON ENGINEERING, INC.

FIG. 20

TOLERANCES (EXCEPT AS NOTED)	© MASON ENGINEERING INC. 1700 POST RD FAIRFIELD, CONN.	
DECIMAL	SCALE	DRAWN BY
± $\sqrt{2}$	2X	SK
FRACTIONAL	APPROVED BY	
± $\sqrt{2}$		
ANGULAR	TITLE	
± $\sqrt{2}$	T-7 P.C. BOARD ASSEMBLY MPR-5	
	DATE	ISSUE
	11-26-85	30897-A 4

- LOOP RESISTOR LEADS AS SHOWN - TYP. 8 PLACES

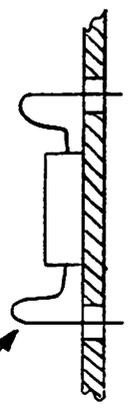

1	30887-C
USED ON -	

E.R.:

WIRING LIST -

FROM -	TO -	COLOR -	LENGTH
J-1 PIN *1	FL-1	COAX. COND.	
J-1 PIN *9	FL-1	COAX *1 BRAID	
J-1 PIN *8	FL-1	COAX *2 BRAID	
J-1 PIN *15	FL-1	COAX *2 COND.	
J-1 PIN *10	TP-1	RED	
J-1 PIN *3	TP-1	RED	
J-1 PIN *11	SW-1 PIN *2	BROWN	
J-1 PIN *12	SW-1 PIN *5	ORANGE	
J-1 PIN *6	SOLDER TO SHELL OF CONN. -	WIRE	
SW-1 PIN *1	TP-3	YELLOW	
SW-1 PIN *3	TP-4	GREEN	
SW-1 PIN *6	TP-5	BLUE	
SW-1 PIN *4	TP-6	VIOLET	
TP-2	FL-1 BRACKET ASSY	BLACK	

BOTTOM VIEW

QTY. REQ.	PART NO. #	PART DESCRIPTION
1	30899-A	TUNER MTG. BRACKET ASSY
2	30897-A	P.C. BOARD ASSEMBLY
3	R19200-B	TUNER CASE REWORKED
4	5734-A	15-PIN CONNECTOR
5	5035-A	FILTER
6	6079-A	TUNER PANEL
7	5273-A	TOGGLE SWITCH
8	24487-A	SWITCH GUARD
9	13006-A	SPACERS
10		
11		
12	17522-A	LOCK-WASHER *4
13	18030-A	HEX NUT 1-72
14	18001-A	HEX NUT 4-40
15		
16	440-8-6-SS	SCREW, 440X1/4 PAN HD.
17	440-6-4-SS	SCREW, 440X3/16 FILLISTER
18	172-6-2-SS	SCREW, 172 X 3/16 BD. HD.
19	440-10-6-SS	SCREW, 440X5/16 PAN HD.
20		
21		
22		

SOLDER BRAIDS TO GROUND PINS AND CHASSIS.

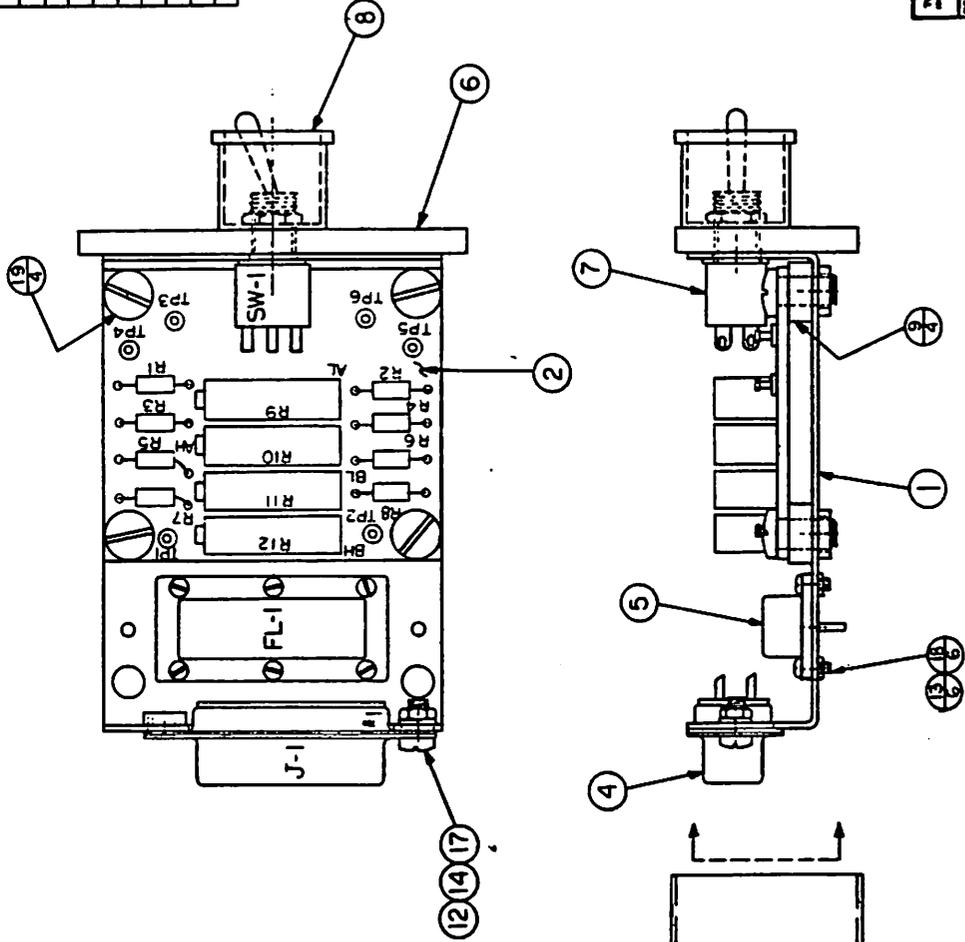


FIG. 21

31L AT / CONFIDENTIAL
PRO 1Y UN
F. G. MASON ENGINEERING, INC.

APPROVED BY	DATE	ISSUE
REVISION	SCALE	2X
FUNCTIONAL	TITLE	TMPR5-7 ASSEMBLY
DATE	DESIGN NUMBER	30897-C
DATE	ISSUE	155
DATE	ISSUE	2

DESIGNED BY	DATE	ISSUE
REVISION	SCALE	2X
FUNCTIONAL	TITLE	TMPR5-7 ASSEMBLY
DATE	DESIGN NUMBER	30897-C
DATE	ISSUE	155
DATE	ISSUE	2

DATE	REVISED	REVISION RECORD	AUTH	DR.	CR.
2-1-85	1	Change to MPR-5	TP	ER	

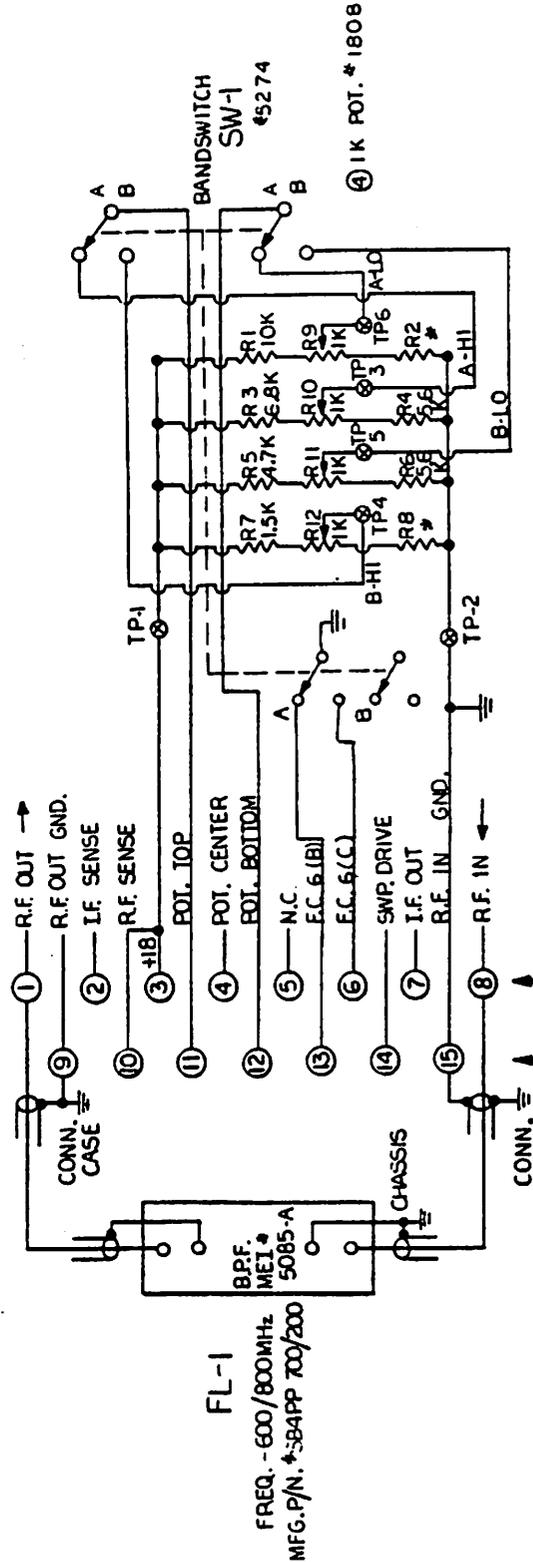



FIG. 22

SECRET / CONFIDENTIAL
PROPERTY OF
F. G. MASON ENGINEERING, INC.

BAND	R.F. MHz	L.O. MHz	VCO VC		K
			V ₁	V ₂	
BAND A	595/705	480/590	4.24	6.49	18.8/51
BAND B	695/805	810/920	11.45	17	20.4/1.68
I.F.	115				

TOLERANCES UNLESS OTHERWISE SPECIFIED AS NOTED	DECIMAL	FRACTIONAL	ANGULAR
SCALE	APPROVED BY	TITLE	DATE
2	TP	T8 SCHEMATIC WIRING DIAGRAM MPR-5	2-19-85
3	ER	DRAWING NUMBER	ISSUE
4		SWD-30888 - B	3

ER-

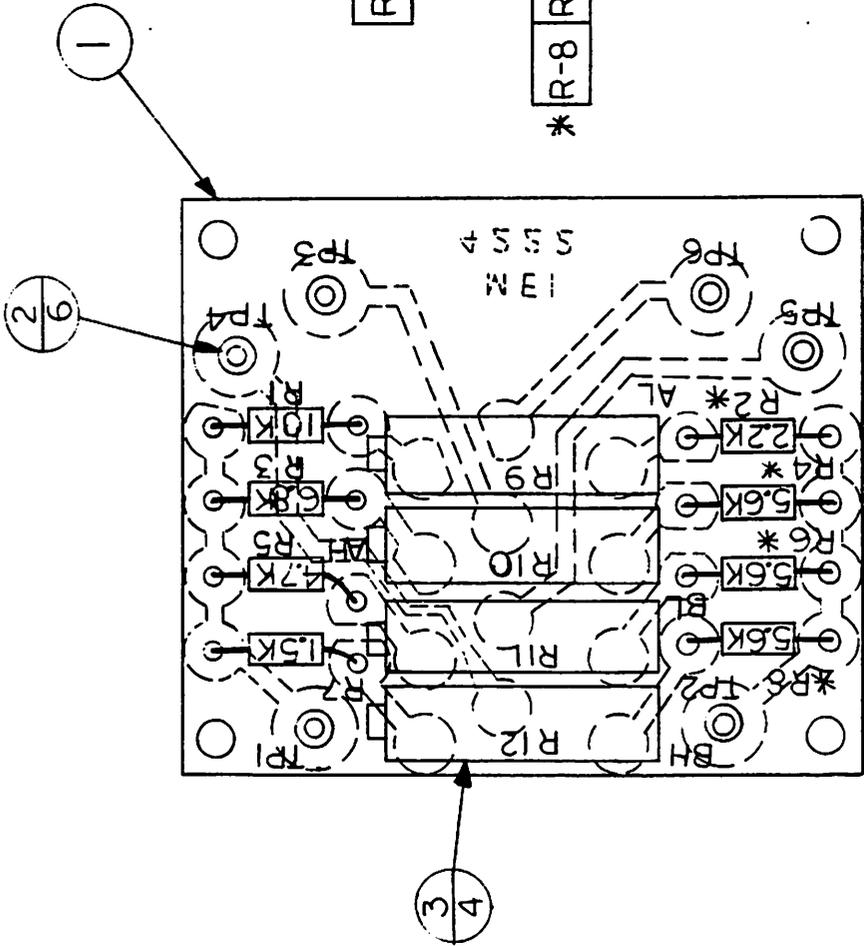


* - FACTORY SELECTED.

FIG. 23

SECRET / CONFIDENTIAL
 PROPERTY OF
 J. G. MASON ENGINEERING, INC.

TOLERANCES (EXCEPT AS NOTED)	DECIMAL	FRACTIONAL	ANGULAR	TITLE	DATE	DRAWING NUMBER	ISSUE
	±	±	±	T-8 P.C. BOARD ASSEMBLY MPR-5	12-2-85	30936-A	1
				© MASON ENGINEERING, INC.			
				1700 POST RD. PHOENIX, ARIZONA 85016			
SCALE		DRAWN BY		APPROVED BY			
2 X		[Signature]		[Signature]			

LOOP RESISTOR LEADS AS
 SHOWN - TYP. 8 PLACES

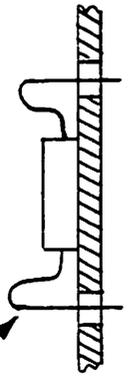

DATE	SYM	REVISION RECORD	AUTH.	DR.	CK.

CIR. NO.	NO. REQ.	PART NO. #	DESCRIPTION
1	1	4222-A	P.C. BOARD
2	6	5436-A	TERMINAL PINS
3	4	1808-A	POT. 1K
R-1	4	10-TBO-2-2	RES. 10K 1/8W. 5%
*R-2	5	10-RRR-2-2	RES. 2.2K 1/8W. 5%
*R-8	R-6	10-GAR-2-2	RES. 5.6K 1/8W. 5%
R-3	7	10-ASR-2-2	RES. 6.8K 1/8W. 5%
R-5	8	10-YVR-2-2	RES. 4.7K 1/8W. 5%
R-7	9	10-TGR-2-2	RES. 1.5K 1/8W. 5%



1 30888-C
 USED ON -

WIRING LIST -

FROM -	TO -	COLOR -	LENGTH
J-1 PIN *1	FL-1	COAXIAL COND.	
J-1 PIN *9	FL-1	COAXIAL BRAD	
J-1 PIN *8	FL-1	COAXIAL COND.	
J-1 PIN *15	FL-1	COAXIAL BRAD	
J-1 PIN *10	TP-1	RED	
J-1 PIN *3	TP-1	RED	
J-1 PIN *11	SW-1 PIN *2	BROWN	
J-1 PIN *12	SW-1 PIN *5	ORANGE	
J-1 PIN *13	SW-1 PIN *7	WHITE	
J-1 PIN *6	SW-1 PIN *9	GRAY	
SW-1 PIN *1	TP-3	YELLOW	
SW-1 PIN *3	TP-4	GREEN	
SW-1 PIN *6	TP-5	BLUE	
SW-1 PIN *4	TP-6	VIOLET	
TP-2	SW-1 PIN *8	BLACK	
TP-2	FL-1 BRAD	BLACK	

BOTTOM VIEW

SOLDER BRAIDS TO GROUND PINS AND CHASSIS.

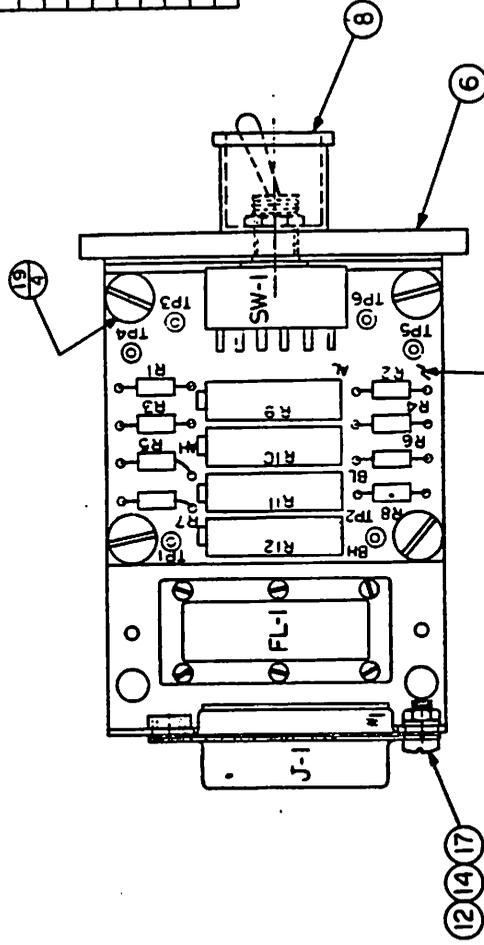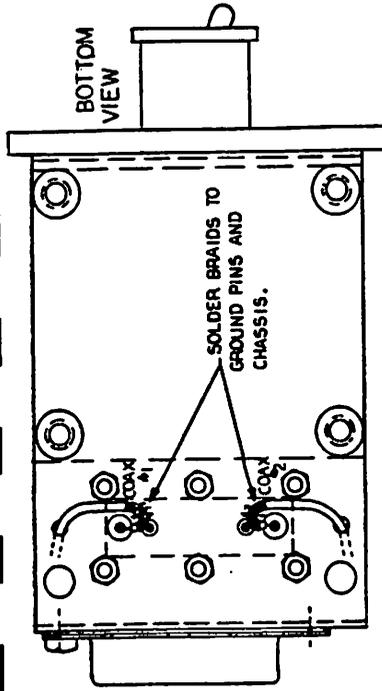

SW-1

171	172
173	174
175	176
177	178
179	180

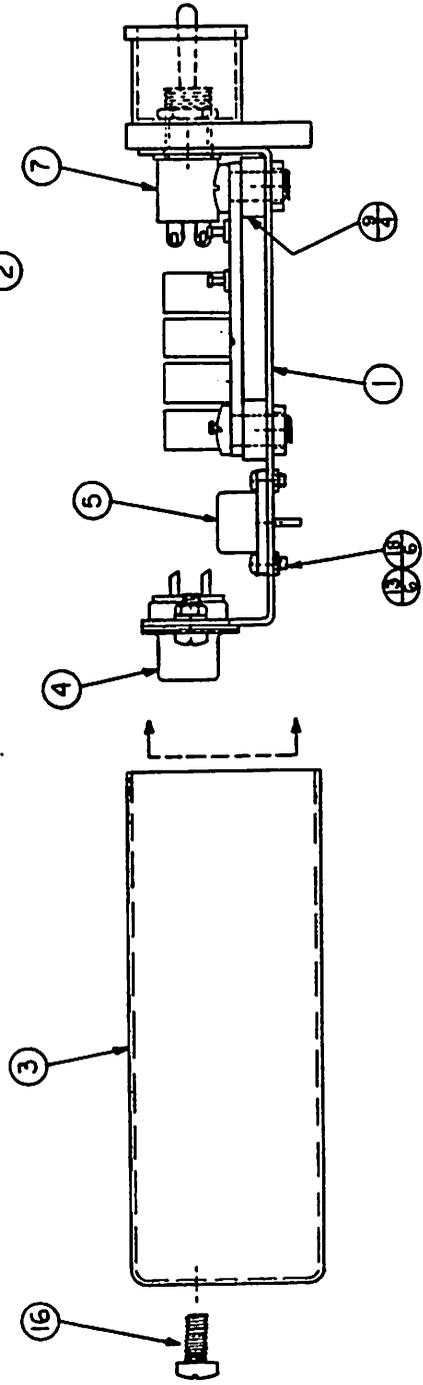


FIG. 24

311... FFG INFERENTIAL
 PRO... ILY OF
 F G MANN ENGINEERING, INC.

MASON ENGINEERING, INC. 1700 POST RD. FAIRFIELD, CONN.	
DATE	6-28-85
ISSUE	2
ASSEMBLY	30888-C
TM/PR5 - 8	

178,000-B
 USED ON -

[E.R.]

DATE	REVISION RECORD	AUTH	DR	CHK
2-19-85	1. Initial Schematic	MM		

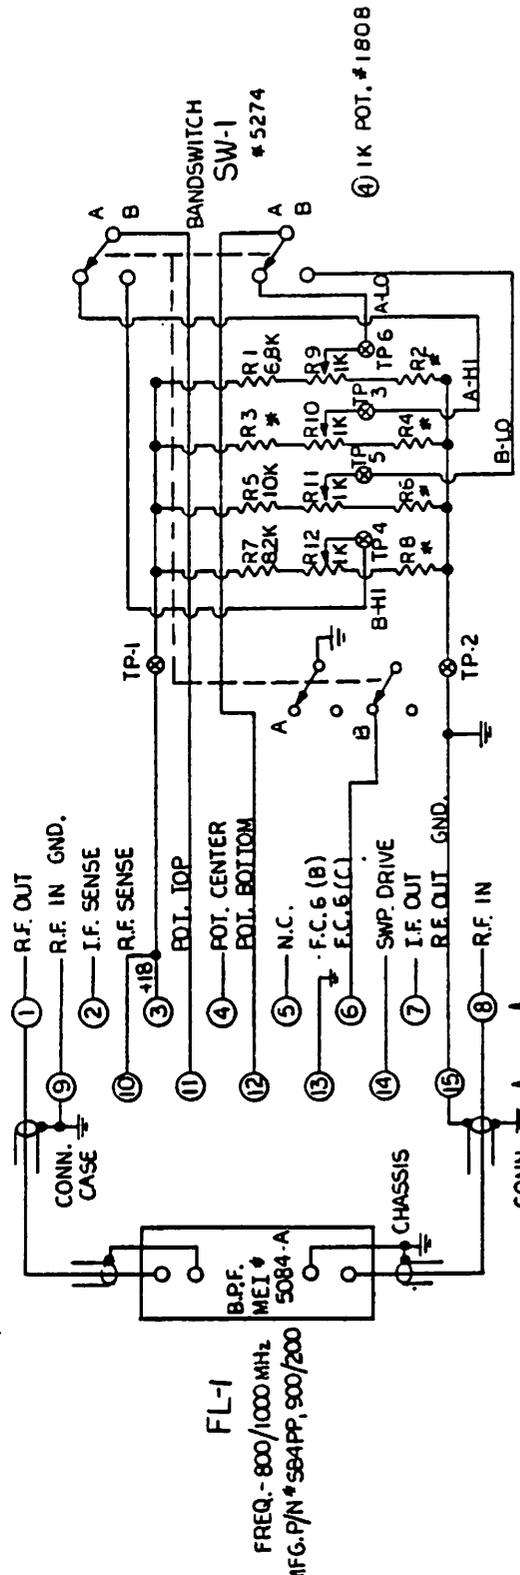


FIG. 26

SECRET / CONFIDENTIAL
 PROPERTY OF
 F. G. MASON ENGINEERING, INC.

TOLERANCES UNLESS OTHERWISE SPECIFIED	DECIMAL	APPROVED BY	SCALE
RESISTORS	± 5%	MM	1:1
CAPACITORS	± 5%		
TITLE			
T-9 SCHEMATIC WIRING DIAGRAM MPR-5			
DATE	2-19-85	DRAWING NUMBER	SWD-30889-B
ISSUE			3

R.F. MHz	LO MHz	VCO VC		K	
		V ₁	V ₂	R ₁	R ₂
BAND A	795 / 905	680 / 790	8.57 / 10.7	40	34.5
BAND B	895 / 1005	505 / 560	4.6 / 5.7	45	122
I.F.	115	#USES f _o x 2			

E.R.

DATE	SYM	REVISION RECORD	AUTH.	DR.	CK.



CIR. NO. NO. REQ.	PART NO. #	DESCRIPTION
1	4222-A	P.C. BOARD
2	5436-A	TERMINAL PINS
3	1808-A	POT. 1K
4	10-TBO-2-2	RES. 10K 1/8W. 5%
5	10-SRR-2-2	RES. 8.2K 1/8W. 5%
6	10-ASR-2-2	RES. 6.8K 1/8W. 5%
7	10-GTR-2-2	RES. 5.1K 1/8W. 5%
8	10-YVR-2-2	RES. 4.7K 1/8W. 5%
9	10-OOR-2-2	RES. 3.3K 1/8W. 5%

* - FACTORY SELECT.

SECRET / CONFIDENTIAL
PROPERTY OF
F. G. MASON ENGINEERING, INC.

FIG. 26

TOLERANCES (EXCEPT AS NOTED)	© MASON ENGINEERING INC. 1700 POST RD FAIRFIELD, CONN	
DECIMAL	SCALE	DRAWN BY
±	2X	SHL
FRACTIONAL	APPROVED BY	
±		
ANGULAR	TITLE	
±	T-9 P.C. BOARD ASSEMBLY MPR-5	
	DATE	DRAWING NUMBER
	12-3-85	30937-A
		ISSUE
		2

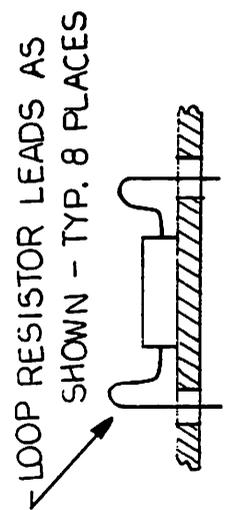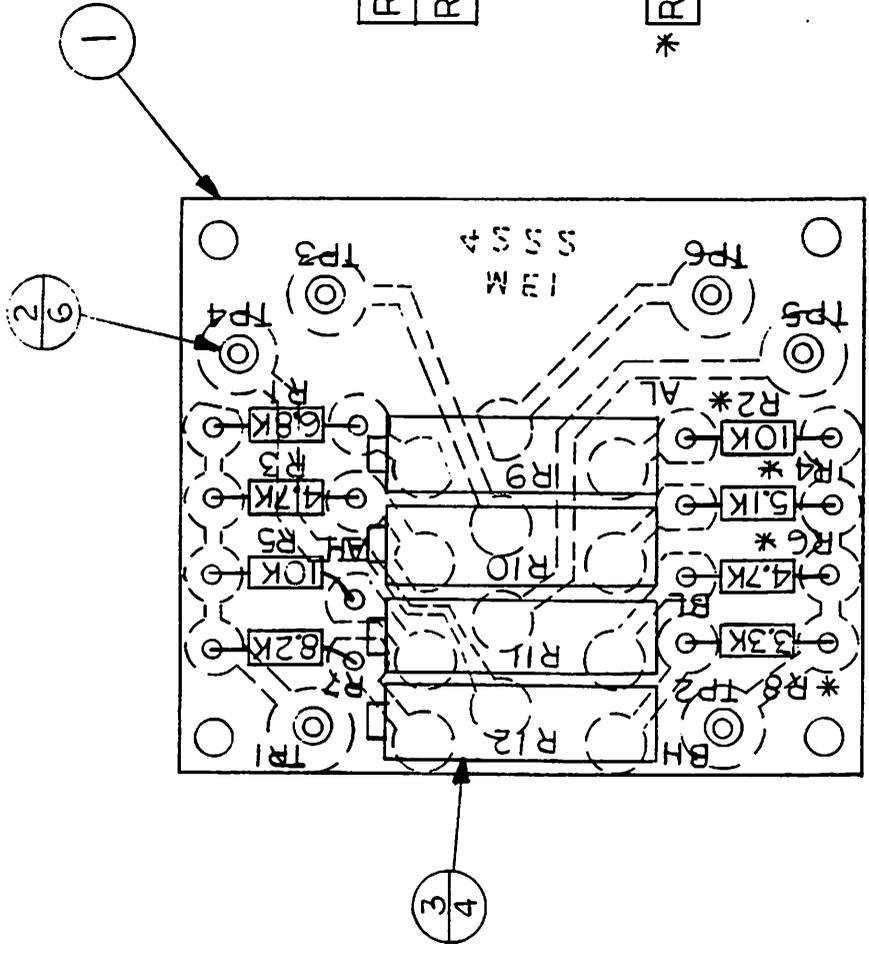


	1	30889-C
		USED ON -

E.R.:


WIRING LIST -

FROM -	TO -	COLOR -	LENGTH -
J-1 PIN *1	FL-1	COAX *1	
J-1 PIN *9	SOLDER TO TUNER MTG. BRKT/COAX *1 - BRAID		
J-1 PIN *8	FL-1	COAX *2	
J-1 PIN *15	SOLDER TO TUNER MTG. BRKT/COAX *2 - BRAID		
J-1 PIN *10	TP-1	RED	
J-1 PIN *3	TP-1	RED	
J-1 PIN *11	SW-1 PIN *2	BROWN	
J-1 PIN *12	SW-1 PIN *5	ORANGE	
J-1 PIN *6	SW-1 PIN *9	GRAY	
J-1 PIN *13	SOLDER TO SHELL OF CONN. - BURE		
SW-1 PIN *1	TP-3	YELLOW	
SW-1 PIN *3	TP-4	GREEN	
SW-1 PIN *6	TP-5	BLUE	
SW-1 PIN *4	TP-6	VIOLET	
SW-1 PIN *8	TP-2	BLACK	
TP-2	FL-1 BRACKET	BLACK	

BOTTOM VIEW

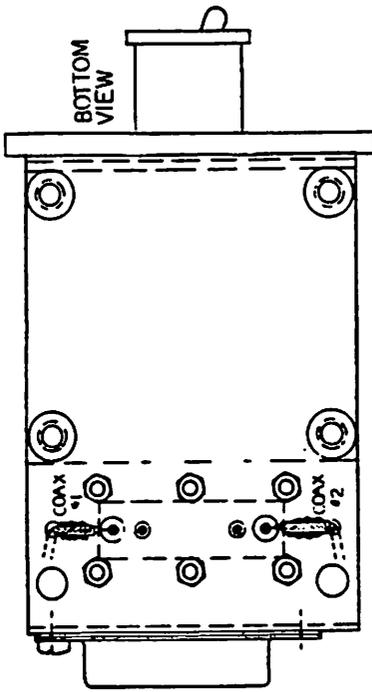

CIR. REQ.	PART NO. #	PART DESCRIPTION
1	30899-A	TUNER MTG. BRACKET ASSY
2	30477-A	P.C. BOARD ASSEMBLY
3	R-19200-B	TUNER CASE, REWORKED
4	5734-A	15-PIN CONNECTOR
5	5084-A	FILTER
6	6061-A	TUNER PANEL
7	5274-A	TOGGLE SWITCH
8	24487-A	SWITCH GUARD
9	13006-A	SPACERS
10		
11		
12	17522-A	LOCK-WASHER *4
13	18030-A	HEX NUT 1-72
14	18001-A	HEX NUT 4-40
15		
16	440-8-6-SS	SCREW, 440X1/4 PAN HD.
17	440-6-4-SS	SCREW, 440X3/16 FILLISTER
18	172-6-2-SS	SCREW, 172 X 3/16 BD. HD.
19	440-10-6-SS	SCREW, 440X5/16 PAN HD.
20		
21		
22		

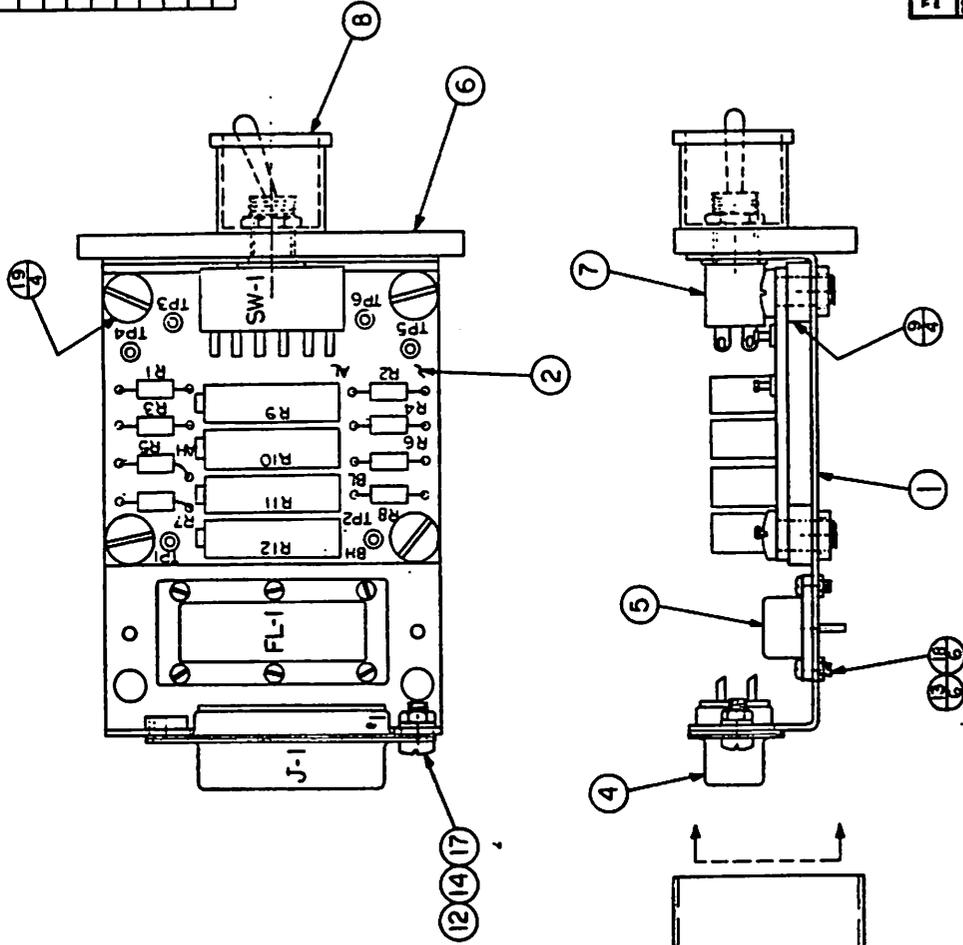

5-31-1

[7]	[7]
[2]	[5]
[3]	[3]
[0]	[0]
[3]	[7]
[3]	[7]

FIG. 27

ESSENTIAL
 IN 14 AF
 P. G. MASON ENGINEERING, INC.

MASON ENGINEERING, INC. 1700 POST RD. FAIRFIELD, CONN.	
DESIGNED BY	2X
DRAWN BY	
CHECKED BY	
TITLE	ASSEMBLY
DATE	5-29-65
PART NUMBER	30889-C
ISSUE	7

178000-B
 USED ON -

E.P.

DATE	REVISED	REVISION RECORD	AUTH.	DR.	CR.
12/1/85	1	CL. BY NO. 10000	TP		

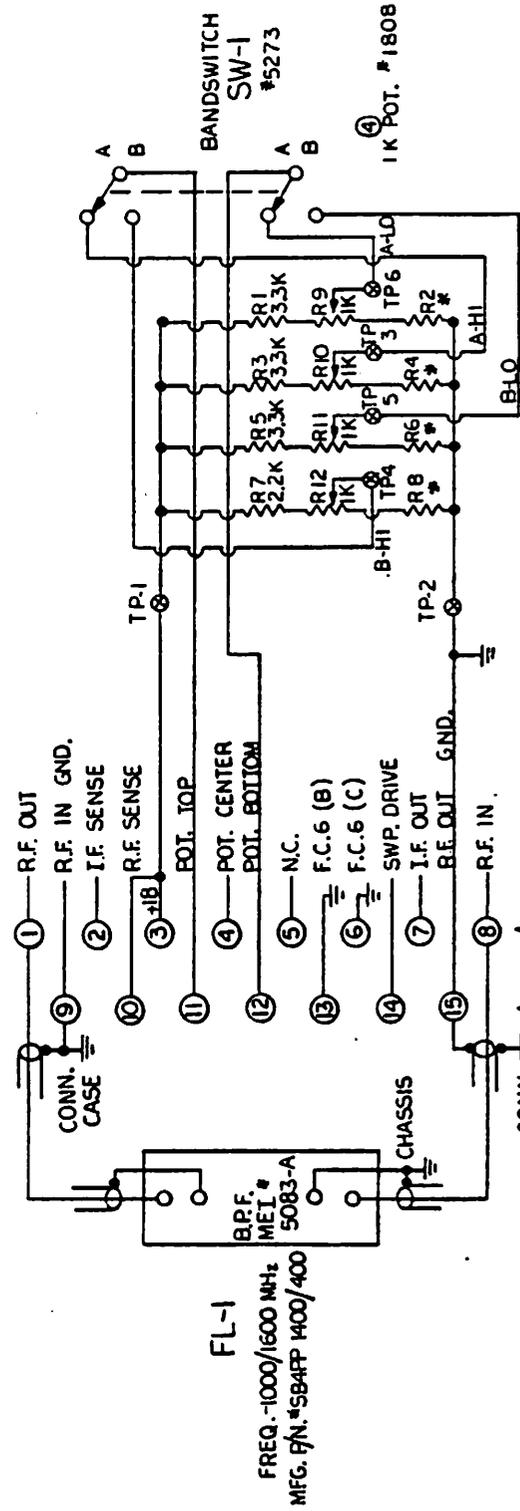


FIG. 28

	R.F. MHz	LO MHz	VCO VC (K)		R ₁	R ₂
			V ₁	V ₂		
BAND A	990 / 1310	552.5 / 712.5	5.65	8.79	18	30
BAND B	1290 / 1610	702.5 / 862.5	8.79	12.53	23	10
I.F.	115	4565 f ₀ X 2				

SECRET / CONFIDENTIAL
PROPERTY OF
F. G. MASON ENGINEERING, INC.

TOLERANCES UNLESS OTHERWISE SPECIFIED	MASON ENGINEERING INC. 1700 POST RD FAIRFIELD CONN	
DECIMAL	SCALE	DRAWN BY
2	1/16"	TP
FRACTIONAL		APPROVED BY
2		TP
TITLE	DATE	DRAWING NUMBER
T-10 SCHEMATIC WIRING DIAGRAM MPR-5	2-19-85	SWD-30890-B
ISSUE		
3		

E.R.-

DATE	SYM	REVISION RECORD	AUTH.	DR.	CK.


CIR. NO.	NO. REQ.	PART NO. *	DESCRIPTION
1	1	4222-A	P.C. BOARD
2	6	5436-A	TERMINAL PINS
3	4	1808-A	POT, 1K
4	4	10-00R-2-2	RES. 3.3K 1/8W. 5%
5	1	10-RRR-2-2	RES. 2.2K 1/8W. 5%
6	1	10-TRR-2-2	RES. 1.2K 1/8W. 5%
7	1	10-RBR-2-2	RES. 2K 1/8W. 5%
8	1	10-GAR-2-2	RES. 5.6K 1/8W. 5%

* - FACTORY SELECT.

SECRET / CONFIDENTIAL
PROPERTY OF
F. G. MASON ENGINEERING, INC.

FIG. 29

TOLERANCES (EXCEPT AS NOTED)	©	MASON ENGINEERING INC. 1700 POST RD FAIRFIELD, CONN
DECIMAL	SCALE	DRAWN BY
± $\sqrt{2}$	2X	<i>SK</i>
FRACTIONAL	TITLE	APPROVED BY
± $\sqrt{2}$	T-10 P.C. BOARD ASSEMBLY MPR-5	
ANGULAR	DATE	ISSUE
± $\sqrt{2}$	12-3-85	1
	DRAWING NUMBER	
	30938-A	

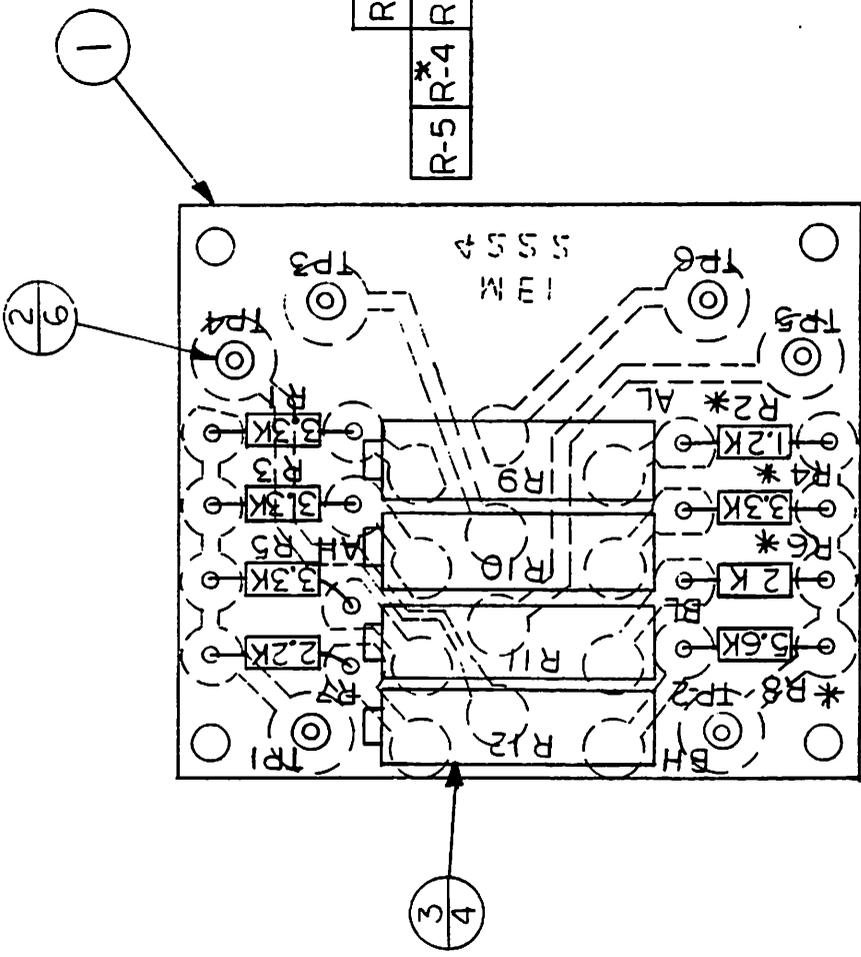

LOOP RESISTOR LEADS AS
SHOWN - TYP. 8 PLACES

1	30890-C
USED ON -	
E.R.:	

WIRING LIST -

FROM -	TO -	COLOR -	LENGTH
J-1 PIN *1	FL-1	COAX *1	
J-1 PIN *9	SOLDER TO TUNER MFG. BRACKET	CENT. COND.	
J-1 PIN *8	FL-1	COAX *1 - BRAID	
J-1 PIN *15	FOLDER TO TUNER MFG. BRACKET	CENT. COND.	
J-1 PIN *10	TP-1	RED	
J-1 PIN *3	TP-1	RED	
J-1 PIN *11	SW-1 PIN *2	BROWN	
J-1 PIN *12	SW-1 PIN *5	ORANGE	
J-1 PIN *6 + *13	SOLDER TO SHELL OF CONN. - BUS WIRE		
SW-1 PIN *1	TP-3	YELLOW	
SW-1 PIN *3	TP-4	GREEN	
SW-1 PIN *6	TP-5	BLUE	
SW-1 PIN *4	TP-6	VIOLET	
TP-2	FL-1	BRAID *1	
		BLACK	


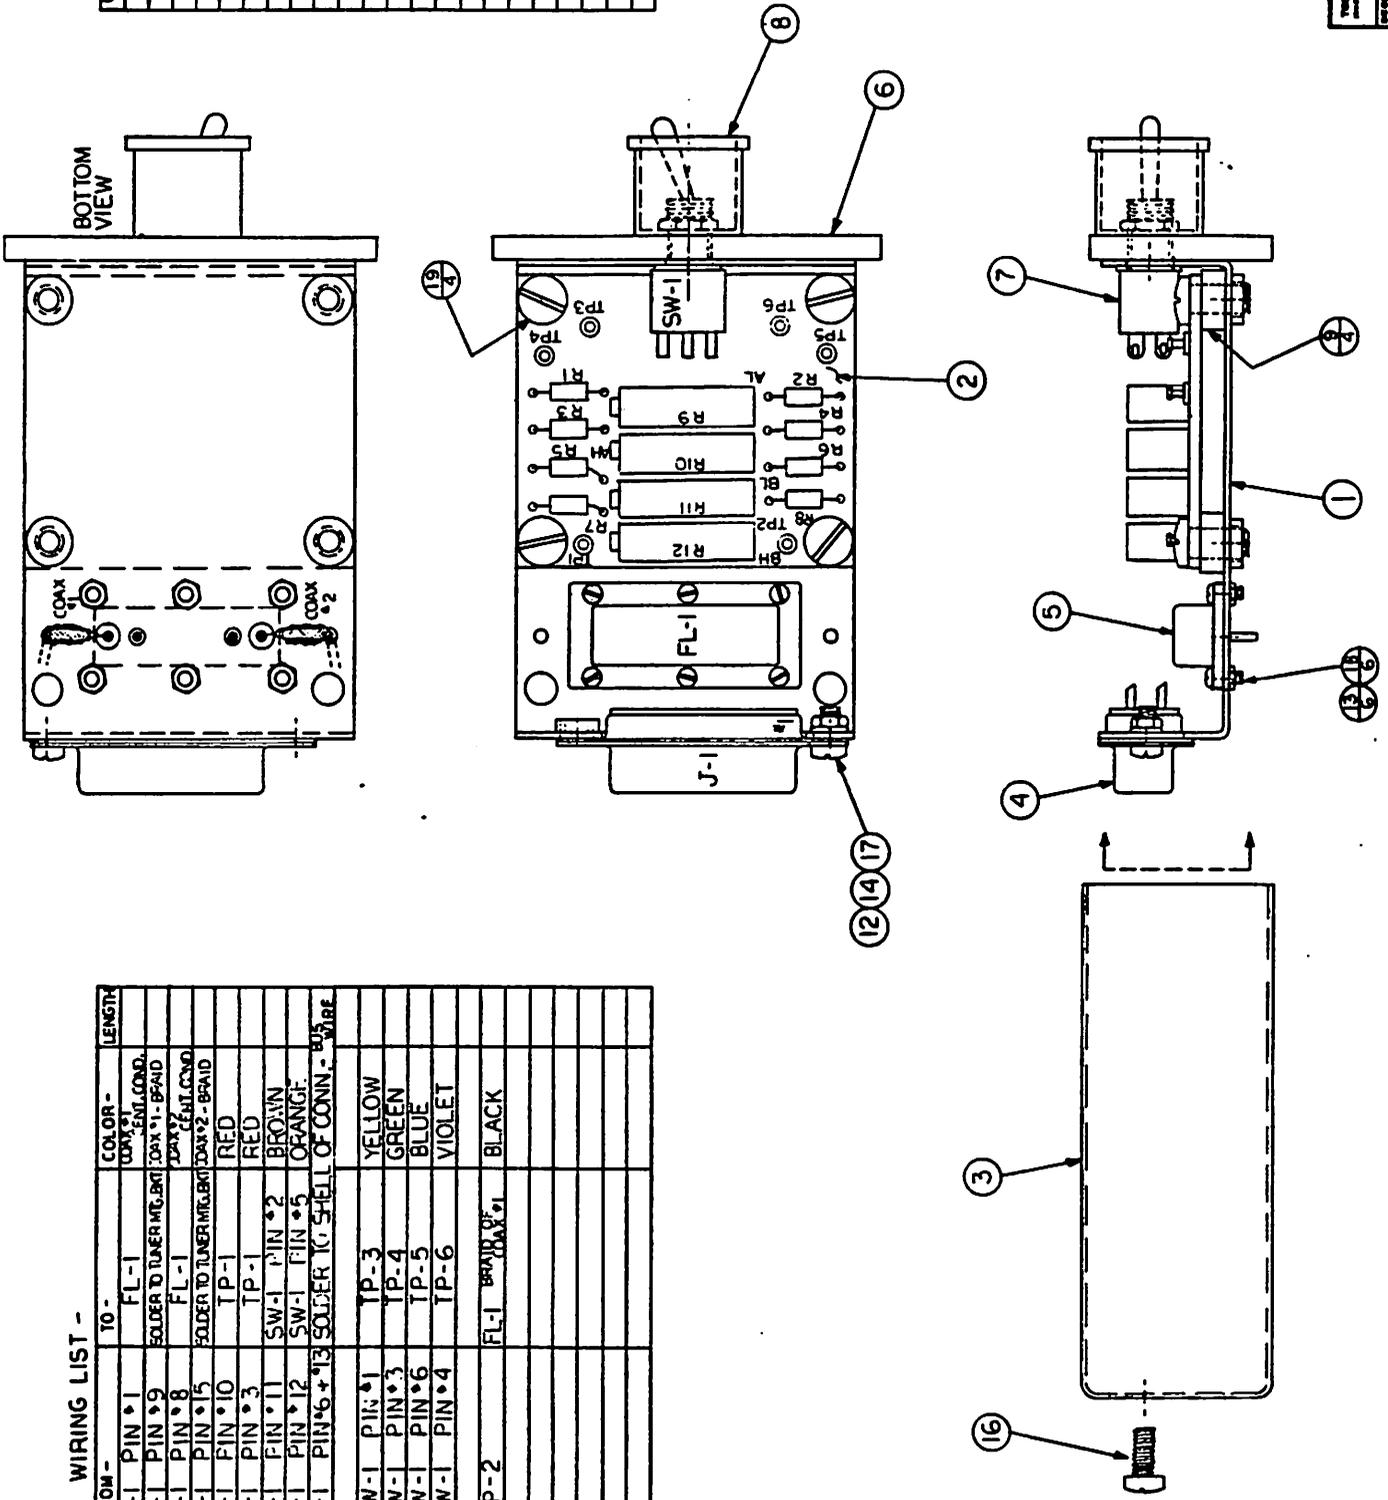


FIG. 30

NOT TO BE RELEASED
 UNLESS AUTHORIZED BY
 MASON ENGINEERING, INC.

MASON ENGINEERING, INC. 1700 POST RD FAIRFIELD, CONN.	TITLE TMPRS-10 ASSEMBLY	DATE 6-28-85	DRAWING NUMBER 30890-C	ISSUE 4
--	----------------------------	-----------------	---------------------------	------------

178000-B
 USED ON -

DATE	SPM	REVISION RECORD	AUTH.	DR. CK.

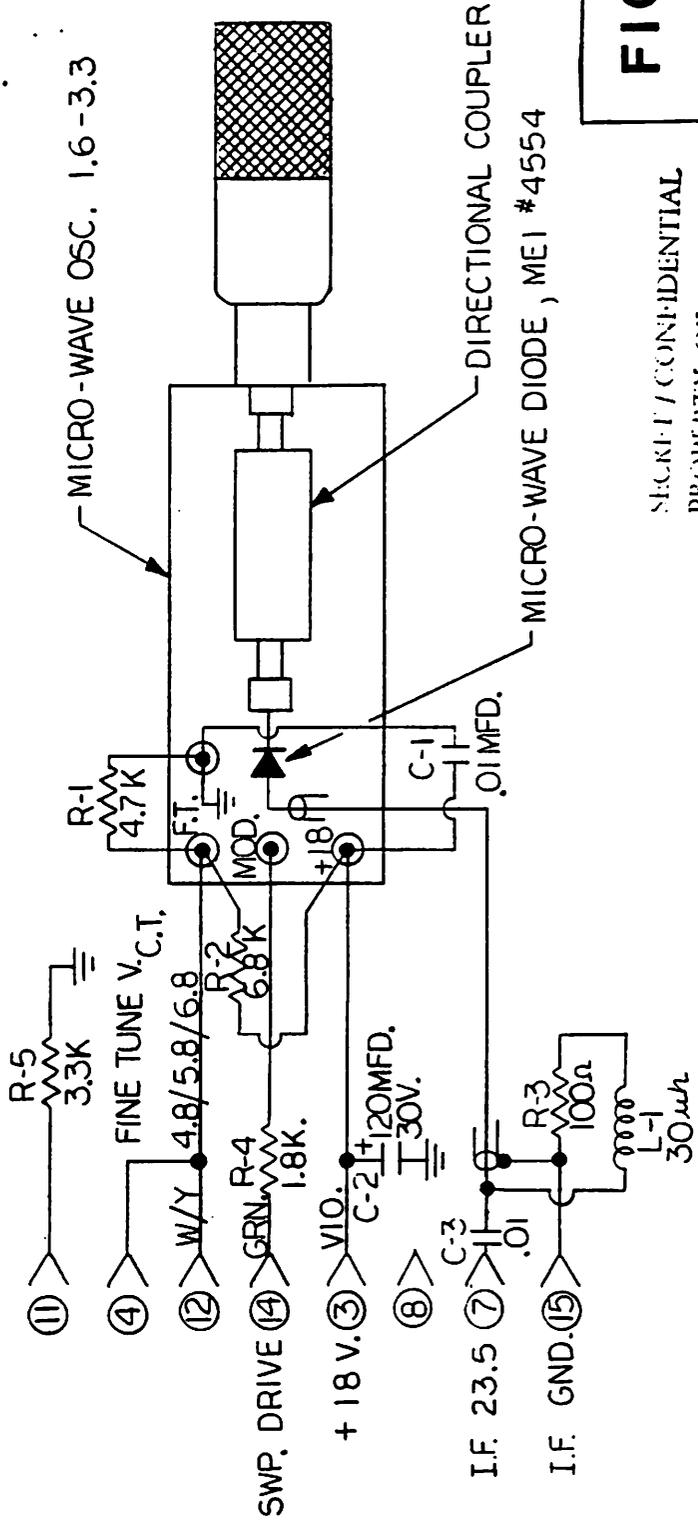


FIG. 31


SECRET / CONFIDENTIAL
PROPERTY OF
F. G. MASON ENGINEERING, INC.

NO CONNECTIONS ON PINS :
1, 2, 5, 6, 8, 9, 10, 13


TOLERANCES (EXCEPT AS NOTED)	DECIMAL	±	FRACTIONAL	±	ANGULAR	±
		~	~	~	~	~
© MASON ENGINEERING INC. 1700 POST RD FAIRFIELD, CONN.			SCALE	~	DRAWN BY	SK
					APPROVED BY	
TITLE			TMPR5-11 SCHEMATIC		MPR-5	
DATE			5-15-85		ISSUE	
DRAWING NUMBER			SWD-30557-A		3	

E.R.:

L.O. FREQ - 1.623/3.344 GHz
 R.F. - 1.6/10 GHz

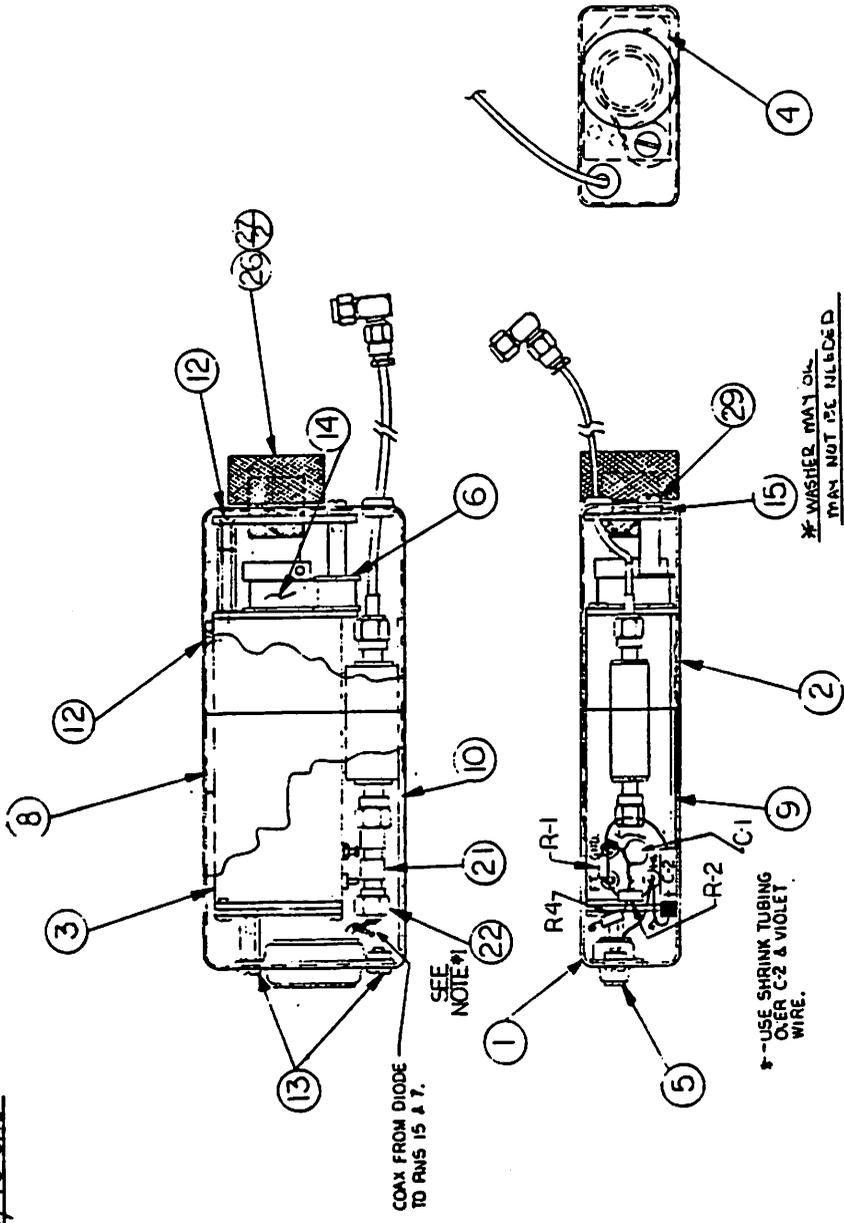

* WASHIER MAY BE
 THAN NOT PC NEEDED

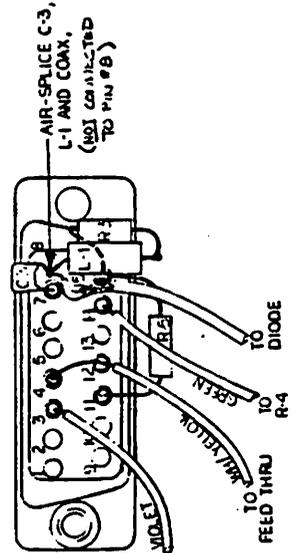

NOTES:
 1. ADD EPOXY TO REWORKED CONNECTOR (ITEM 22)
 AFTER WIRE LEAD IS SOLDERED.

FIG. 32

QTY	PART NO.	PART DESCRIPTION
1	R-193C-C	TUNER CASE NEW WORK
2	30575-A	DIAPHRAGM CABLE ASSY.
3	30579-B	D.C. FEEDWORK FOR TUNER
4	30611-A	FRONT COVER PLASSY
5	30576-A	CONNECTOR ASSY.
6	16000-A	SPOOL, IDLER
7	0039	CAPACITOR, OMFED DEL
8	24456-A	TUNER SHIM
9	24457-A	TUNER SHIM
10	24458-A	TUNER SHIM
11	0055	CAPACITOR 120 pF 30V
12	440-818-1	SCREW 440x4/4
13	440-824-1	SCREW 440x4/4
14	23024-A	DIAL TAPE
15	17533-A	WASHER
16	10TSR-3-2	RESISTOR 1.8K 1/4W 5%
17	3604-A	CHOKE 30 uH
18	10YFK-3-2	RESISTOR 4.7K 1/4W 5%
19	10ASR-3-2	RESISTOR 6.8K 1/4W 5%
20	10TBT-3-2	RESISTOR 100 Ohm 1/4W 5%
21	4554-A	DIGIT
22	R-5034-A	CONNECTOR, REWORK
23		COAX WIRE, 14/160-U
24		WIRE, 28GA. PVC.
25		SHRINK SLEEVING
26	R036-A	RILOB
27	632-E-5	FLT SCREW
28	10-004-3	RESISTOR 3.3K 1/4W 5%
29	10-04-004	RESISTOR 100 Ohm 1/4W 5%
30		CONNECTOR, D.I.N.

UNCLASSIFIED
 PRODUCT OF
 ELECTRON ENGINEERING, INC.

UNCLASSIFIED	ASSEMBLY NUMBER	DATE	ISSUE
GENERAL	FULL	2-2-81	12
PRELIMINARY	TUNER #11 ASSEMBLY, TMPP-5-11		
REWORKED			

1	79,000	USED ON:
1	72,000	
ER-975	30557-C	

DATE	REVISION	RECORD	AUTH	DR.	CR.

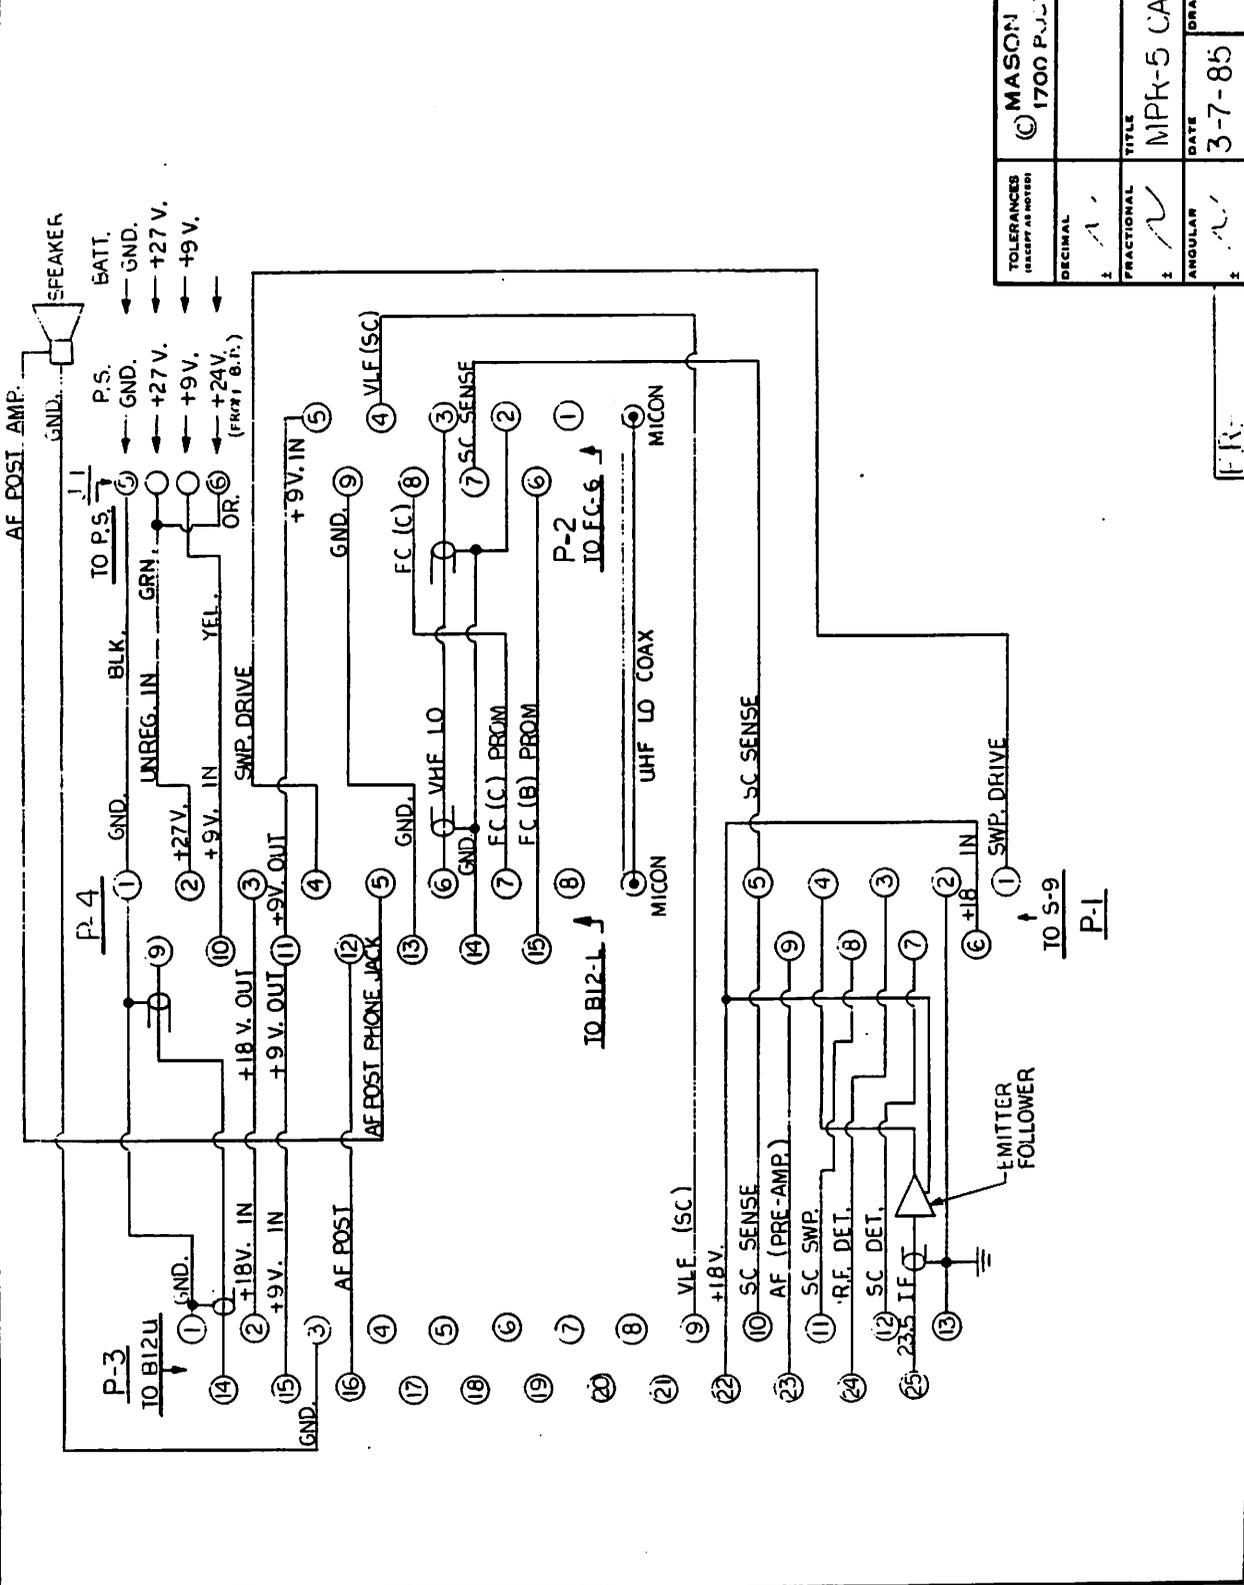


FIG. 33

SECRET / CONFIDENTIAL
 PROPERTY OF
 F. G. MASON ENGINEERING, INC.

TOLERANCES UNLESS OTHERWISE SPECIFIED	© MASON ENGINEERING INC. 1700 PULASKI AVENUE, HARTFORD, CONN.	
DECIMAL	SCALE	DRAWN BY
FRACTIONAL	APPROVED BY	
ANGULAR	TITLE	
	DATE	DRAWING NUMBER
	3-7-85	SWP-30879-B
		ISSUE
		3

MADE IN U.S.A.

WIRE LIST:

FROM -	TO -	WIRE COLOR/CODING	LENGTH	WIRE GAUGE
P-3 PIN*14	P-4 PIN*9	BLACK/WHITE
P-3 PIN*1	P-4 PIN*1	BLACK/SHIELD
P-4 PIN*2	P-4 PIN*3	ORANGE
P-4 PIN*3	WAF*1	BLACK
P-4 PIN*4	P-2 WAF*	BROWN
P-4 PIN*5	P-4 PIN*5	WH/YELLOW
P-1 PIN*7	P-2 PIN*7	WH/YELLOW
P-3 PIN*11	P-1 PIN*8	BLUE
P-3 PIN*12	P-1 PIN*7	GRAY
P-3 PIN*15	P-4 PIN*11	WH/ORANGE
P-4 PIN*1	P-2 PIN*5	WH/ORANGE
P-3 PIN*16	P-4 PIN*12	WH/GRAY
P-3 PIN*22	P-1 PIN*6	RED
P-4 PIN*23	P-1 PIN*9	GREEN
P-4 PIN*24	P-1 PIN*3	VIOLET
FLUOR-INPUT	P-3 PIN*25	GRAY/EMT.COND.
FLUOR-INPUT	P-3 PIN*13	GRAY/SHIELD
FLUOR-INPUT	P-1 PIN*4	GRAY/EMT.COND.
FLUOR-INPUT	P-1 PIN*2	GRAY/SHIELD
FLUOR	P-1 PIN*6	RED
FLUOR	SL-1	BLACK
P-1 PIN*1	SL-1	GRAY JUMPER
P-1 PIN*4	P-1 PIN*1	WHITE
P-1 PIN*5	SPEAKER	WH/GRAY
P-1 PIN*6	P-2 PIN*3	GRAY/EMT.COND.
P-1 PIN*7	P-2 PIN*2	GRAY/SHIELD
P-1 PIN*8	P-2 PIN*6	WH/RED
P-1 PIN*13	SL-1	BLACK
P-1 PIN*15	P-2 PIN*6	WH/BLUE
P-2 PIN*9	SL-1	BLACK
J-1	SL-1	BLACK
J-1	P-4 PIN*2	GREEN
J-1	P-4 PIN*10	YELLOW
J-1	P-4 PIN*10	BROWN
J-1	P-4 PIN*2	ORANGE

- NOTES:**
- 1. * WIRE NOTED.
 - 2. WIRES ALL 28 GA. EXCEPT WHERE NOTED.

CIP	REP	REV	REVISED	DATE	BY
1	1	1			
2	1	1			
3	1	1			
4	1	1			
5	1	1			
6	1	1			
7	1	1			
8	1	1			
9	1	1			
10	1	1			
11	1	1			
12	1	1			
13	1	1			
14	1	1			
15	1	1			
16	1	1			
17	1	1			

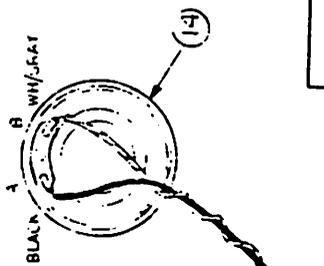
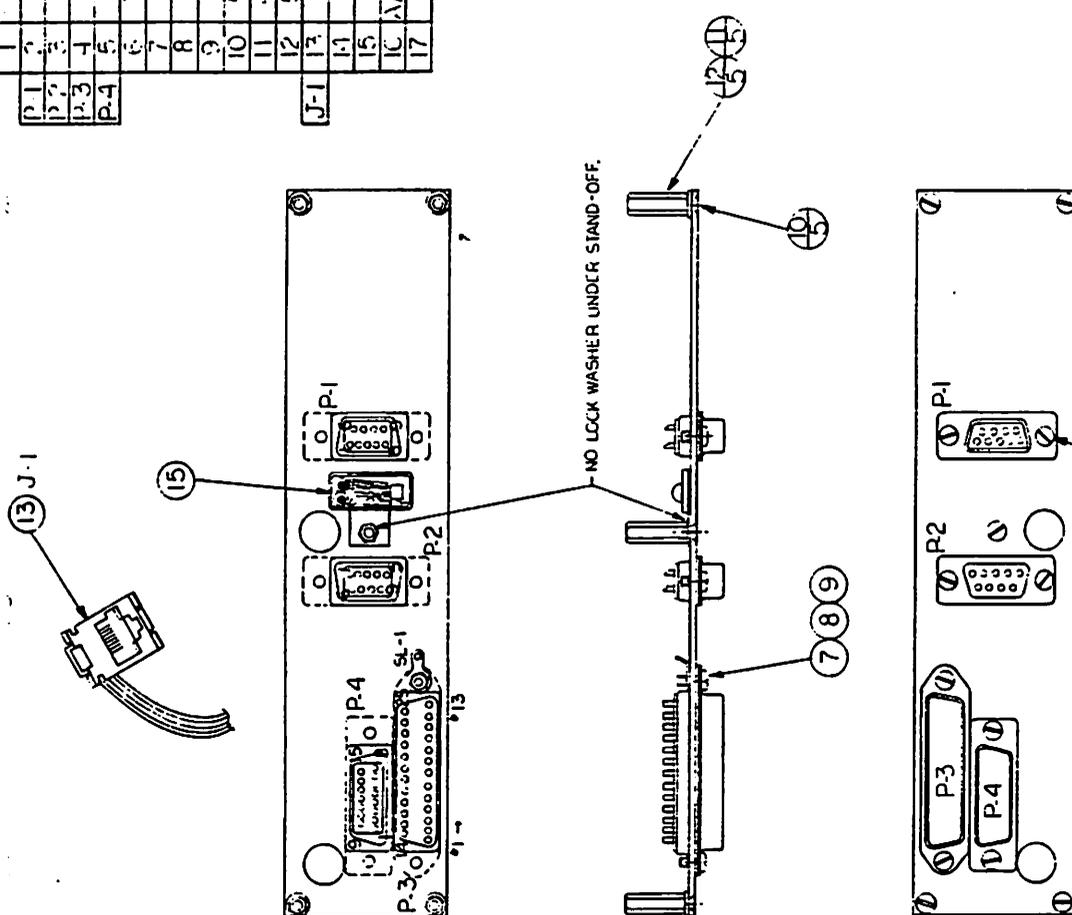


FIG. 34

DESIGNED BY: [Signature]
 CHECKED BY: [Signature]
 APPROVED BY: [Signature]
 DATE: 7-19-85
 DRAWING NUMBER: 30879-C



TOLERANCES UNLESS OTHERWISE SPECIFIED	SCALE	DATE	BY
FRACTIONAL	FULL		
DECIMAL			
CHECKED BY	APPROVED BY	DATE	BY
MISSION ENGINEERING INC. 1700 POST RD FAIRFIELD CONN.			
TITLE CONNECTOR MOUNTING PLATE ASSY. NIP			
DRAWN BY		DATE	
		7-19-85	
PART NUMBER		DRAWING NUMBER	
30879-C		30891-C	
REV. NO.		REV. NO.	
1		1	
DATE		DATE	

WIRE LIST:

FROM -	TO -	WIRE COLOR	WIRE GAUGE	WIRE LENGTH	WIRE TYPE
P-3 PIN*14	P-4 PIN*9	WHT/BLACK	28 GA.		*
P-3 PIN*1	P-4 PIN*1	WHT/BLACK	28 GA.		*
P-4 PIN*2	P-4 PIN*3	ORANGE	28 GA.		*
P-3 PIN*3	P-4 PIN*4	BLACK	28 GA.		*
P-3 PIN*4	P-2 PIN*4	BROWN	28 GA.		*
P-3 PIN*10	P-1 PIN*5	WHT/YELLOW	28 GA.		*
P-1 PIN*6	P-2 PIN*7	WHT/YELLOW	28 GA.		*
P-3 PIN*11	P-1 PIN*8	BLUE	28 GA.		*
P-3 PIN*12	P-1 PIN*7	GRAY	28 GA.		*
P-3 PIN*15	P-4 PIN*11	WHT/ORANGE	28 GA.		*
P-4 PIN*10	P-2 PIN*5	WHT/ORANGE	28 GA.		*
P-3 PIN*16	P-4 PIN*12	WHT/GRAY	28 GA.		*
P-3 PIN*22	P-1 PIN*6	RED	28 GA.		*
P-3 PIN*23	P-1 PIN*9	GREEN	28 GA.		*
P-3 PIN*24	P-1 PIN*3	VIOLET	28 GA.		*
FLUORER-IN/P-3	PIN*25	GRAY/WHITE/COND.	28 GA.		*
FLUORER-IN/P-3	PIN*13	GRAY-SHIELD	28 GA.		*
FLUORER-IN/P-1	PIN*4	GRAY/WHITE/COND.	28 GA.		*
FLUORER-IN/P-1	PIN*2	GRAY-SHIELD	28 GA.		*
FLUORER	P-1 PIN*6	BLD	28 GA.		*
FLUORER	SL-1	BLACK	28 GA.		*
P-1 PIN*1	SL-1	BLACK JUMPER	28 GA.		*
P-4 PIN*4	P-1 PIN*1	WHITE	28 GA.		*
P-4 PIN*5	FLUORER B/P-1	WHT/GRAY	28 GA.		*
P-3 PIN*6	P-2 PIN*3	GRAY/WHITE/COND.	28 GA.		*
P-4 PIN*4	P-2 PIN*2	GRAY-SHIELD	28 GA.		*
P-4 PIN*7	P-2 PIN*6	WHT/RED	28 GA.		*
P-4 PIN*13	SL-1	BLACK	28 GA.		*
P-4 PIN*15	P-2 PIN*6	WHT/BLUE	28 GA.		*
P-2 PIN*9	SL-1	BLACK	28 GA.		*
J-1	SL-1	BLACK	28 GA.		*
J-1	P-4 PIN*2	GREEN	28 GA.		*
J-1	P-4 PIN*10	YELLOW	28 GA.		*
J-1	P-4 PIN*10	BROWN	28 GA.		*
J-1	P-4 PIN*2	ORANGE	28 GA.		*

NOTES:

- * WIRE ADDED.
- WIRES ALL 28 GA., EXCEPT WHERE NOTED.

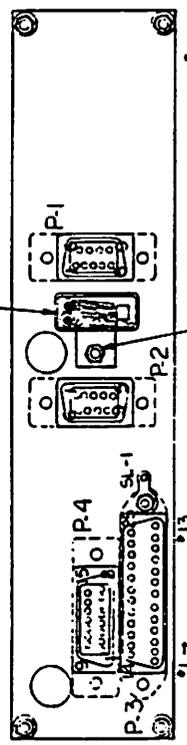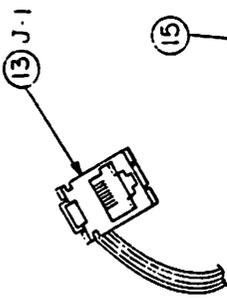

NO LOCK WASHER UNDER STAND-OFF.

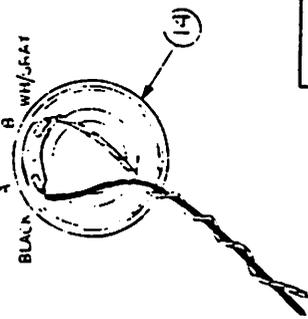
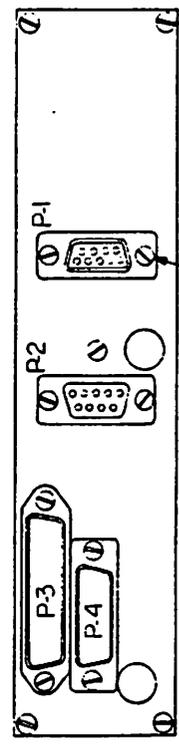
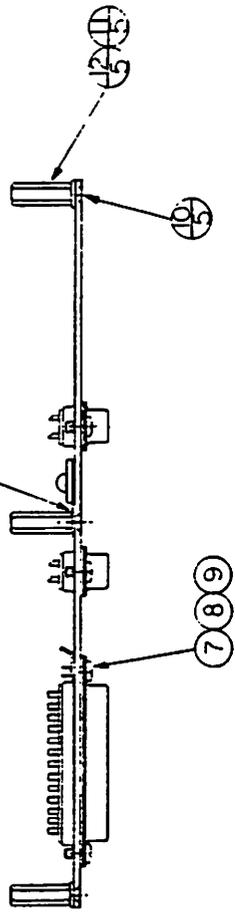


FIG. 34


CONNECTIONS
 IN READY OF
 P. G. MASON ENGINEERING, INC.

TOLERANCES UNLESS OTHERWISE SPECIFIED	AS SHOWN	SCALE	FULL
FRACTIONALS	AS SHOWN	DATE	7-19-85
APPROVAL	AS SHOWN	DESIGN NUMBER	30879-C
TITLE	CONNECTOR MOUNTING PLATE ASSY. MFR	ISSUE	1

CONNECTIONS
 1700 POST RD. FAIRFIELD, CONN.
 P. G. MASON ENGINEERING, INC.

FR-
 30879-C
 1700 POST RD. FAIRFIELD, CONN.

DATE SYN	REVISION RECORD	AUTH.	DR.	CK.

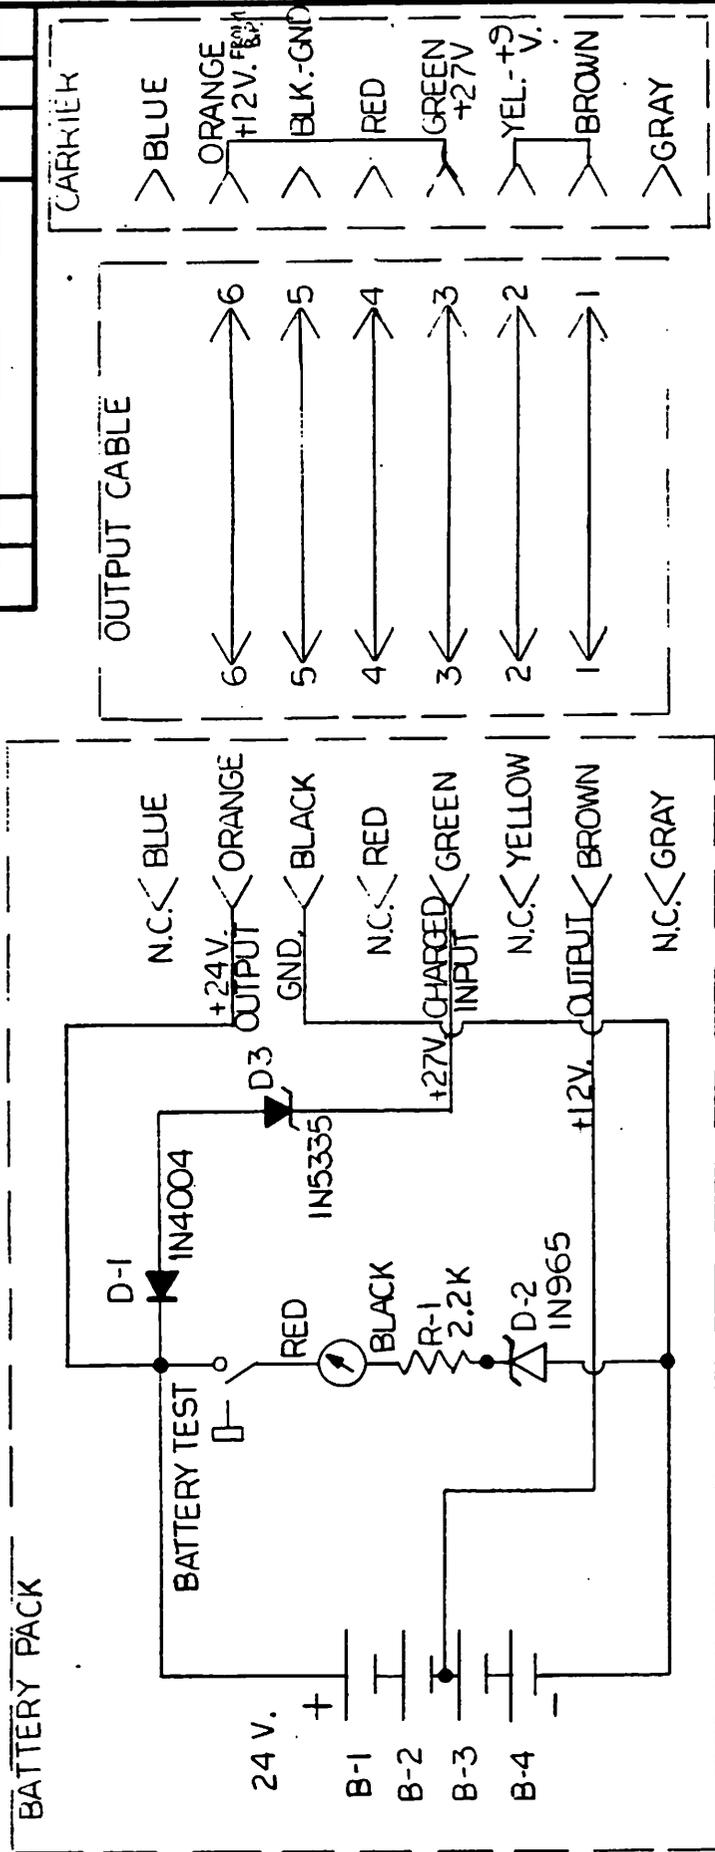

SECRET / CONFIDENTIAL
 PROPERTY OF
 F. G. MASON ENGINEERING, INC.

FIG. 35

TOLERANCES (EXCEPT AS NOTED)	MASON ENGINEERING INC. 1700 POST RD FAIRFIELD. CONN.	
DECIMAL ±	SCALE A	DRAWN BY SM
FRACTIONAL ±	APPROVED BY	
ANGULAR ±	TITLE B.P.-10 SCHEMATIC MPR-5	
DATE 8-9-85		ISSUE 2
DRAWING NUMBER SWD-30880-A		

ER-

DATE	REVISION	RECORD	AUTH	CHK

QTY	REQ	PART NO.	PART DESCRIPTION
1	1	21100-C	BATTERY FACE LABEL
2	1	21107-B	BATTERY FACE COVER
3	1	21108-A	BATTERY FACE BRACKET
4	1	6417-A	WATTMETER
5	2	5481-A	TERMINAL STRIP
6	1	6256-A	TEST METER
7	1	5210-A	TEST METER SWITCH
8	1	4540-A	WIRE BRACKET
9	1	4510-A	WIRE INSULATOR
10	1	10480-2-2	RECTIFIER BRACKET
11	1	5733-A	RECTIFIER JACK
12	1	5904-A	BATT TEST LABEL
13	5	14496-A	STAND OFF
14	1	14496-A	STAND OFF
15	2	14496-A	STAND OFF
16	7	17927-A	LOCK WASHER
17	12	440-8-1B-SS-6	SCREWS, 440 X 1/4 FLAT HD. SLACK
18	1	4560-C	SHIELD LINER
19	1	440-10-1B-SS-5	SCREWS, 440 X 3/16 FLAT HD. SLACK

D1
D2
R1

D-3

NOTES:

- ADDED WIRES TO RE 22 GA. P.V.C.
- ADD FOAM PAD-DING AROUND BATTERIES WHERE LOOSE.

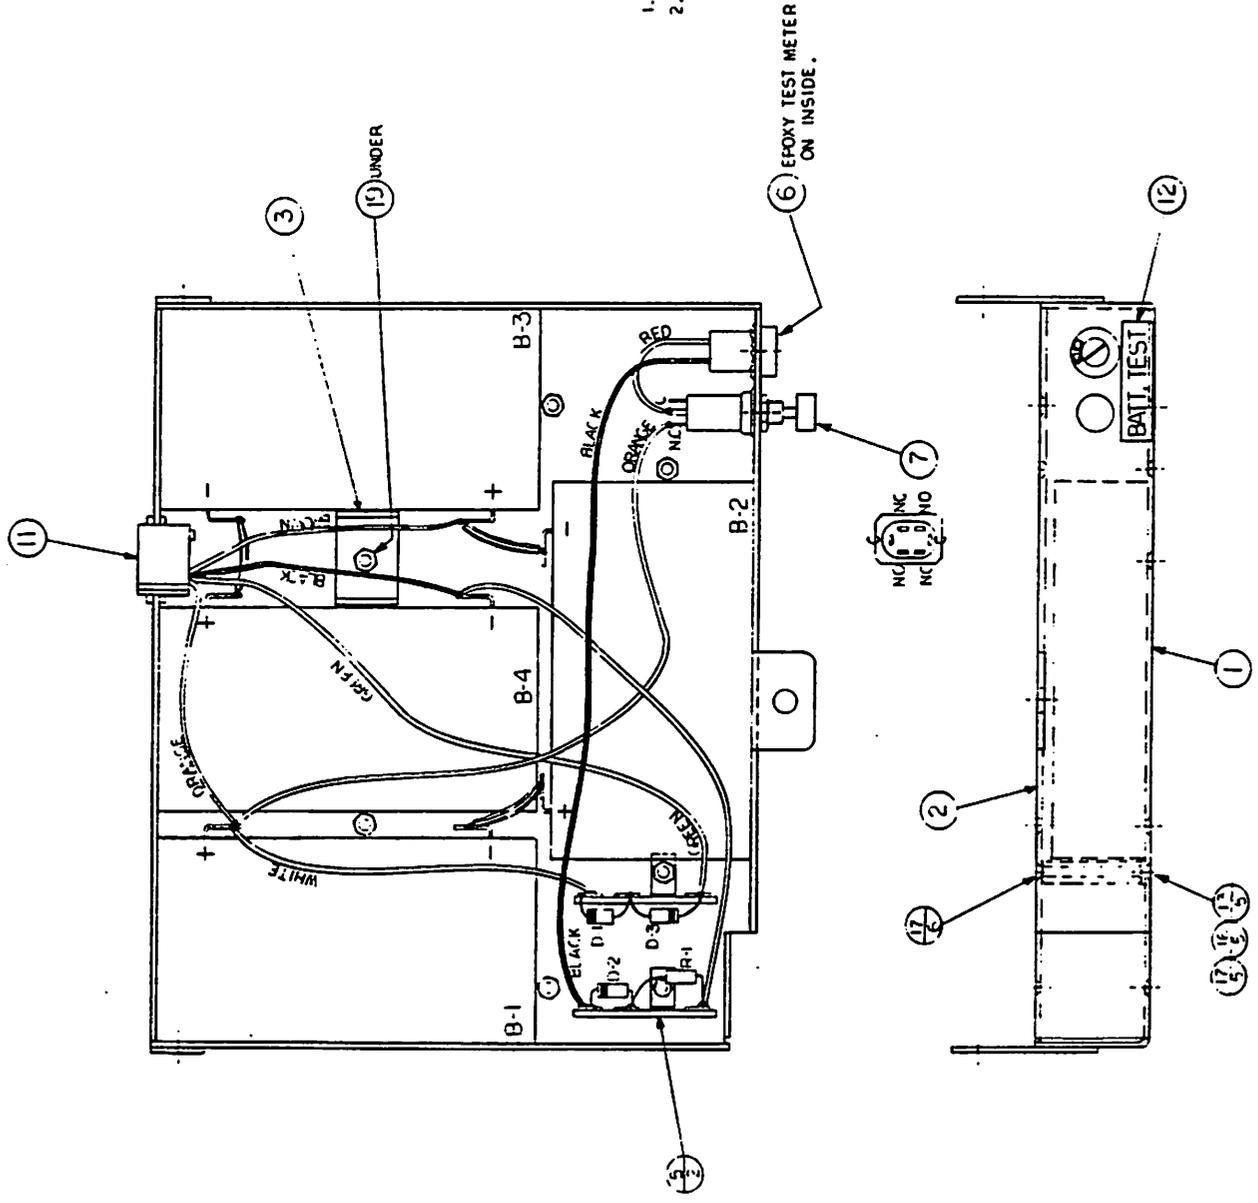


FIG. 36

NOT CONFIDENTIAL
PROPERTY OF
MASON ENGINEERING, INC.

MASON ENGINEERING INC. 7700 POST RD FARMERS DALE OHIO		DATE	3-9-85	REVISED BY	30860-C
TOLERANCES UNLESS OTHERWISE SPECIFIED	DECIMAL	FRACTIONAL	ANGLE	THREADS	FINISH
GENERAL	0.0005	1/32	45°	UNC	AS SHOWN
PREFERENTIAL	0.001	1/64	30°	UNC	AS SHOWN
APPROVAL	DESIGNED BY	DRAWN BY	CHECKED BY	DATE	ISSUE
					2

1178000-B
USED CN

E.R.

DATE	SYM	REVISION RECORD	AUTH	CHK	CL
11/14/54		SEE ER-990			SA
11/14/54		SEE ER-1045			SA

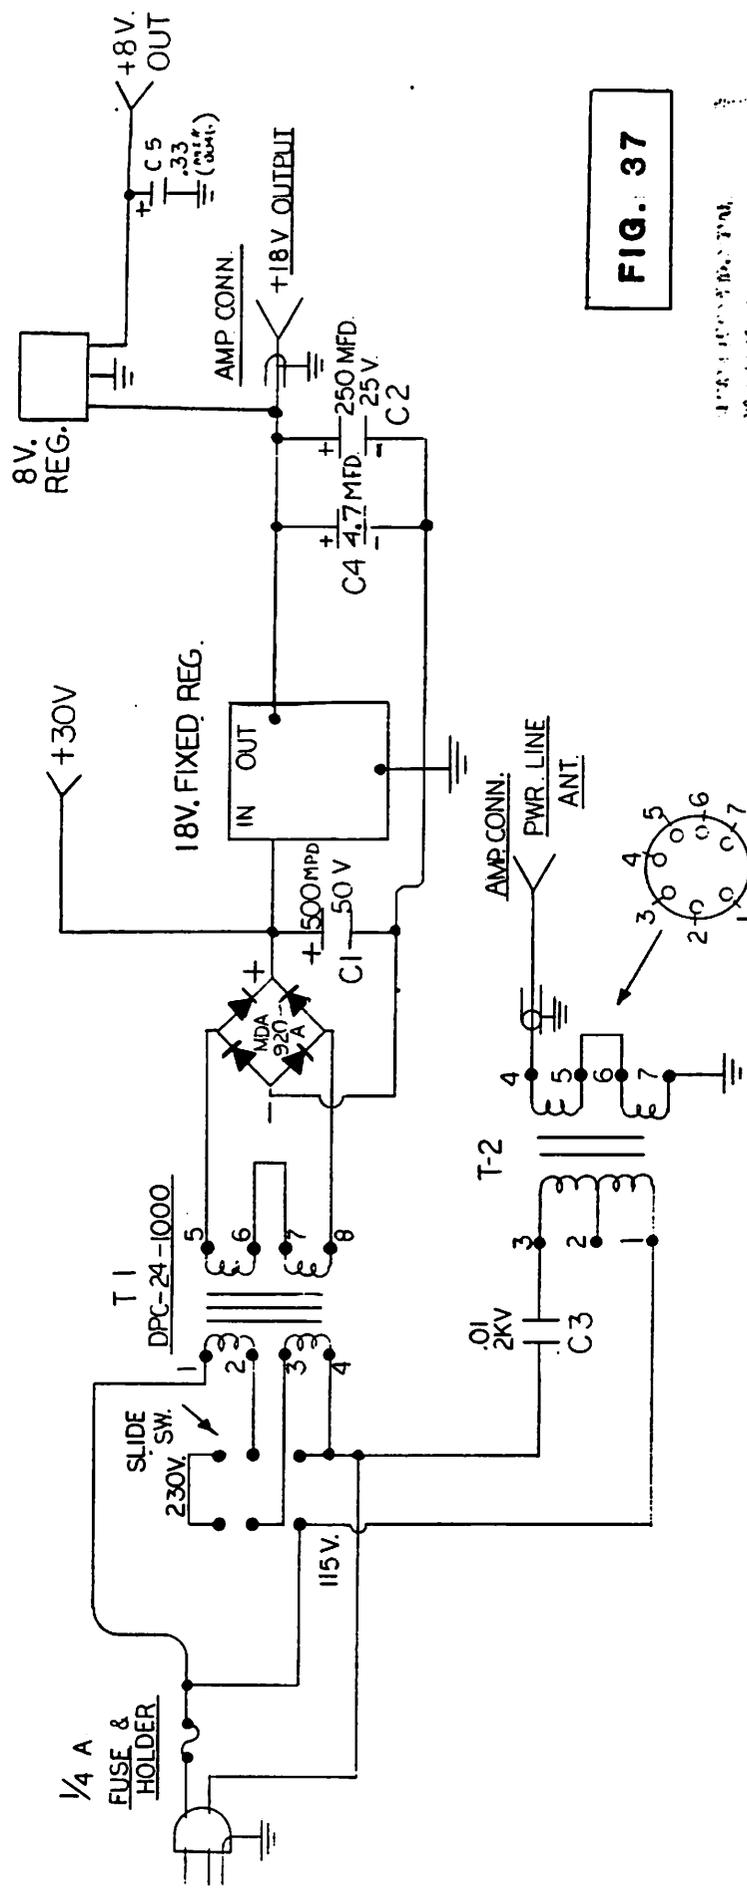



FIG. 37

PROJECT NO. 438-1
 U. S. AIR FORCE
 WRIGHT-PATTERSON AIR FORCE BASE, OHIO


TOLERANCES EXCEPT AS NOTED	DECIMAL	FRACTIONAL	ANGULAR	MASON ENGINEERING INC. 1700 POST RD. FAIRFIELD, CONN.
±	±	±	±	DRAWN BY: <i>SWH</i> APPROVED BY: <i>KJJ</i>
TITLE				ISSUE
P.S. 11A POWER SUPPLY				4
DATE				DRAWING NUMBER
5-18-78				SWD 4138-1

ERJ01G

BOTTOM VIEW



REV	NO	DATE	BY	REASON
1	1	1/64		
2	1	1/64		
3	1	1/64		
4	1	1/64		
5	1	1/64		
6	1	1/64		
7	1	1/64		
8	1	1/64		
9	1	1/64		
10	1	1/64		
11	1	1/64		
12	1	1/64		

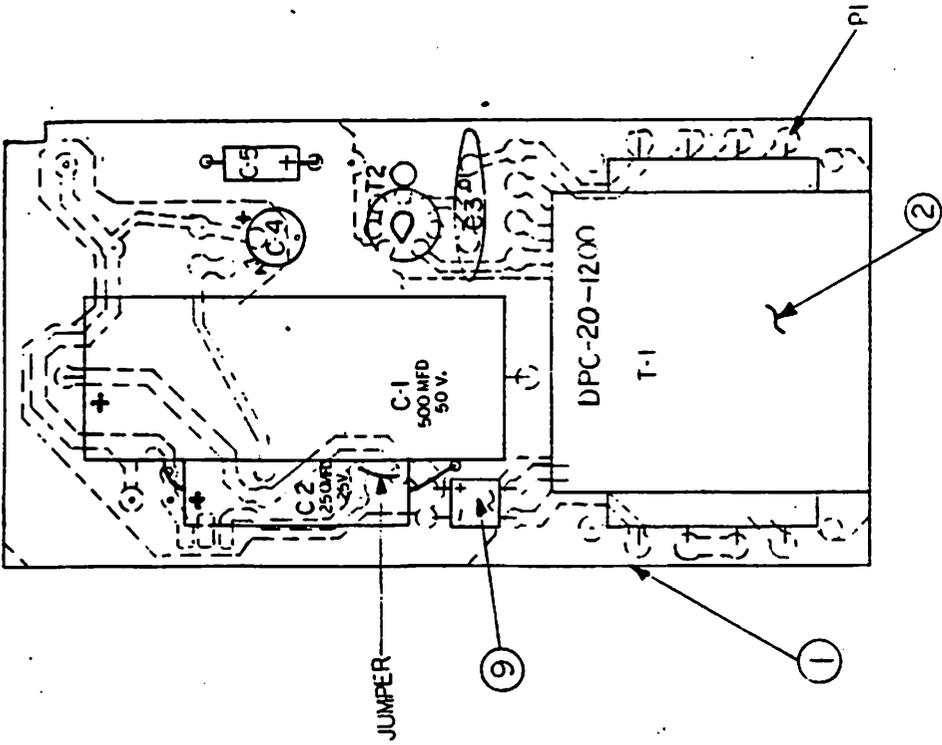


3

3

3

4

11

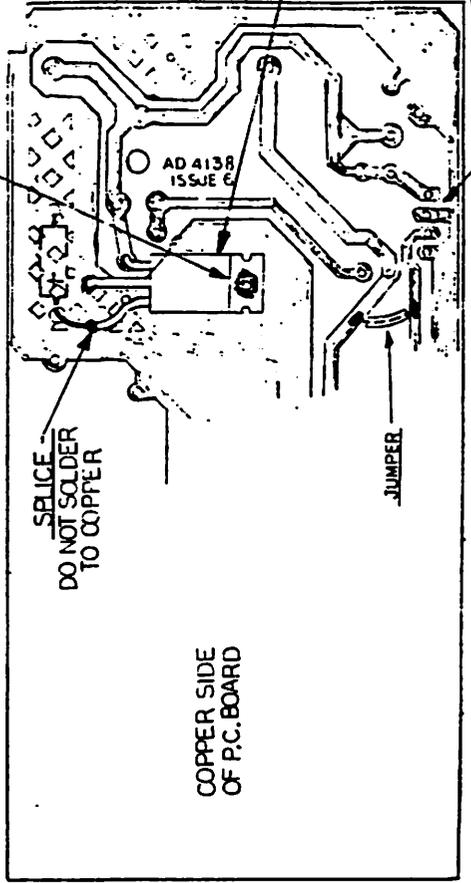

DO NOT SOLDER TO COPPER

COPPER SIDE OF P.C. BOARD

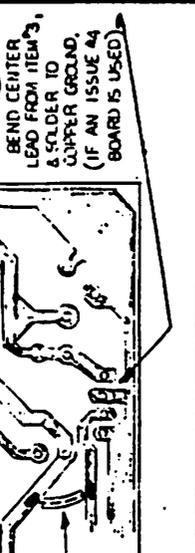


FIG. 38

USED ON
7 30412-D
1 30706-D

REV. 1
1/64

DATE
3-22-78

DESIGNED BY
E. J. A.

APPROVED BY
E. J. A.

SCALE
2X

PS 20

QTY.	NO.	PART NO.	PART DESCRIPTION
1	1	30403-B	P.C. BOARD COMPLETE *USE #30721-B FOR MPR-4.
2	1	3041-A	TRANSFORMER TPC-201200 T-1
3	1	22331-A	TRANSFORMER MOUNT
4	1	0139	CAPACITOR 500mfd 50V. C-1
5	1	0057	CAPACITOR 250mfd 25V. C-2
6	1	0041	CAPACITOR .01 .1KV. C-3
7	1	3027-A	TRANSFORMER PL. T-2
8	1	0162	CAPACITOR 4.7mfd 25V. C-4
9	1	4533-A	BRIDGE RECTIFIER
10	1	0046	CAPACITOR .33mfd C-5
11	1	4794-A	REGULATOR 8V.
12	4	140-4155	5-RW15 440x1/8




FR-1016

MASON ENGINEERING INC.
13000 BOULEVARD, SUITE 200, FAIRFIELD, CALIF. 94534

DATE 3-22-78
DRAWING NUMBER 1WJ-4138-C
PAGE 3

FROM SW-3 PIN #	TO :	COLOR:	LENGTH:
1	TP-41	BROWN	5 1/2"
2	TP-42	RED	4 1/2"
3	TP-43	ORANGE	4 1/2"
4	TP-44	YELLOW	4 1/2"
5	TP-45	GREEN	4 1/2"
6	TP-34	BLUE	6"
7	TP-35	VIOLET	6"
8	TP-36	GRAY	7"
9	TP-37	WHITE	7"
10	TP-38	BLACK	7"
B	TP-39	WH./BLACK	6 1/2"
A	TP-46	WH./RED	6"

SW-3

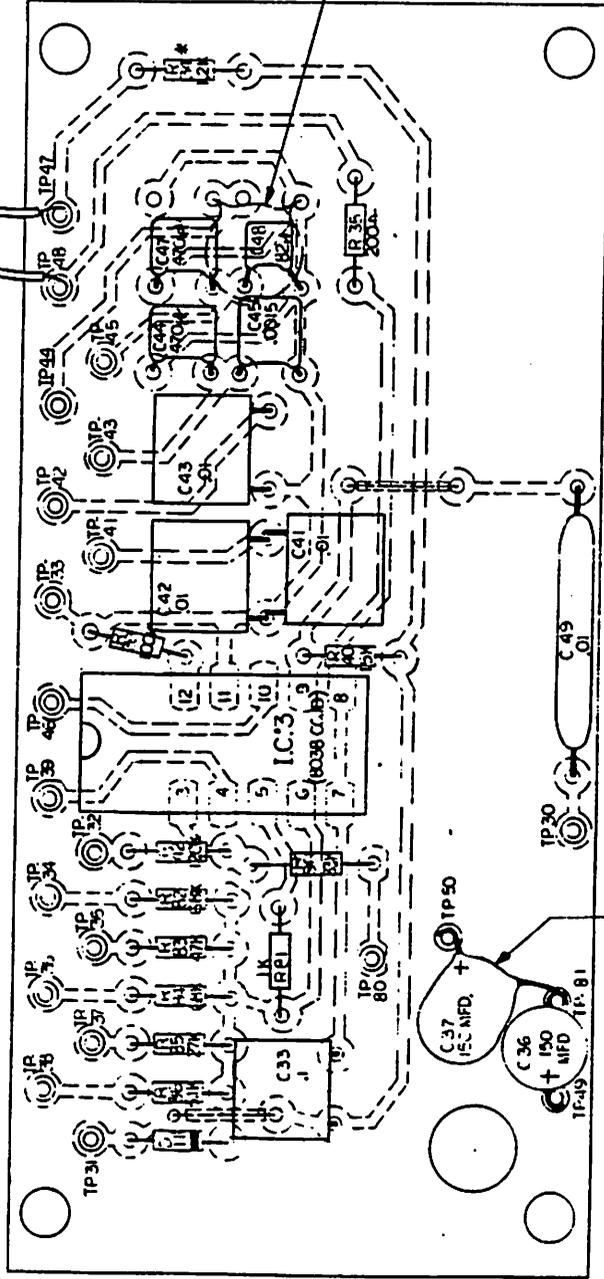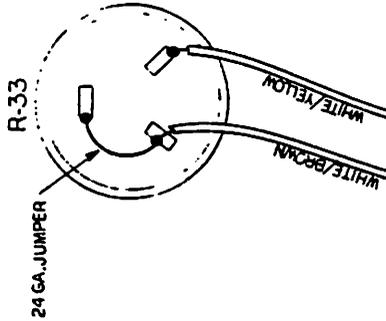

C-46, .001 (UNDER BOARD)

LAY C-37 DOWN.

QTY	QTY	REF. NO.	PART DESCRIPTION	REV. REC'D	DATE	BY
1	1	AM-115-B	PC BOARD - AS MACH.			
1	1	TP-33	WIRE			
1	1	TP-34	WIRE			
1	1	TP-35	WIRE			
1	1	TP-36	WIRE			
1	1	TP-37	WIRE			
1	1	TP-38	WIRE			
1	1	TP-39	WIRE			
1	1	TP-40	WIRE			
1	1	TP-41	WIRE			
1	1	TP-42	WIRE			
1	1	TP-43	WIRE			
1	1	TP-44	WIRE			
1	1	TP-45	WIRE			
1	1	TP-46	WIRE			
1	1	TP-47	WIRE			
1	1	TP-48	WIRE			
1	1	TP-49	WIRE			
1	1	TP-50	WIRE			
1	1	TP-51	WIRE			
1	1	TP-52	WIRE			
1	1	TP-53	WIRE			
1	1	TP-54	WIRE			
1	1	TP-55	WIRE			
1	1	TP-56	WIRE			
1	1	TP-57	WIRE			
1	1	TP-58	WIRE			
1	1	TP-59	WIRE			
1	1	TP-60	WIRE			
1	1	TP-61	WIRE			
1	1	TP-62	WIRE			
1	1	TP-63	WIRE			
1	1	TP-64	WIRE			
1	1	TP-65	WIRE			
1	1	TP-66	WIRE			
1	1	TP-67	WIRE			
1	1	TP-68	WIRE			
1	1	TP-69	WIRE			
1	1	TP-70	WIRE			
1	1	TP-71	WIRE			
1	1	TP-72	WIRE			
1	1	TP-73	WIRE			
1	1	TP-74	WIRE			
1	1	TP-75	WIRE			
1	1	TP-76	WIRE			
1	1	TP-77	WIRE			
1	1	TP-78	WIRE			
1	1	TP-79	WIRE			
1	1	TP-80	WIRE			
1	1	TP-81	WIRE			
1	1	TP-82	WIRE			
1	1	TP-83	WIRE			
1	1	TP-84	WIRE			
1	1	TP-85	WIRE			
1	1	TP-86	WIRE			
1	1	TP-87	WIRE			
1	1	TP-88	WIRE			
1	1	TP-89	WIRE			
1	1	TP-90	WIRE			
1	1	TP-91	WIRE			
1	1	TP-92	WIRE			
1	1	TP-93	WIRE			
1	1	TP-94	WIRE			
1	1	TP-95	WIRE			
1	1	TP-96	WIRE			
1	1	TP-97	WIRE			
1	1	TP-98	WIRE			
1	1	TP-99	WIRE			
1	1	TP-100	WIRE			

FIG. 49

SECRET / CONFIDENTIAL
PROPERTY OF
F. C. MANN ENGINEERING, INC.

MASON ENGINEERING INC.
17003 POST RD. FAIRFIELD, CONN.


SCALE 1X
DRAWN BY [Signature]
APPROVED BY [Signature]

TOLERANCES UNLESS OTHERWISE SPECIFIED
DECIMAL .001
FRACTIONAL 1/32


TITLE SAW TOOTH PCB BOARD ASSY.
DATE 8-22-62
DRAWING NUMBER EMI-1104-C

ISSUE

SAWTOOTH BOARD TERMINAL LOCATIONS -

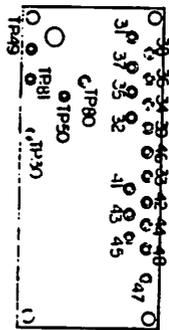

ITEM NO.	PART NO.	PART DESCRIPTION
1	PMO-1193-D	HIGH VOLTAGE PC BOARD ASSY
2	PMO-4125-C	SAWTOOTH PC BOARD ASSY
3	305533-A	CRIT SOCKET BRACKET
4	51577-A	CRIT SOCKET
5	1106055	CRIT SOCKET BRACKET
6	2566055	CRIT SOCKET BRACKET
7	5030-A	CONNECTOR - NO HARDWARE
8		CONNECTOR - NEEDED
9		

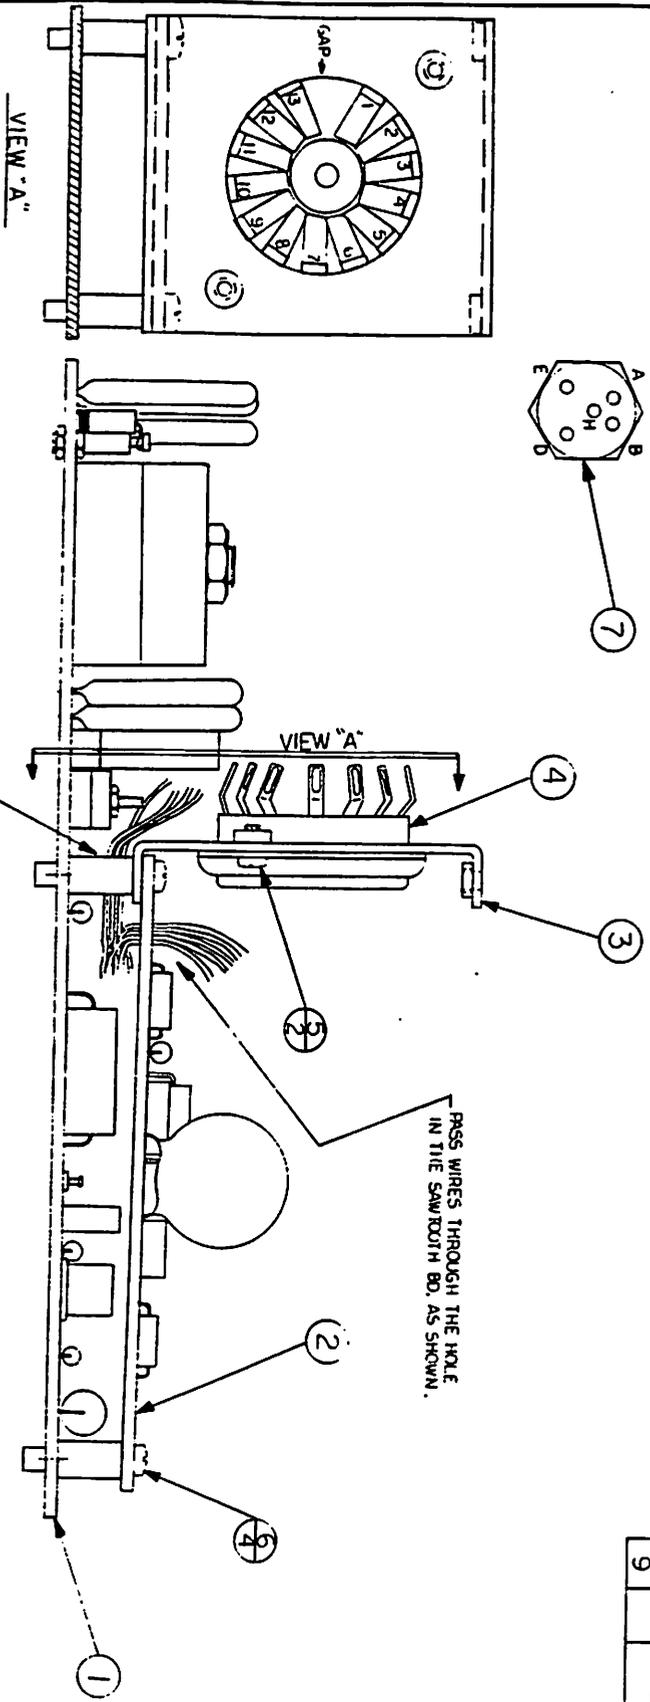

WIRE LIST:

COLOR -	FROM -	LENGTH -	TO -	VIOLET	HV BOARD	CRIT SOCKET
BLK/ORANGE	HV BOARD		TP-30			CRIT SOCKET PIN-7
WH/GRN	FRONT		TP-33			CRIT SOCKET PIN-12
GRN	"		TP-32			CRIT SOCKET PIN-13
BLK (HLL)	"		TP-31			
WH/GRN	"		TP-80			
BLK	HV BOARD		CRIT SOCKET PIN-1			SAWTOOTH, TP-50
GRN	"		CRIT SOCKET PIN-1			5 PIN CONN. PIN A
GRN	"		CRIT SOCKET PIN-2			PIN B
GRN	"		CRIT SOCKET PIN-3			PIN D
GRN	"		CRIT SOCKET PIN-4			PIN E
GRN	"		CRIT SOCKET PIN-5			PIN F
GRN	"		CRIT SOCKET PIN-6			PIN G
GRN	"		CRIT SOCKET PIN-7			PIN H
GRN	"		CRIT SOCKET PIN-8			PIN I
GRN	"		CRIT SOCKET PIN-9			PIN J
GRN	"		CRIT SOCKET PIN-10			PIN K
GRN	"		CRIT SOCKET PIN-11			PIN L
GRN	"		CRIT SOCKET PIN-12			PIN M
GRN	"		CRIT SOCKET PIN-13			PIN N
GRN	"		CRIT SOCKET PIN-14			PIN O
GRN	"		CRIT SOCKET PIN-15			PIN P
GRN	"		CRIT SOCKET PIN-16			PIN Q
GRN	"		CRIT SOCKET PIN-17			PIN R
GRN	"		CRIT SOCKET PIN-18			PIN S
GRN	"		CRIT SOCKET PIN-19			PIN T
GRN	"		CRIT SOCKET PIN-20			PIN U
GRN	"		CRIT SOCKET PIN-21			PIN V
GRN	"		CRIT SOCKET PIN-22			PIN W
GRN	"		CRIT SOCKET PIN-23			PIN X
GRN	"		CRIT SOCKET PIN-24			PIN Y
GRN	"		CRIT SOCKET PIN-25			PIN Z
GRN	"		CRIT SOCKET PIN-26			PIN AA
GRN	"		CRIT SOCKET PIN-27			PIN AB
GRN	"		CRIT SOCKET PIN-28			PIN AC
GRN	"		CRIT SOCKET PIN-29			PIN AD
GRN	"		CRIT SOCKET PIN-30			PIN AE
GRN	"		CRIT SOCKET PIN-31			PIN AF
GRN	"		CRIT SOCKET PIN-32			PIN AG
GRN	"		CRIT SOCKET PIN-33			PIN AH
GRN	"		CRIT SOCKET PIN-34			PIN AI
GRN	"		CRIT SOCKET PIN-35			PIN AJ
GRN	"		CRIT SOCKET PIN-36			PIN AK
GRN	"		CRIT SOCKET PIN-37			PIN AL
GRN	"		CRIT SOCKET PIN-38			PIN AM
GRN	"		CRIT SOCKET PIN-39			PIN AN
GRN	"		CRIT SOCKET PIN-40			PIN AO
GRN	"		CRIT SOCKET PIN-41			PIN AP
GRN	"		CRIT SOCKET PIN-42			PIN AQ
GRN	"		CRIT SOCKET PIN-43			PIN AR
GRN	"		CRIT SOCKET PIN-44			PIN AS
GRN	"		CRIT SOCKET PIN-45			PIN AT
GRN	"		CRIT SOCKET PIN-46			PIN AU
GRN	"		CRIT SOCKET PIN-47			PIN AV
GRN	"		CRIT SOCKET PIN-48			PIN AW
GRN	"		CRIT SOCKET PIN-49			PIN AX
GRN	"		CRIT SOCKET PIN-50			PIN AY
GRN	"		CRIT SOCKET PIN-51			PIN AZ
GRN	"		CRIT SOCKET PIN-52			PIN BA
GRN	"		CRIT SOCKET PIN-53			PIN BB
GRN	"		CRIT SOCKET PIN-54			PIN BC
GRN	"		CRIT SOCKET PIN-55			PIN BD
GRN	"		CRIT SOCKET PIN-56			PIN BE
GRN	"		CRIT SOCKET PIN-57			PIN BF
GRN	"		CRIT SOCKET PIN-58			PIN BG
GRN	"		CRIT SOCKET PIN-59			PIN BH
GRN	"		CRIT SOCKET PIN-60			PIN BI
GRN	"		CRIT SOCKET PIN-61			PIN BJ
GRN	"		CRIT SOCKET PIN-62			PIN BK
GRN	"		CRIT SOCKET PIN-63			PIN BL
GRN	"		CRIT SOCKET PIN-64			PIN BM
GRN	"		CRIT SOCKET PIN-65			PIN BN
GRN	"		CRIT SOCKET PIN-66			PIN BO
GRN	"		CRIT SOCKET PIN-67			PIN BP
GRN	"		CRIT SOCKET PIN-68			PIN BQ
GRN	"		CRIT SOCKET PIN-69			PIN BR
GRN	"		CRIT SOCKET PIN-70			PIN BS
GRN	"		CRIT SOCKET PIN-71			PIN BT
GRN	"		CRIT SOCKET PIN-72			PIN BU
GRN	"		CRIT SOCKET PIN-73			PIN BV
GRN	"		CRIT SOCKET PIN-74			PIN BW
GRN	"		CRIT SOCKET PIN-75			PIN BX
GRN	"		CRIT SOCKET PIN-76			PIN BY
GRN	"		CRIT SOCKET PIN-77			PIN BZ
GRN	"		CRIT SOCKET PIN-78			PIN CA
GRN	"		CRIT SOCKET PIN-79			PIN CB
GRN	"		CRIT SOCKET PIN-80			PIN CC
GRN	"		CRIT SOCKET PIN-81			PIN CD
GRN	"		CRIT SOCKET PIN-82			PIN CE
GRN	"		CRIT SOCKET PIN-83			PIN CF
GRN	"		CRIT SOCKET PIN-84			PIN CG
GRN	"		CRIT SOCKET PIN-85			PIN CH
GRN	"		CRIT SOCKET PIN-86			PIN CI
GRN	"		CRIT SOCKET PIN-87			PIN CJ
GRN	"		CRIT SOCKET PIN-88			PIN CK
GRN	"		CRIT SOCKET PIN-89			PIN CL
GRN	"		CRIT SOCKET PIN-90			PIN CM
GRN	"		CRIT SOCKET PIN-91			PIN CN
GRN	"		CRIT SOCKET PIN-92			PIN CO
GRN	"		CRIT SOCKET PIN-93			PIN CP
GRN	"		CRIT SOCKET PIN-94			PIN CQ
GRN	"		CRIT SOCKET PIN-95			PIN CR
GRN	"		CRIT SOCKET PIN-96			PIN CS
GRN	"		CRIT SOCKET PIN-97			PIN CT
GRN	"		CRIT SOCKET PIN-98			PIN CU
GRN	"		CRIT SOCKET PIN-99			PIN CV
GRN	"		CRIT SOCKET PIN-100			PIN CW

* - WIRES ADDED.

FIG. 50

SERIAL ENGINEER: STAL
 PROPERTY OF:
 E. G. MASON ENGINEERING, INC.
 MASON ENGINEERING INC.
 1700 POST RD FAIRFIELD CONN
 MPR-3
 2 X
 HIGH VOLTAGE & SAWTOOTH BDS, ASSY.
 9-3-57-1

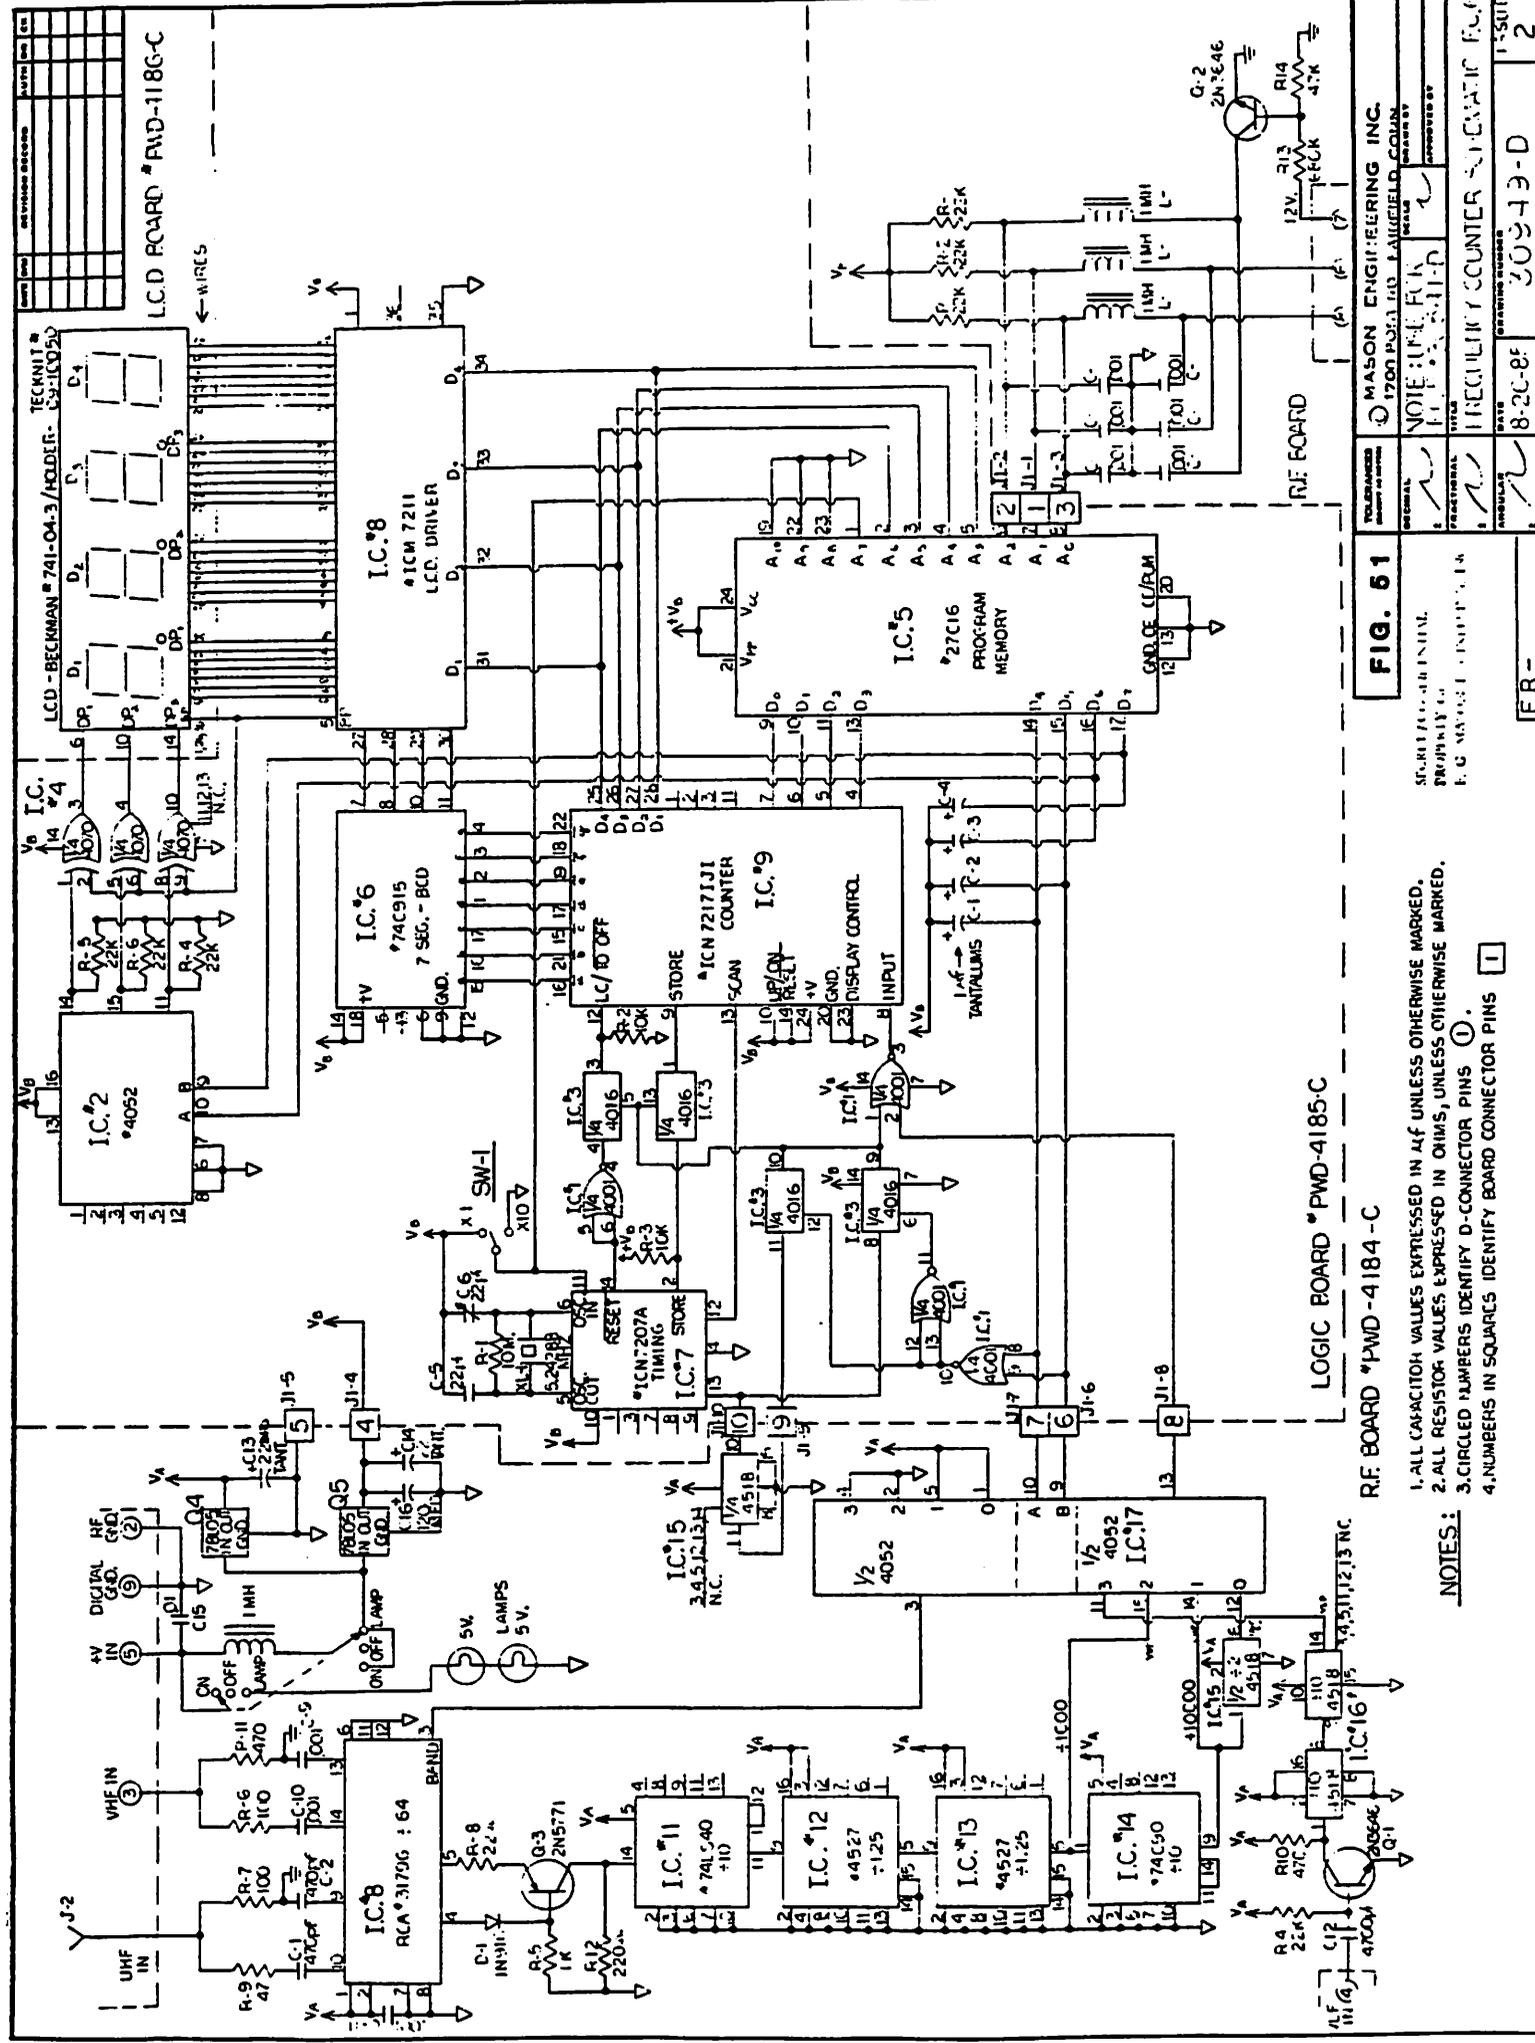


FIG. 61

MASON ENGINEERING INC.
1700 PASEO LINDENHOLM, COLLEGE PARK, MARYLAND

PROPERTY OF
E. G. MASON ENGINEERING INC.

DATE: 8-20-88
DRAWING NUMBER: 30313-D
1-SUIT: 2

- NOTES:
1. ALL CAPACITOR VALUES EXPRESSED IN μ F UNLESS OTHERWISE MARKED.
 2. ALL RESISTOR VALUES EXPRESSED IN OHMS, UNLESS OTHERWISE MARKED.
 3. CIRCLED NUMBERS IDENTIFY D-CONNECTOR PINS.
 4. NUMBERS IN SQUARES IDENTIFY BOARD CONNECTOR PINS.

E.R.

CIR. NO.	REQ.	PART NO.	PART DESCRIPTION
1	1	30-172-B	P.C. BOARD COMPLETE
2	1	30-474-A	6 PIN CONN. ASSY.
3	1	5769-A	CONN. SWITCH (CDDT)
4	1	5743-A	CONNECTOR
5	1	5298-A	PRESALER
6	1	4771-A	I.C. (74LS90)
7	2	4766-A	I.C. (4527)
8	1	4789-A	I.C. (74C 90)
9	2	4763-A	I.C. (4518)
10	1	4776-A	I.C. (4052)
11	3	5499-A	I.C. SOCKETS, 14 PIN
12	5	5500-A	I.C. SOCKETS, 16 PIN
13	2	4716-A	TRANSISTOR (2N3646)
14	1	1757-A	TRANSISTOR (2N5771)
15	2	4705-A	5V. REGULATOR, I.C.
16	2	6303-A	LAMPS
17	5	5427-A	TRANSISTOR SOCKETS
18	1	4558-A	DIODE (IN916)

C1	C2	19	2	0178	CAPACITOR .170PF							
C3	C4	C5	C6	C7	C8	C9	C10	C11	20	9	0030	CAPACITOR .001-1F
C12	21	1	0167	CAPACITOR .4700PF								
C13	C14	22	2	0082	CAPACITOR 22-1/2 TANT.							
C15	23	2	0035	CAPACITOR .01-1F								
C16	24	1	0111	CAPACITOR 120MF								
R1	R2	R3	R4	25	4	10-RRO-3-2	RESISTOR, 22K 1/4W 5%					
R5	26	1	10-TBR-3-2	RESISTOR, 1K 1/4W 5%								
R6	27	2	10-TBT-3-2	RESISTOR, 100Ω 1/4W 5%								
R7	28	1	10-RRB-3-2	RESISTOR, 22Ω 1/4W 5%								
R8	29	1	10-YVB-3-2	RESISTOR, 47Ω 1/4W 5%								
R9	30	2	10-YVT-3-2	RESISTOR, 470Ω 1/4W 5%								
R10	31	1	10-RRT-3-2	RESISTOR, 220Ω 1/4W 5%								
L1	L2	L3	L4	32	4	3902-A	CHOKE 1MH.					
L5	33	1	10-ASY-2-2	RESISTOR, 680K 1/4W 5%								
R11	34	1	10-YVO-2-2	RESISTOR, 47K 1/4W 5%								
R12	35	AR	STD.	CLEAR SLEEVING								
J-2	36	1	5660-A	MICON CONNECTOR								

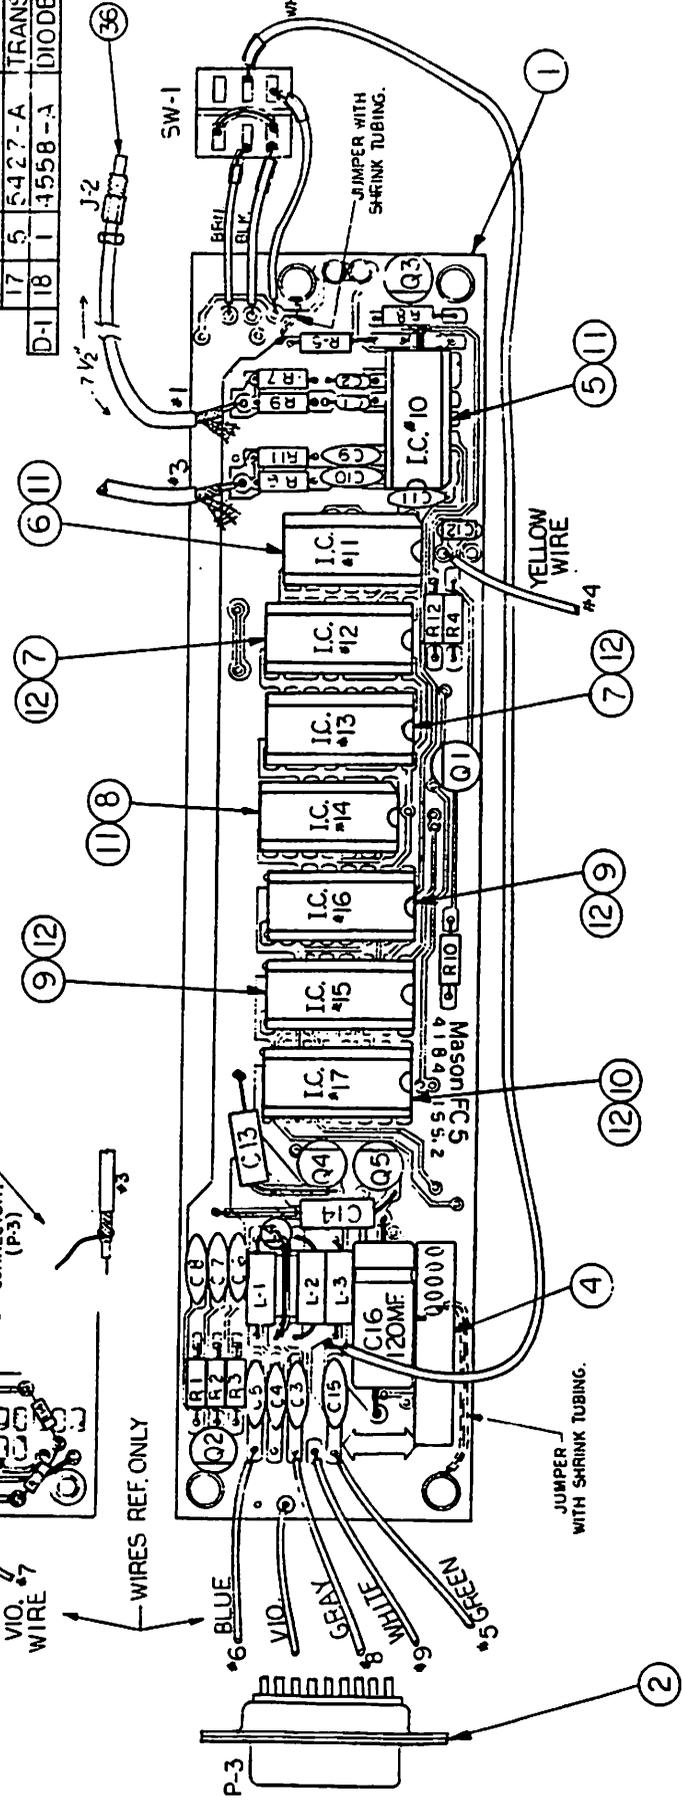
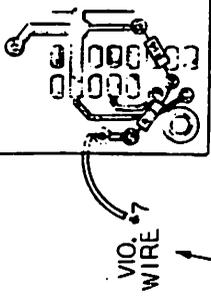


FIG. 62

SECRET (CONTINUED)
 PROPERTY OF
 MASCOM ENGINEERING, INC.
 1700 JEFFERSON PARK ELD. CO. IN.

TOLERANCES UNLESS OTHERWISE SPECIFIED
 DECIMAL FRACTIONAL
 .010 .020 .050 .100 .200 .500 1.000
 .005 .010 .020 .050 .100 .200 .500 1.000

SCALE 2 X
 DRAWN BY
 CHECKED BY

TITLE
 REF. PC. BOARD ASSEMBLY MER. FC.5
 DRAWING NUMBER
 3-5-82
 PWD-4184-C
 ISSUE

R-1	15	1	10-TBA-3-2	RESISTOR, 10MΩ, 1/4W, 5%
R-2	16	2	10-TBO-3-2	RESISTOR, 10K, 1/4W, 5%
R-4	17	3	10-RR0-3-2	RESISTOR, 22K, 1/4W, 5%
C-1	18	4	0048	CAPACITOR 1μF TANT.
C-5	19	1	0171	CAPACITOR 22μF.
	20	4	5499-A	14-PIN SOCKET
	21	1	5500-A	16-PIN SOCKET
	22	1	5501-A	28-PIN SOCKET
	23	1	5504-A	18-PIN SOCKET
	24	1	5514-A	24-PIN SOCKET
	25	1	5515-A	40-PIN SOCKET
	26	1	30476-A	LCD. BD. & FLATE ASSY.

QTY	PART NO.	PART DESCRIPTION
1	30473-B	P.C. BOARD COMPLETE
2	5713-A	CONNECTOR
3	5261-A	SWITCH
4	5045-A	CRYSTAL
5	2509-A	TRIMMER CAPACITOR
6	1717-A	I.C. (*4001)
7	4176-A	I.C. (*104052B)
8	4784-A	I.C. (*4016)
9	4785-A	I.C. (*4070)
10	4787-A	I.C. (*2716134E)
11	4788-A	I.C. (*74C915)
12	4750-A	I.C. (*ICM7207AH)
13	4791-A	I.C. (*MCM211AIR)
14	4792-A	I.C. (*N72171J1)

NOTE: USE PWD-4185-C FOR REFERENCE WHEN WIRING THIS BOARD.

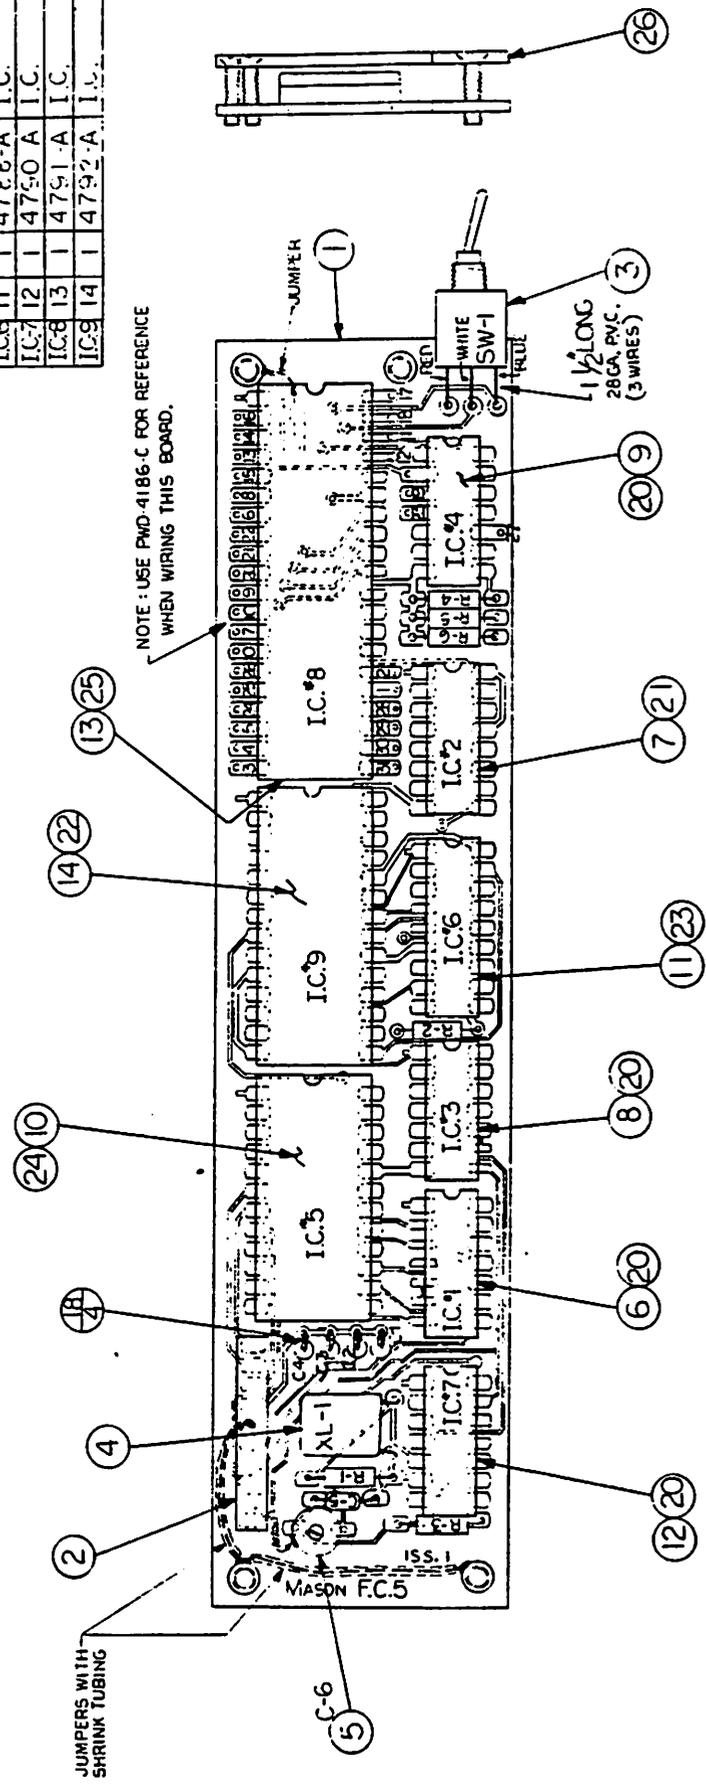


FIG. 63

REF ID: A66666
 PROPERTY OF
 F. G. HANSON ENGINEERING, INC.
 1700 H...
 1700 H...
 SCALE: 2X
 DRAWN BY: JPH
 CHECKED BY:

TOLERANCES	TITLE	SCALE	DATE	REVISION NUMBER	FIGURE
AS SHOWN UNLESS NOTED	M.P.R.	2X	12 4 81	PWD-4185 C	1/1
GENERAL					
FRACTIONAL					
DECIMAL					
MIL					
INCHES					

USED ON:
 1 30549-D
 1 30541-D

WIRING LIST:

QTY	WIRE COLOR	LENGTH
0	BLACK	
1	BROWN	
2	RED	
3	ORANGE	
4	YELLOW	
5	GREEN	
6	BLUE	
7	VIOLET	
8	GRAY	
9	WHITE	
10	WH./BLACK	
11	WH./BROWN	
12	WH./RED	
13	WH./ORANGE	
14	WH./YELLOW	
15	WH./GREEN	
16	WH./BLUE	
17	WH./VIOLET	
18	WH./GRAY	
19	BLK./BROWN	
20	BLK./RED	
21	BLK./ORANGE	
22	BLK./YELLOW	
23	BLK./GREEN	
24	BLK./BLUE	
25	BLK./VIOLET	
26	BLK./GRAY	
27	YEL./BROWN	
28	YEL./RED	
29	YEL./ORANGE	
30	YEL./GREEN	
31	YEL./BLUE	

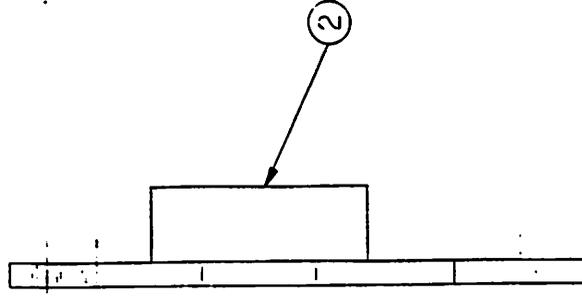
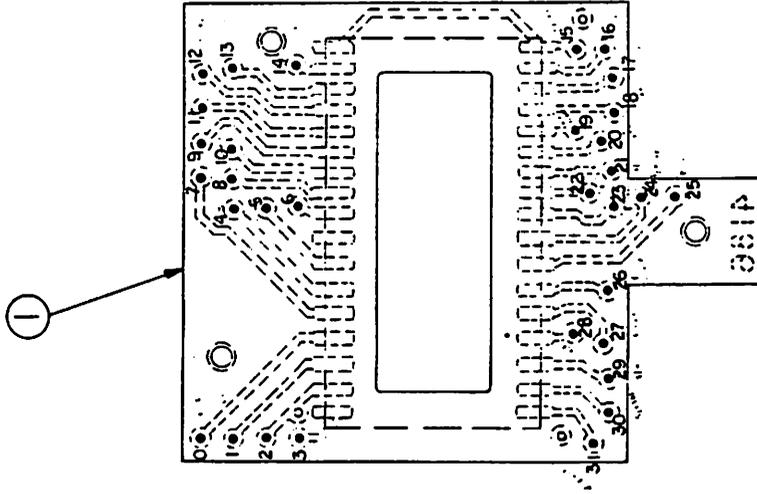


FIG. 54

QTY	NO. REQ.	PART NO. #	PART DESCRIPTION
1	1	AM-1186 B	P.C. BD.-AS MACH.
2	1	6296-A	L.C.D. DISPLAY
3	A/R		WIRE 32CA TEF-CN
4	1	6297-A	L.C.D. HOLDER

TOLERANCES UNLESS OTHERWISE SPECIFIED		DATE	ISSUE
GENERAL	.005	1/64	1
FRACTIONAL			
DECIMAL			
DRIVEN BY	4 X	DESIGNED BY	
L.C.D. P.C. BOARD ASSEMBLY MFR:FCG		DATE	ISSUE
P.W.D. 4186-C		3 5 82	1

ER-

WIRE LIST

ITEM	QTY	TYPE	LEN.
1. PIN #1	1	GPS SHIELD	4"
2. PIN #14	1	ENTER CONN.	4"
3. PIN #1	1	BLACK	4"
4. PIN #2	1	RED	4"
5. PIN #15	1	BRNCE	4"
6. PIN #16	1	WH. B. ACK	4"
7. PIN #2	1	RED	4"
8. PIN #10	1	CRANALE	4 1/2"
9. PIN #1	1	BLACK	4 1/2"

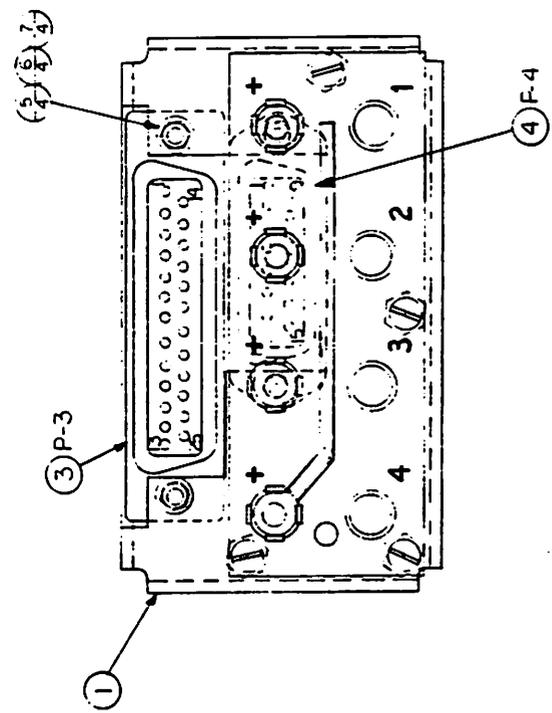
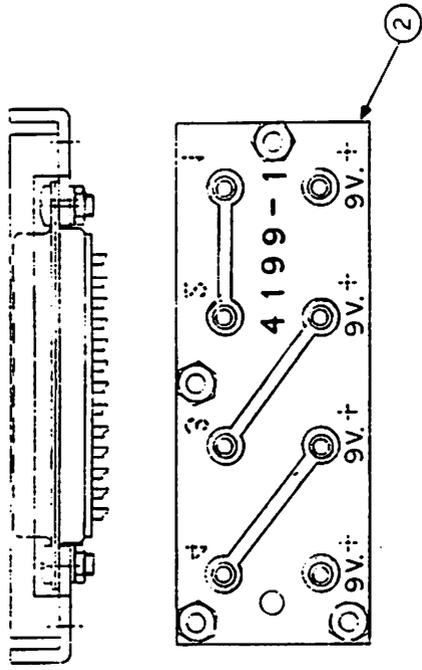


FIG. 57

QTY	ITEM	DESCRIPTION
1	4199-1	BATT. PACK F.A.S. PD.
1	4199-2	BATT. PACK F.A.S. PD.
1	4199-3	BATT. PACK F.A.S. PD.
1	4199-4	BATT. PACK F.A.S. PD.
1	4199-5	BATT. PACK F.A.S. PD.
1	4199-6	BATT. PACK F.A.S. PD.
1	4199-7	BATT. PACK F.A.S. PD.
1	4199-8	BATT. PACK F.A.S. PD.
1	4199-9	BATT. PACK F.A.S. PD.
1	4199-10	BATT. PACK F.A.S. PD.

DESIGNED BY	DATE	REVISION NUMBER	TITLE
APPROVED BY	2-19-84	30547-C	B-1C BATTERY PACK ASSEMBLY MGMT
FUNCTIONAL	DATE	REVISION NUMBER	TITLE
ISSUED	2-19-84	30547-C	B-1C BATTERY PACK ASSEMBLY MGMT

USED ON -